



2023 | V1

SHENZHEN MINGXUE OPTOELECTRONICS CO., LTD



2023 CATALOGUE

LEADING LED STRIP

Professional manufacturer




Professional LED strip light producer

info@mingxue.cn | Tel: 0755-27637866 | www.mingxuele.com

Office: 14F, Building T3 HIPARK Complex, Shiyan BaoAn District Shenzhen, China
Factory: Building 9 &10, WanYang Park ,BaoYong Industry road No 8, west area
BaoYong Industry Zone,LongJiang Town,Shunde District, Shunde District, Foshan City.



www.mingxuele.com

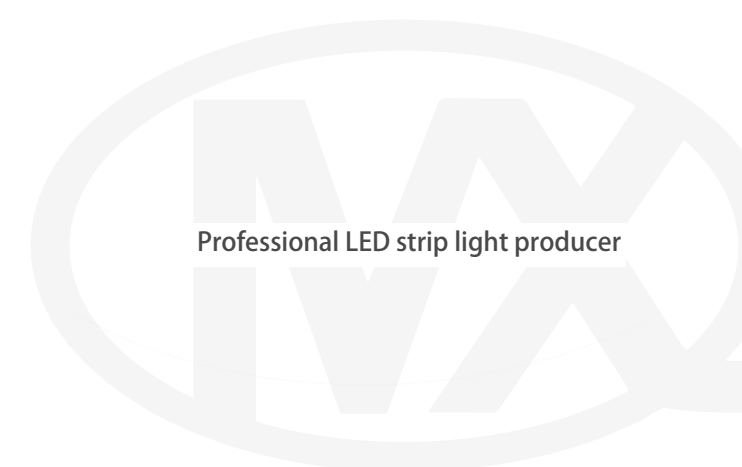



ABOUT US

Shenzhen Mingxue Optoelectronics Co., LTD., founded in 2005, is a national high-tech enterprise in China. Since its establishment, Mingxue has focused on LED packaging and application, and has become a leading manufacturer of high-quality LED components and LED strips. Mingxue's products are widely distributed in Europe, South America, North America and Asia Pacific region. The company has passed ISO 9001:2008 and ISO/TS 16949:2009 certifications. It pays attention to internal management, implements 6S management and standardized operation within the company, and strives to be more perfect. By setting quality management as one of the company's highest priorities, our focus is on continuously improving the quality level of our products. With better quality, professional service and customer-oriented philosophy, Mingxue has won the trust and recognition of customers all over the world. With more than 200 employees and more than 20 technicians, the company generated more than \$25 million in sales revenue in 2018. With advanced production facilities and skilled workshop workers, we have been committed to being a reliable supplier and partner for the LED lighting industry. So far, MX company has obtained a number of international certifications, including CE, ROHS, ERP, FCC, UL and PSE, to meet the needs of customers in different countries and regions. MX is dedicated to developing LED lighting products to help people reduce electricity and operating costs, increase user productivity, and help reduce carbon footprints worldwide. MX, you can trust!



18 years experience

We have been focusing on LED lighting industry since 2005, our R&D and sales department are in Shenzhen and factory in Foshan. As 18 years in LED lighting industry, we have rich experience in production and design.



Company

With Shenzhen as R & D and sales center, Foshan as production base, we are actively looking for distributors, agents and other partners at home and abroad.



Manufacturing base

A self-built factory of more than 24,000 square meters, with complete automatic and semi-automatic production equipments is our manufacturing base. We provide good quality, fast delivery, and production capacity is guaranteed. More than 1000 square meters office in Shenzhen for R & D and sales department helps us better serve our customers.



Certification system

MX has passed the ISO9001 and ISO/IATF16949 quality system certifications, and we also got the mainstream markets' product certifications such as CE, ROHS, ERP, FCC, UL, ETL, PSE and so on.



Product globalization

Products are sold to many countries and regions around the world, we have large share in Europe and the United States market. Besides, we cooperated with well-known enterprises in led strip industry domestic and overseas.



Product system

Products cover COB/CSP strip, high voltage strip, high efficiency strip, high density strip, magic series, neon strip and tunable led strip series.

COMPANY PROFILE

2005~2023

2005

Founded in 2005,
50 Employees.

2006

BUILDING SMT
Producing
Workshop in 2006.

2007

Buildind SMD
Producing
Workshop in 2007.

2008

Enlarging SMT
Producing Workshop
in 2008, Certified
ISO9001:2008.

2009

Sales up to 10 Million
USD, Enlarging SMT
again in 2009.

2010

Enlarging SMD
Producing Workshop
in 2010.

2012

Enlarge factory,
up to 15, 000 square
meters in 2012, total
6 floors.

2013

Sales up to 20
Million USD in 2013,
up to 200 Employees.

2016

Developing Hight
Power LED Grow Light
in 2016,Sales up to 30 Million
USD in 2016, up to 300 Employees.

2019

The company introduced
advanced automatic welding
production line, put into
production COB soft lamp
belt production line.

2018

Building a new show
Room for LED New
products on 2018.

2020

Our production base
settled down to Shunde.
We added the SMT machine
to 14pcs. The capacity of
auto soldering strip reached
24 millinon meter per month.

2021

Successful mass
production of CSP
lamp strip.Introduction
of infinite patch equipment.

2022

Sales and R&D center was relocated
to the office building of Haigu
Science and Technology Building
in Shenzhen. In the same year, the
production base was also relocated
to Shunde, Foshan, and Foshan
Mingxue Branch was established.
Realize the separation of production
and sales, improve the company's
market competitiveness.

Certificate of Honor

About product certification

Products have passed the certification required by the market.With complete quality system and verification process,the quality is guaranteed. Different series for different markets, products can be designed to meet the requirements of certification, strong coordination, can help customers get more orders.



In order to adapt to market demand,we get different certifications for strip lights like UL,ETL,ErP,CE,ROHS, REACH,UKCA,LM-80,IP rating test report and so on. All of our products will pass standard quality verification process before ship out.



FACTORY OVERVIEW

About the factory and the showroom

A self-built factory of more than 24,000 square meters, with complete automatic and semi-automatic production equipment. Production capacity is guaranteed, provide good quality and fast delivery. Intelligent exhibition hall, to show customers the diversity of products. Rich production experience can reduce the problem of more products.



EMPLOYEE PRESENCE

About employee culture

Staff have regular training and team building activities, independent learning ability, high acceptance ability. Employees often share their ideas with each other, which helps us have a better sense of team spirit and innovative thinking. Employees have a wide range of interests, including sports, cooking, and the arts




Excellent Color Consistency

ONE Binning

Make one order, one Bining, and ensure each order make the same Color.

More and more customers ask Rf and Rg index, and Let's make IES Rf/Rg versus CIE Ra, like the following photo.

BIN-Color Color consistency
LED Color BIN definition(CIE 1931 UCS)

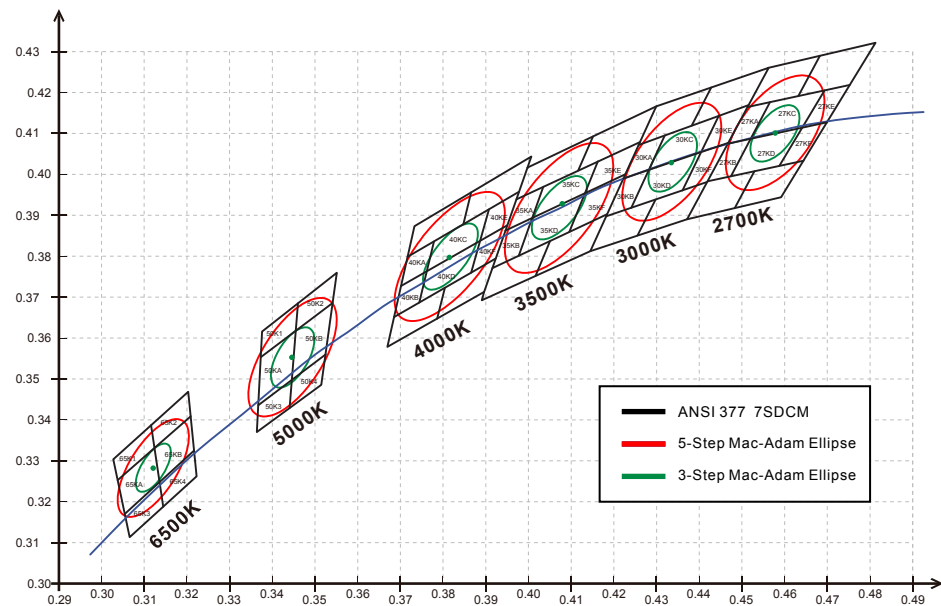

5-Step Mac-Asam Ellipse

CCT	CCT range	Duv Range
2700 K	2725 K ± 100	0.000 ± 0.006
3000 K	3045 K ± 120	0.000 ± 0.006
3500 K	3465 K ± 175	0.000 ± 0.006
4000 K	3985 K ± 200	0.000 ± 0.006
5000 K	5028 K ± 200	0.000 ± 0.006
6500 K	6530 K ± 350	0.002 ± 0.006

3-Step Mac-Asam Ellipse

CCT	CCT range	Duv Range
2700 K	2725 K ± 60	0.000 ± 0.006
3000 K	3045 K ± 70	0.000 ± 0.006
3500 K	3465 K ± 100	0.000 ± 0.006
4000 K	3985 K ± 120	0.000 ± 0.006
5000 K	5028 K ± 120	0.000 ± 0.006
6500 K	6530 K ± 200	0.000 ± 0.006

2-Step Mac-Asam Ellipse

CCT	CCT range	Duv Range
2700 K	2725 K ± 40	0.000 ± 0.006
3000 K	3045 K ± 50	0.000 ± 0.006
3500 K	3465 K ± 70	0.000 ± 0.006
4000 K	3985 K ± 80	0.000 ± 0.006
5000 K	5028 K ± 80	0.000 ± 0.006
6500 K	6530 K ± 150	0.000 ± 0.006

PCB type		5W/M	5W/M	5W/M	10W/M	10W/M	10W/M	15W/M	15W/M	15W/M
PCB 3OZ 35=70		6LED/Group	7LED/Group	8LED/Group	6LED/Group	7LED/Group	8LED/Group	6LED/Group	7LED/Group	8LED/Group
24V	12mm PCB	20M	17M	12M	16M	12M	9M	13W/M	10M	8M
24V	10mm PCB	19M	15M	11M	12M	9M	7M	10M	8M	7M
24V	8mm PCB	18M	13M	10M	11M	8M	6M	9M	7M	5M

Color Division

Comapring of Color Difference 5SDCM/3SDCM/2SDCM

5-Step Mac-Adam Ellipse



3-Step Mac-Adam Ellipse




2-Step Mac-Adam Ellipse



LED STRIP STRUCTURE

Double layer copper pcb
3 ounce(3 oz)

Mingxue Brand

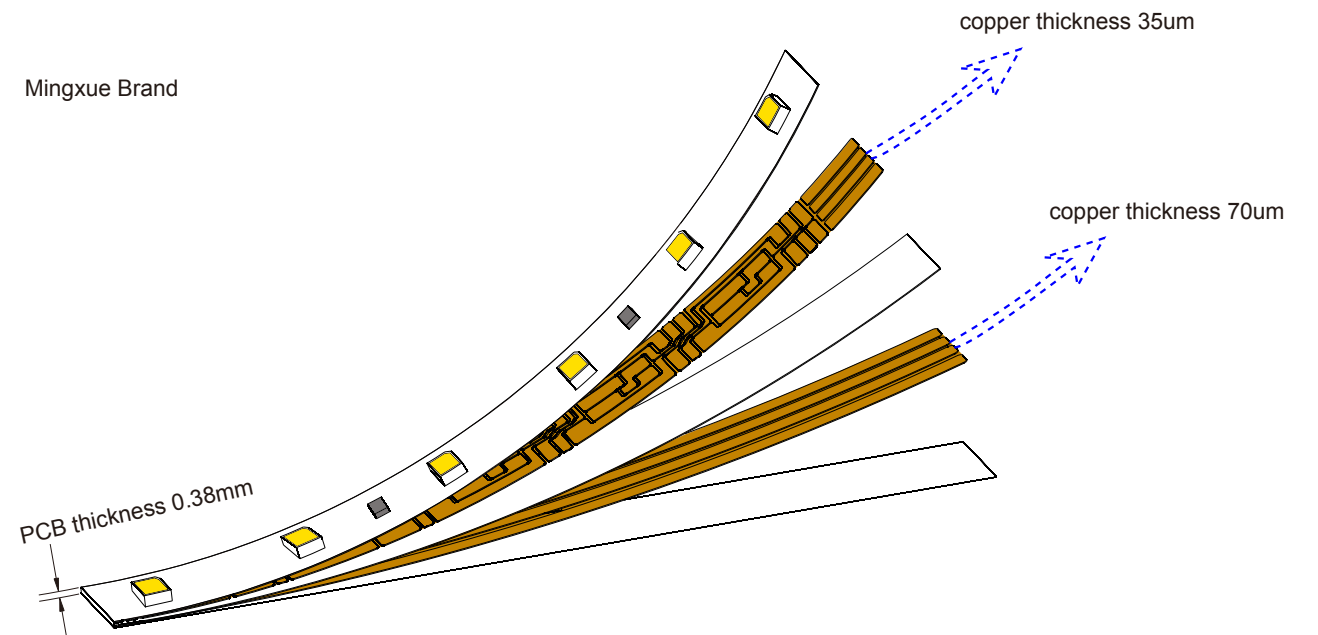

x y Coordinate of 3-and 5-step MacAdam ellips

3-and 5-step MacAdam ellipse color bin definitions at 60mA,hot-color targeted at

NOMINAL CCT	COLOR SPACE	CENTER POINT (Cx, Cy)	MAJOR AXIS (a)	MINOR AXIS (b)	ELLIPSE ROTATION (ANGLE, θ)
2700K	Single 3-step MacAdam ellipse	(0.4578,0.4101)	0.00810	0.00420	53.70°
	Single 5-step MacAdam ellipse	(0.4578,0.4101)	0.01350	0.00700	53.70°
3000K	Single 3-step MacAdam ellipse	(0.4338,0.4030)	0.00834	0.00408	53.22°
	Single 5-step MacAdam ellipse	(0.4338,0.4030)	0.01390	0.00680	53.22°
3500K	Single 3-step MacAdam ellipse	(0.4073,0.3917)	0.00927	0.00414	54.00°
	Single 5-step MacAdam ellipse	(0.4073,0.3917)	0.01545	0.00690	54.00°
4000K	Single 3-step MacAdam ellipse	(0.3818,0.3797)	0.00939	0.00402	53.72°
	Single 5-step MacAdam ellipse	(0.3818,0.3797)	0.01565	0.00670	53.72°
5000K	Single 3-step MacAdam ellipse	(0.3447,0.3553)	0.00822	0.00354	59.62°
	Single 5-step MacAdam ellipse	(0.3447,0.3553)	0.01370	0.00590	59.62°
6500K	Single 3-step MacAdam ellipse	(0.3123,0.3282)	0.00669	0.00285	58.57°
	Single 5-step MacAdam ellipse	(0.3123,0.3282)	0.01115	0.00475	58.57°

Notes:
maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.

LIGHT SOURCE



Spectrum Analysis

ITEM: Spectrum Analysis
STANDARD: LM 79
DESCRIPTION: LM 79(lumen,CCT,CRI,XY,SDCM,wave length)

* For detail testing reports, please contact our sales person.

PHOTOMETRIC TEST

Spectrum Analysis
Photometric Distribution
Lumen Maintenance&Life Time

ELECTRICAL TEST

ESD test
EMC Test(EMI & EMS)

MECHANICS & PHYSICE TESTING

Bending Test Vertical
Bending Test Horizontal
Swing Test
Tensile Test
Twist Test
Adhesion test

ENVIRONMENT TESTING

Heating test
Salt Spray Test
High temperature and Humidity impact
Temperature Shock Test
UV Exposure Test
IPX5 IPX6 IPX7 IPX8 Test

Photometric Distribution

ITEM:Photometric Distribution
STANDARD:LM 79
DESCRIPTION: LM 79(lumen intensity distribution&Lux diagram))




UV Exposure Test

ITEM: UV Exposure Test
STANDARD: ASTM G154-06
DESCRIPTION: ASTM G 154,ISO 4892-3, UVA@340nm
ASTMG154-06, UVA-340 0.68W/m2 for 300 hrs




PRODUCT VIEW


Lumen/M MAX

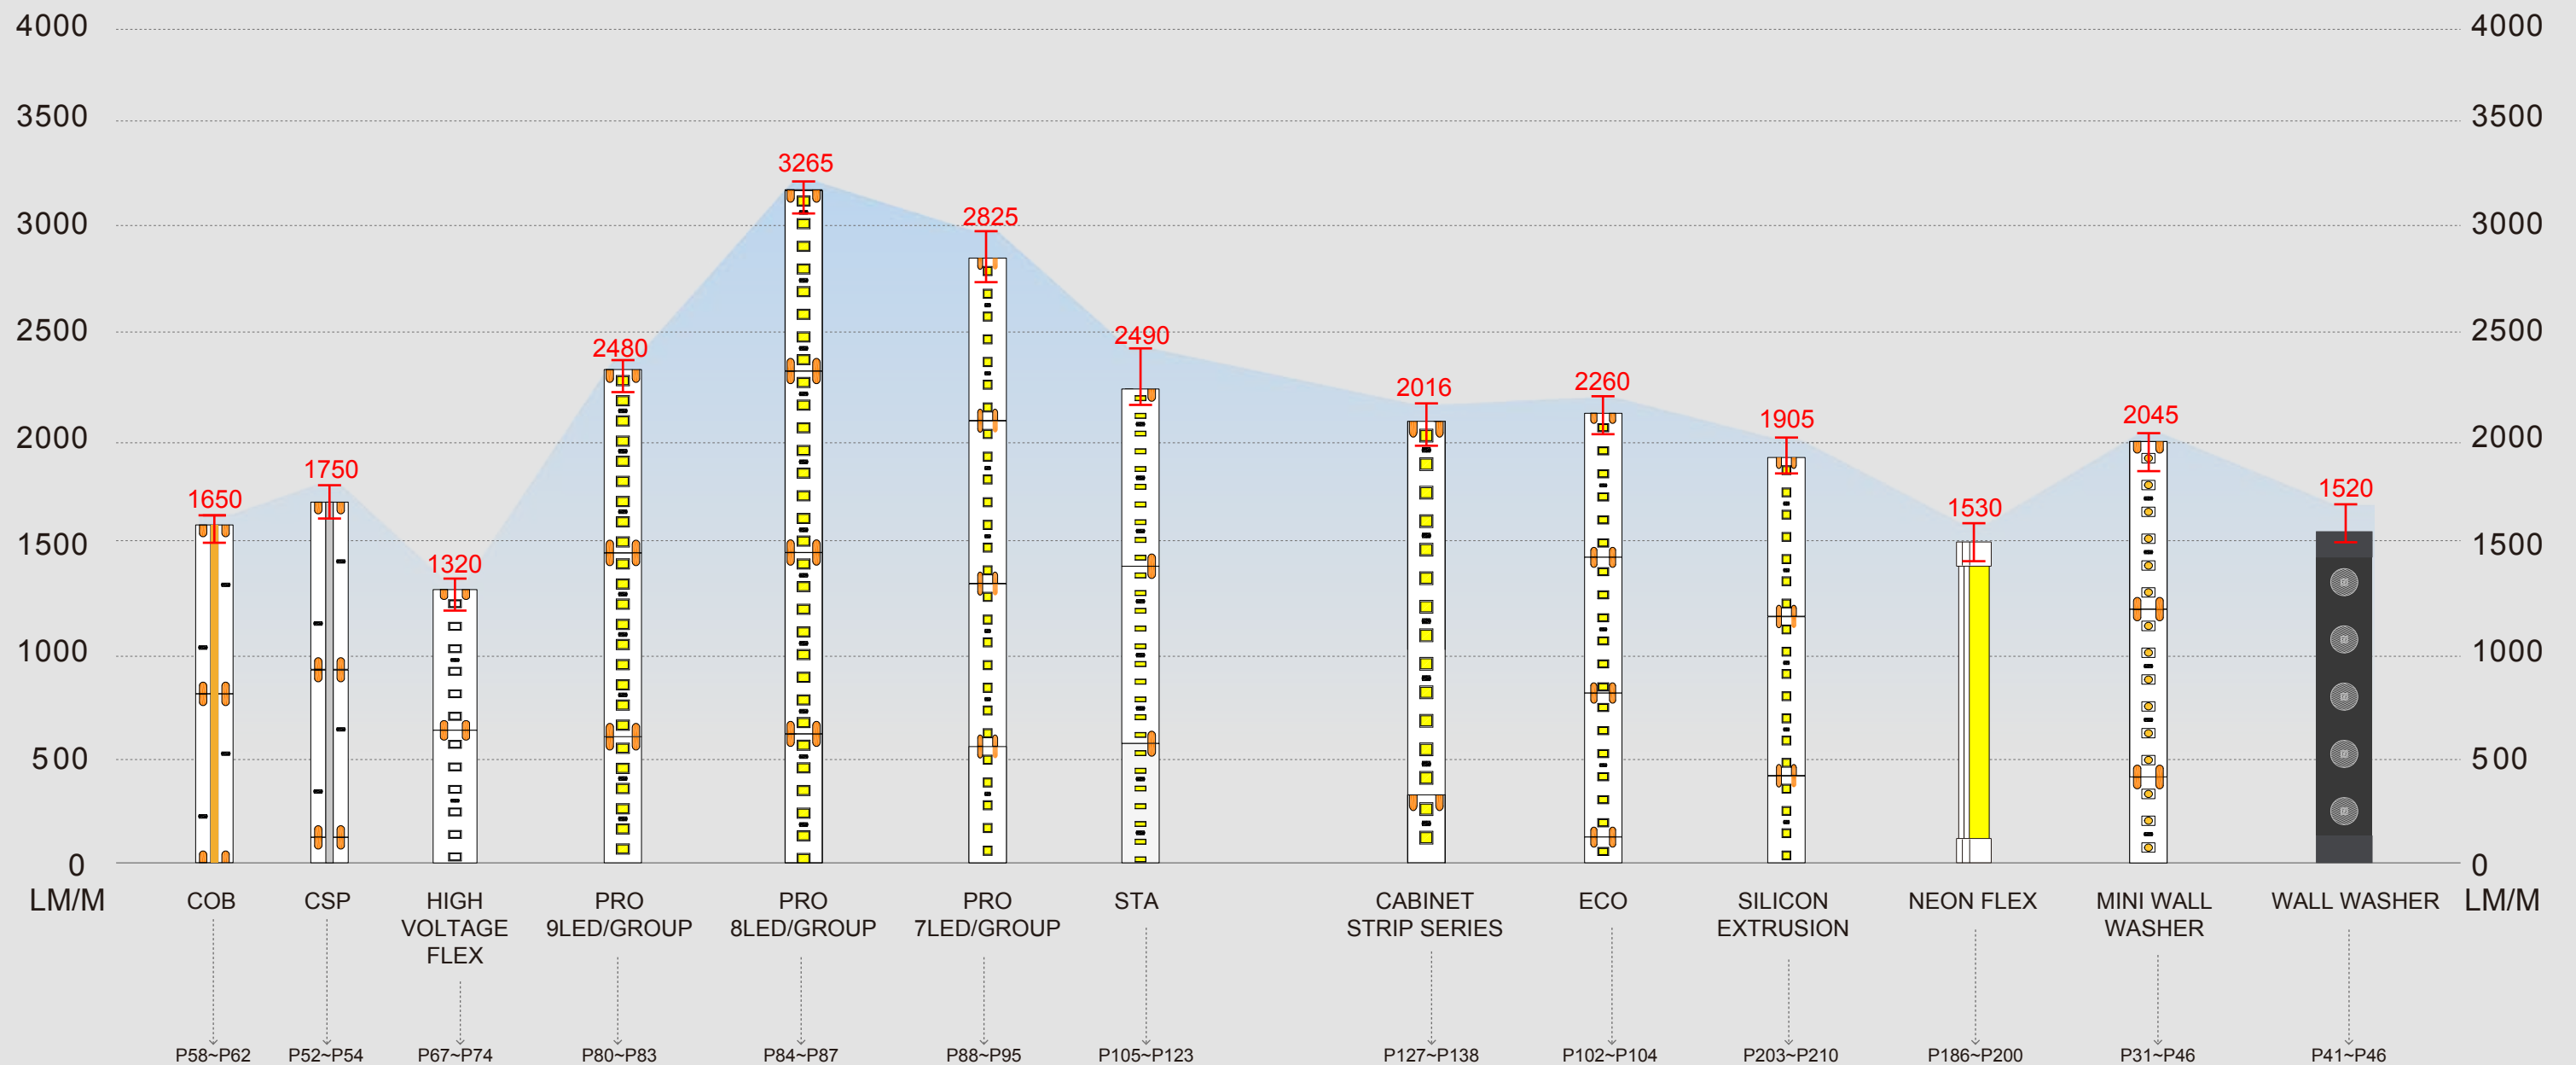

PRODUCT VIEW

Eff MAX

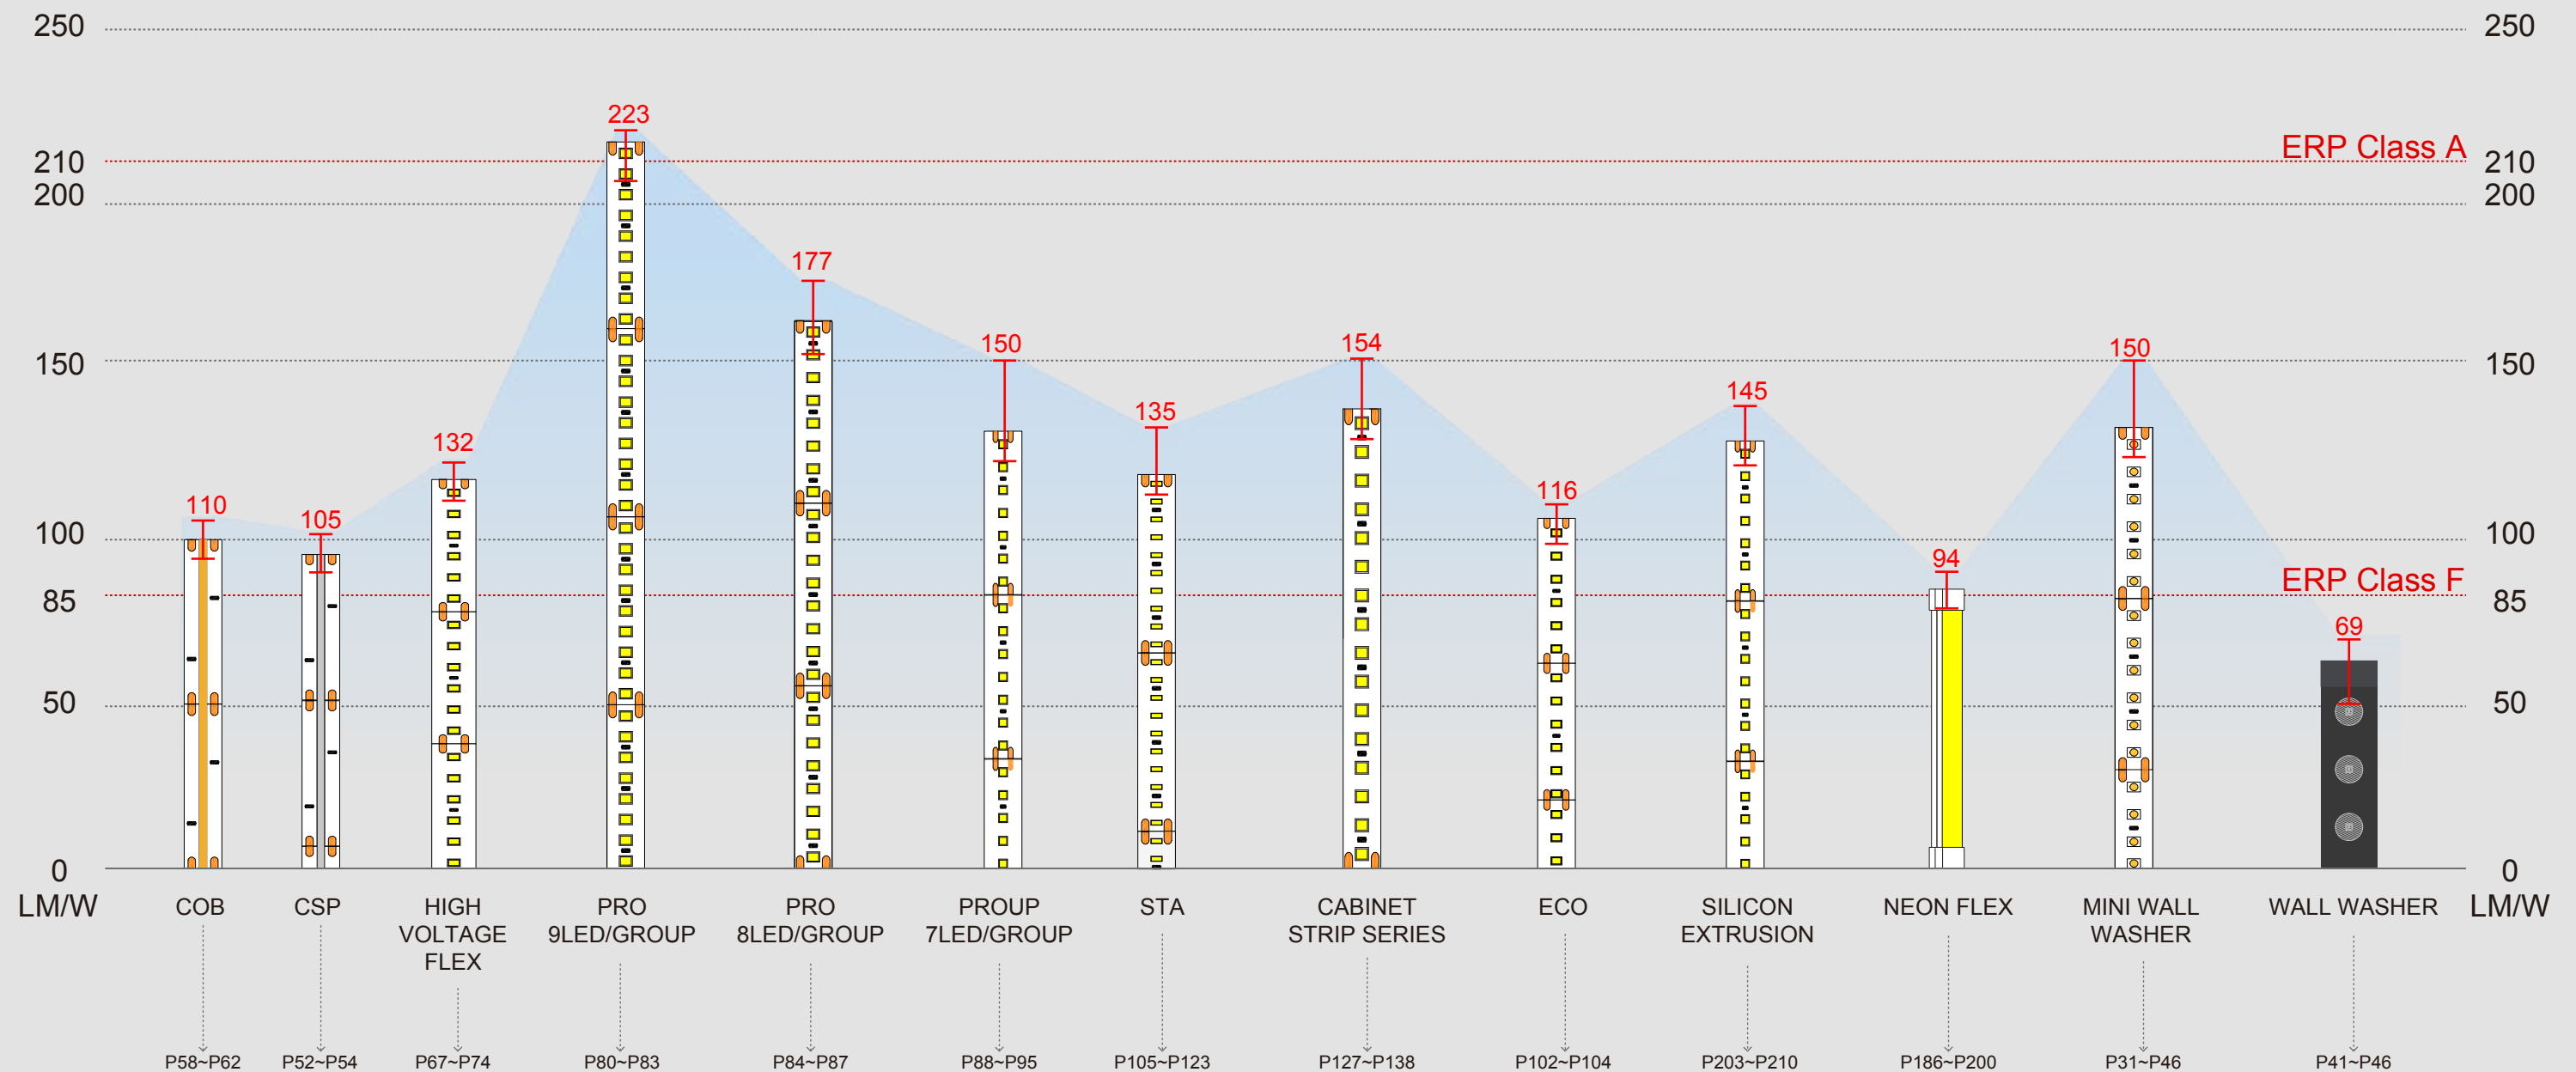




CCT-Color Temperature

Color Temperature,commoly abbreviated as CCT.
Color temperature describes the color emitted from a light source,and has a direct and more immediate influence on the apperance of an object.

CCT is a number,measured in degrees Kelvin,that helps to describe the relative warmth or coolness of a light source.Most LED Light range from 2700K(Warm White Color,like nightfall and morning) to 5000K or higher(white daylight color,like afternoon time)

Simulating the sunlight with reference to the 12-hour sunlight color in the daytime , hepls us to produce LED strips which are infinitely close to sunlight to make people comfortable.As shown in the picture on the right.

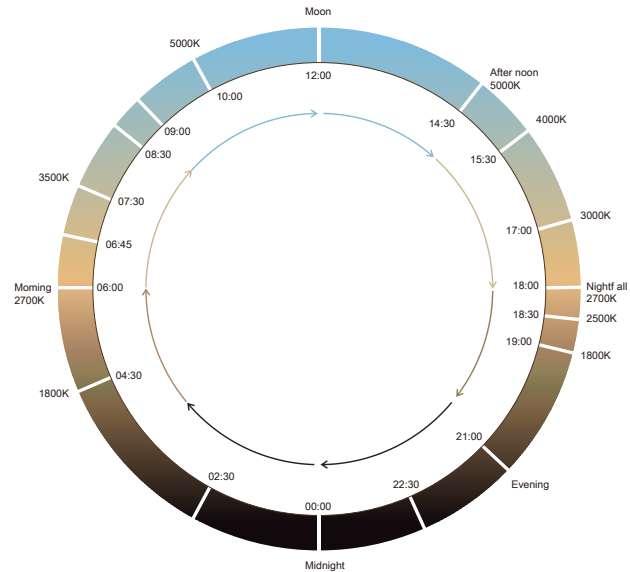

CCT Application

When we use an artificial light source such as an LED light,we are attempting to “reproduce” the colors of natural daylight in order to help the objects appear the same as they do when they are under natural day light.

For most residential applications,2700K and 3000K are preferred color temperature options as they both create an inviting and relaxing environment.


For retail or commercial applications,4000K is a popular color option for a crisper,energetic shade of white. For industrial or task-oriented acpplication,5000K or 6500K are preferred color options as these color tempertures best match natural daylike.




2700K-3000K Application



4000K-6500K Application

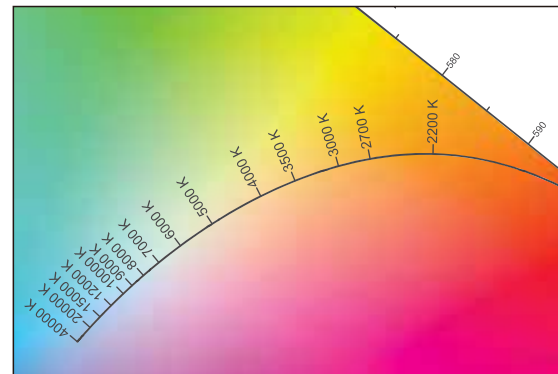


Reference to Colormetrics CIE 1931



CRI-Color Rendering Index

Put simply,the Color Rendering Index(CRI) measures the ability of a light source to accureately reproduce the colors of the object it illuminates.If without a high CRI light source,objects can appeare faded,dull or inaccurate. CRI values over 90 are considered as excellent,while scores below 80 are considered as poor.(the below fig.)



CRI>90



CRI>80



CRI>70



Extended CRI


Extended CRI is calculated as the average value of R1 through R15.Notably,extended CRI captures the influence of saturated colos such as deep RED(R9) and strong BLUE (R12).

CRI can be further borken down into sub-scores know as”R” values,which aslo have a mximum of 100. Each”R” value represents the light source’s color rendering ability for particular color or object.



R9

R9 score of 50 or above woule be considered as”good”,while R9 score of 90 above considered”excellent.”

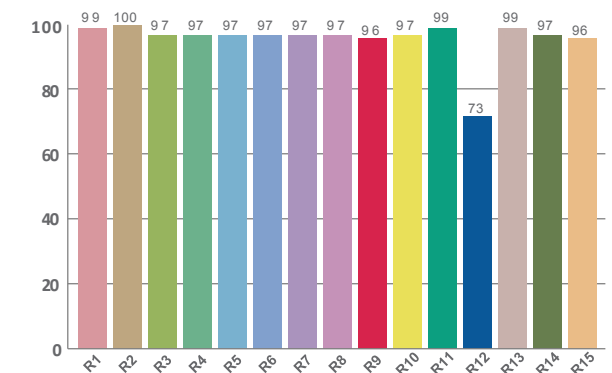

Value of R1-R15

Why is Deep RED(R9) an important color?

If an artificial light source lacks red emission,it will perform poorly on the R9 scale, and also make the objects look pale,or even green.







When searching for a high color quality LED,be sure to inquire about CRI value as well as its R9 value.

24V Voltage Drop & Wire Length Distance Chart

Wire (AWG)	LED Strip 15W/M	60W Driver	80W Driver	100W Driver	150W Driver	200W Driver	350W Driver
12	12V/24V/48V	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m
14	12V/24V/48V	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m
16	12V/24V/48V	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m
18	12V/24V/48V	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m
20	12V/24V/48V	4m/5m/10m	4m/5m/10m	14m/5m/10m	14m/5m/10m	14m/5m/10m	14m/5m/10m
22	12V/24V/48V	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m	4m/5m/10m


*Nodt: The test data base on main wire Max length is 5M

ELECTRICAL WIRING COLOR CODES

MONOCOLOR		Red: V+ Black: GND	
CCT		Black: V+ White: C Yellow: W	
RGB		Black: V+ Red: R Green: G Blue: B	
RGBW		Black: V+ Red: R Green: G Blue: B White: W	
SPI		Red: V+ White: DAT Black: GND	
DMX		Black: GND Red: A Green: B Blue: Pl/PO White: V+	
RGBCCT		Black: V+ Red: R Green: G Blue: B White: C Yellow: W	

IP

Degree of protection against the penetration of solid bodies(1st digit) and against liquids(2nd digit).

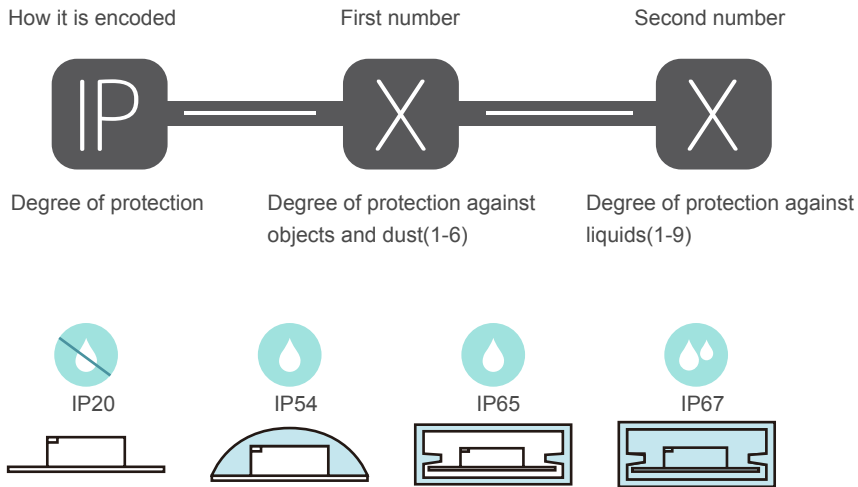

First number

Not protected	Protected against solid bodies of more than 50mm	Protected against solid bodies of more than 12mm	Protected against solid bodies of more than 2.5mm
Protected against solid bodies of more than 1mm	Protected against the penetration of dust	Completely dust-tight	

Second number

Not protected	Protected against the vertical drop of water droplets	Protected against vertical drops of water droplets with a maximum inclination of 15°	Protected against fine rain(sprayed)	Protected against water projections
Protected against water jets	Protected against strong jets of water or against the rough sea	Protected against the effects of temporary immersion	Protected against prolonged immersion	

Item Code

M	F	3	28	W	030	A	80	D	027	A		1	A	10	01	N	04	08	Z	A
company	product category	voltage	LED type	color of strip	LEDs per meter	IP rating	Color rendering index	color of PCB	Color temperature	wire Connection		3M tape	PCB printing type	PCB width	Series and parallel	Control mode	width of Noen	height of Neon	Luminous surface	Neon Outlet mode
Mingxue	F:flexible strip R:Aluminum strip N:Neon strip	1:DC5V 2:DC12V 3:DC24V	04:CSP 09:COB 2L:2835 Lens	W:white Z:RGBW U:CCT	(0)30:30 LED/M (0)60:60 LED/M	A:IP20 C:IP65 E:IP67	70:RA70-79 80:RA80-89 90:RA90-94	A:yellow C:white E:black	027:2700K 030:3000K 065:6500K	A:red black wire I:3 PIN wire J:4PIN wire		1:yellow 3M tape 2:white 3M tape 3:red 3M tape	A:with scissors without logo C:with scissors with logo T:Other special	05:5mm 10:10mm 12:12mm	01:1 led 1 series 09:9 leds 1 series	N:no control S:SPI X:DMX	04:4mm width 12:12mm width 20:20mm width	08:8mm height 12:12mm height 25:25mm height	Z:top view C:side view Y:360 degree lighting	A:Linear Outlet Injection Molded

Company name (fixed)Variable parameter

IP rating

products	 A:Naked PCB	 T:Nano Coating	 C:PU glue coating D:Silicone glue coating	 E:PVC extrusion	 G:Silicone tube	 H:PU tube & PU gule coating	 Q:Hollow Silicone Extrusion	 F:Silicone tube	 S:Solid Silicone Extrusion
CSP Series	✓		✓			✓		✓	
COB Series	✓		✓			✓		✓	
HIGH VOLTAGE				✓					✓
SMD Pro	✓	✓	✓		✓	✓	✓	✓	
SMD STA	✓	✓	✓		✓	✓	✓	✓	
SMD ECO	✓	✓	✓		✓	✓	✓	✓	
Cabinet	✓	✓	✓						
Pixel	✓		✓						
Silicon							✓		
Neon							✓		✓
Mini Wallasher	✓						✓		
Wallasher							✓		

Extrusion material comparison

compared item	silicone	PVC	PU
UV/ yellowing resistance	★★★★★	★★★☆☆	★★★★☆
High temperature resistance (ambient)	 250°C	 80°C	 80°C
Low temperature resistance (ambient)	 -50°C	 -20°C	 -20°C
Enviromental protection	★★★★★	★★★☆☆	★★★★★
Adsorbability	★★★★★	★★★☆☆	★★★★☆
Formaldehyde resistance			
Strong acid resistance	★★★★★	★★★☆☆	★★★★★
Strong alkali resistance	★★★★★	★★★☆☆	★★★★☆
Heat dissipation			
Color temperature consistency			
Tensile strength	★★★★★	★★★★★	★★★★☆

Note: Please refer to the instruction manual for electronic parts

NEON connection ways and accessories
(Neon products:page186~200)

Single color

CCT

RGB








RGBW

RGB SPI

RGB DMX

DIMENSION			0910 Hollow extrusion	1312 Hollow extrusion	1514 Hollow extrusion	0805 Hollow extrusion	1005 Hollow extrusion	1205 Hollow extrusion	1506 Hollow extrusion	1010 Solid extrusion		1010 Pro Solid extrusion	1212 Solid extrusion	1616 Solid extrusion	0408 Hollow extrusion	0612 Solid extrusion	0816 Solid extrusion	1220 Solid extrusion	0817 Solid extrusion	1225 Solid extrusion	1616 Solid extrusion	360 D25 Solid extrusion	3D 1616 Solid extrusion	
Accessory type	Photo	IP Rate																						
Light direction		IP65	Top view										Side view										Top/Side view	
Linear outlet Snap Connector		IP65																						
Left outlet Snap Connector		IP65																						
Right Outlet Snap Connector		IP65																						
Bottom Outlet Snap Connector Monocolor		IP65																						
Snap End Connector		IP65																						
Linear Outlet Injection Molded Connector		IP65																						
Right Outlet Injection Molded Connector		IP67																						
Left Outlet Injection Molded Connector		IP67																						
Bottom Outlet Injection Molded Connector		IP67																						
Injection Molded End Connector		IP67																						
Linear Outlet Plug Fit Silicone Cap		IP67																						
Left Outlet Plug Fit Silicone Cap		IP67																						
Right Outlet Plug Fit Silicone Cap		IP67																						
Bottom Outlet Plug Fit Silicone Cap		IP67																						
Injection Molded Plug Fit Silicone Cap		IP67																						
Aluminium Profile		IP65																						
Silicone cap		IP65																						
PC Profile		IP65																						
Recessed Aluminium		IP65																						
Stainless Steel Brackets		IP65																						

PRODUCTS
CATALOG

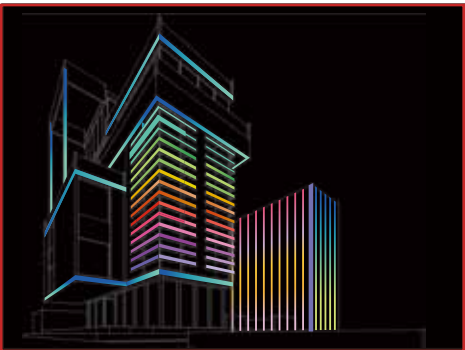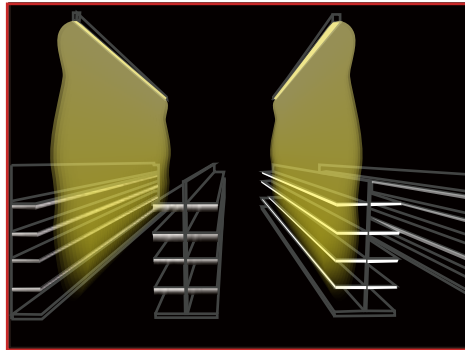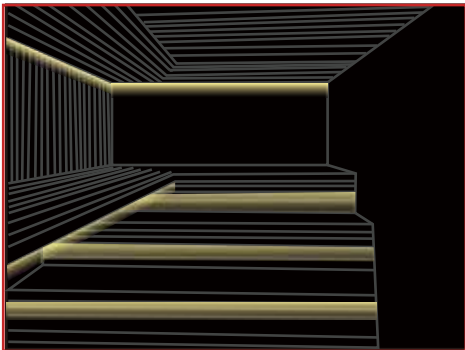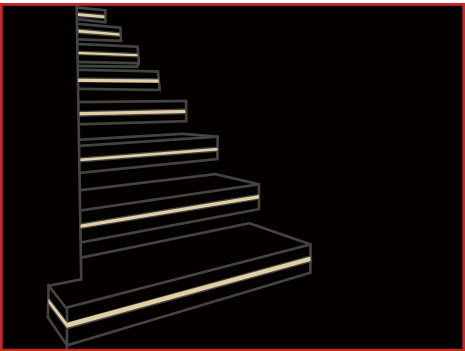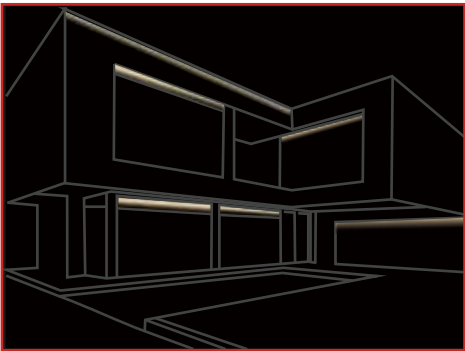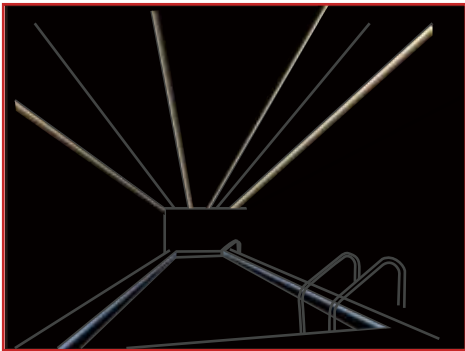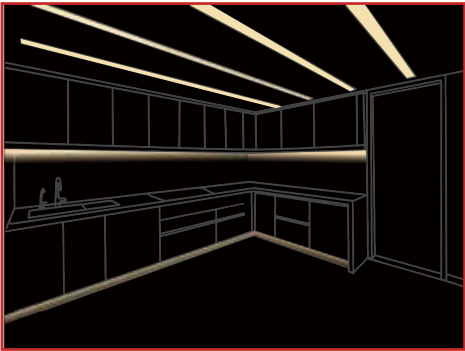

MX 01
WALL WASHER SERIES

2835SMD/126LED-STA.....	31
2835SMD/84LED-CV	32
2835SMD/1112LED-CV.....	33
2835SMD/126LED-CV.....	34
2835SMD/1112LED-PRO DMX.....	35
2835SMD/140LED-PRO DMX CCT	36
2835SMD/126LED-Pro.....	37
2835SMD/140LED-Pro CCT	38
3535SMD/24LED 10°60°	41
3535SMD/24LED 20°30°	42
3535SMD/24LED 45°	43
3535SMD/24LED 20°30° DMX RGBW.....	44
3535SMD/24LED 45° DMX RGBW.....	45
3535SMD/24LED10°60° DMX RGBW.....	46
5050SMD/60LED RGB.....	47

MX 02
CSP SERIES

CSP CCT 640LED	52
CSP RGB 840LED	53
CSP RGBW 840LED	54

MX 03
COB SERIES

COB 280LED	58
COB 320LED	59
COB 420LED	60
COB 480LED	61
COB 512LED	62

MX 04
HIGH VOLTAGE FLEX

CCT Tunable DALI DT8	66
Single color DALI DT6	67
0-10V Dimming	68
120V 2835SMD/120LED	69
120V 2835SMD/60LED	70
120V 2835SMD/72LED	71
230V 2835SMD/72LED	72
230V 2835SMD/60LED	73
230V 2835SMD/120LED	74

MX 05
PRO LED FLEX

2835SMD/90LED	80
2835SMD/126LED	81
2835SMD/180LED	82
2835SMD/234LED	83
2835SMD/80LED	84
2835SMD/112LED	85
2835SMD/160LED	86
2835SMD/240LED	87
2835SMD/70LED	88
2835SMD/126LED	89
2835SMD/140LED	90
2835SMD/168LED	91
2835SMD/196LED	92
2835SMD/210LED	93
2835SMD/238LED	94
2835SMD/140LEDs Fresh Flex.....	95

MX 06
STA LED FLEX

2835SMD/60LED ECO	102
2835SMD/120LED ECO.....	103
2835SMD/240LED ECO.....	104
2216SMD/240LED STA	105
2216SMD/300LED STA	106
2216SMD/420LED	107
2110SMD/560LED.....	108
2110SMD/700LED	109
3528SMD/60LED	110
3528SMD/120LED	111
3528SMD/240LED	112
5050SMD/30LED ECO	113
5050SMD/60LED	114
5050SMD/120LED	116
3014SMD/120LED	117
3014SMD/280LED	118
3014SMD/300LED	119
2835SMD/60LED S-type	120
5050SMD/60LED RGB S-type	121
5050SMD/42LED RGBW S-type	122
3014 SIDE VIEW 140LED	123

MX 07
CABINET STRIP SERIES

COB 400LED 5MM.....	127
12V-2835-120LED 4MM.....	128
12V-2835-120LED 5MM.....	129
2835-150LED 5MM.....	130
3014SMD/240LED 5MM.....	131
2216SMD/120LED	132
2216SMD/192LED	133
2216SMD/204LED 4MM.....	134
2835SMD/140LED 5MM.....	135
2835SMD/120LED Ultra Long.....	136
2835SMD/160LED 48V.....	137
2835SMD/168LED 24V	138

MX 08
DYNAMIC & PIXEL FLEX


2835168LEDs Dim to warm.....	142
2835WW+W/120LEDs.....	143
2835WW+W/168LEDs.....	144
3014WW+W/240LEDs	145
2216WW+W/240LEDs.....	146
2835WW+W/240LEDs.....	147
3527WW+W/120LEDs.....	148
5050RGB/30LEDs	149
5050RGB/60LEDs	150
4040RGB/120LEDs.....	151
5050RGBW/60LEDs	152
5050RGBW/84LEDs	153
5050RGBW/96LEDs	154
5050RGBWW/60LEDs	155
5050RGBWW/96LEDs	157
5050RGB+2835CCT 72LEDs.....	158
5050RGB+2835CCT 90LEDs	159
5050RGB 60LED DMX512	160
5050RGB 70LED DMX512	161
5050RGB 80LED DMX512	162
5050RGBW 70LED DMX512	163
DMX512 RGB 60LED.....	164
DMX512 RGBW 80LED.....	165
DMX512 RGBW 72LED.....	166
SPI 5050 84LED RGB	167
SPI RGB 60LED	168
SPI RGBW 60LED.....	169
SPI RGB 60LED	170
SPI RGBW 60LED	171
SPI RGB 30LED	172
SPI RGB 60LED	173
SPI RGB 60LED	174
SPI RGB 84LED	175
SPI RGB 84LED	176
SPI RGB 84LED	177

MX 09
IP67 SILICON EXTRUSION

04*08mm(Side view)	186
06*12mm(Side view)	187
08*17mm(Side view).....	188
09*10mm(Top view)	189
13*12mm(Top view)	190
10*10mm(Top view)	191
12*12mm(Top view)	192
16*16mm(Side view)	193
3D 16*16mm(Top&Side view)	194
12*20mm(Side view)	196
12*25mm(Side view).....	197
15*14mm(Top view)	198
D22mm 360°	199
D25mm 360° (Side view)	200
2835SMD 70LED	203
2835SMD 80LED	204
2835SMD 126LED	205
2835SMD 140LED	206
2835SMD 168LED	207
0805 Silicon extrusion strip.....	208
COB 480LEDs	209
COB 512LEDs	210

WALL WASHER SERIES

LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes,including indoor and outdoor decorations.From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.

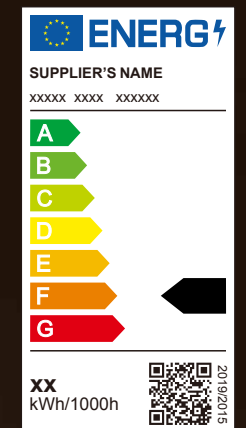

110lm/W



36° lighting
angle



2000CD




WARRANTY

WALL WASHER SERIES

2835SMD/126LED-STA


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF32LV126Q80-D027A6F10107N	126	24V	12	2700K	80	1,520	475	122	IP67	10mm
MF32LV126Q80-D030A6F10107N	126	24V	12	3000K	80	1,580	494	126	IP67	10mm
MF32LW126Q80-D040A6F10107N	126	24V	12	4000K	80	1,600	500	128	IP67	10mm
MF32LW126Q80-D065A6F10107N	126	24V	12	6500K	80	1,630	509	130	IP67	10mm
MF32LU168Q80-D801I6F10114N	126	24V	12	CCT	80	1,495	467	125	IP67	10mm

Optical parameter

LED Type:	2835 Lens LED
Color Rendering Index:	80
CCT Range:	2700K 3000K 4000K 6500K
Irritation Angle:	36°
Light Efficiency:	122~130Lm/w
Lumen Output/meter:	1495~1600Lm/m (467~500Lm/ft)
Enery Grade:	N/A

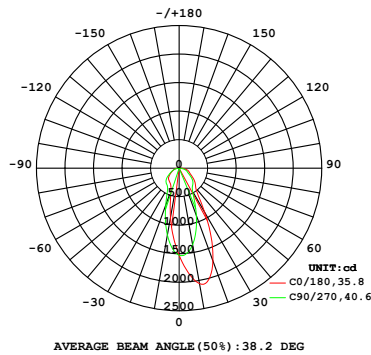

Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	126LEDs/m
Size of Section:	55.5mm(2.1'')
LEDs of Section	7 LEDs


Waterproof Rate



WALL WASHER SERIES

2835SMD/84LED-CV


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF32LW084A80-D040A1A10107N	84	24V	8	2700K	80	923	288	115	IP20	10mm
	84	24V	8	3000K	80	974	304	122	IP20	10mm
	84	24V	8	4000K	80	1,025	320	128	IP20	10mm
	84	24V	8	5000K	80	1,035	323	129	IP20	10mm
	84	24V	8	6500K	80	1,045	326	131	IP20	10mm

Optical parameter

LED Type:	2835Lens LED
Color Rendering Index:	80
CCT Range:	2700K 3000K 4000K 5000K 6500K
Irritation Angle:	36°
Light Efficiency:	115~131Lm/w
Lumen Output/meter:	923~1045Lm/m (288~326Lm/ft)
Enery Grade:	N/A

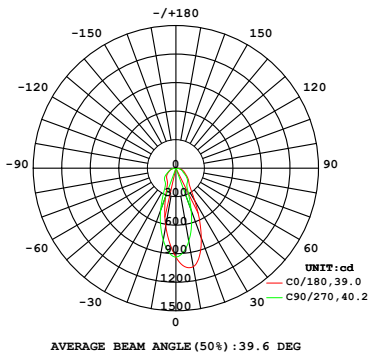

Electric parameter

Input Current/m:	0.33A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	8W/m (2.5W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	84LEDs/m
Size of Section:	83.3mm(3.27'')
LEDs of Section	7 LEDs


Waterproof Rate



WALL WASHER SERIES

● 2835SMD/112LED-CV


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF32LW112A80-D040A1F10108N	112	24V	9.6	4000K	80	1,275	398	133	IP20	10mm

Optical parameter

LED Type:	2835Lens LED
Color Rendering Index:	80
CCT Range:	4000K
Irritation Angle:	36°
Light Efficiency:	133Lm/w
Lumen Output/meter:	1275Lm/m (398Lm/ft)
Enery Grade:	N/A

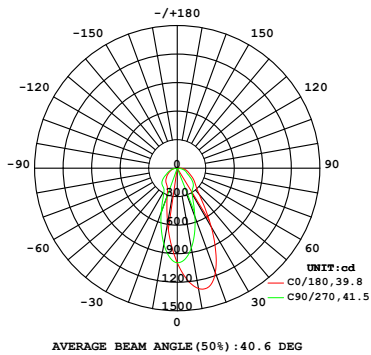

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	112LEDs/m
Size of Section:	71.4mm(2.8")
LEDs of Section	7 LEDs


Waterproof Rate



WALL WASHER SERIES

● 2835SMD/126LED-CV


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF32LW126A80-D040A1F10107N	126	24V	15	4000K	80	1,600	500	128	IP20	10mm

Optical parameter

LED Type:	2835 Lens LED
Color Rendering Index:	80
CCT Range:	4000K
Irritation Angle:	36°
Light Efficiency:	128Lm/w
Lumen Output/meter:	1600Lm/m (500Lm/ft)
Enery Grade:	N/A

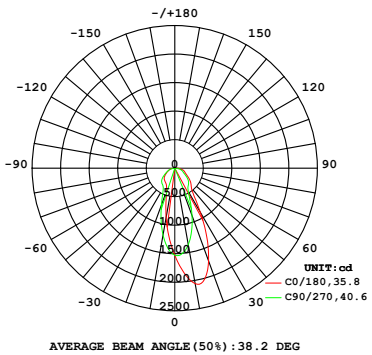

Electric parameter

Input Current/m:	0.62A/m (0.19A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.68W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	126LEDs/m
Size of Section:	55.5mm(2.18")
LEDs of Section	7 LEDs


Waterproof Rate



WALL WASHER SERIES

● 2835SMD/112LED
-PRO DMX


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MX32LW112Q80-D040K6F12107D	112	24V	15	4000K	80	1,700	531	113	IP20/IP67	12mm

Optical parameter

LED Type:	2835 Lens LED
Color Rendering Index:	80
CCT Range:	4000K
Irritation Angle:	36°
Light Efficiency:	113Lm/w
Lumen Output/meter:	1700Lm/m (53Lm/ft)
Enery Grade:	N/A

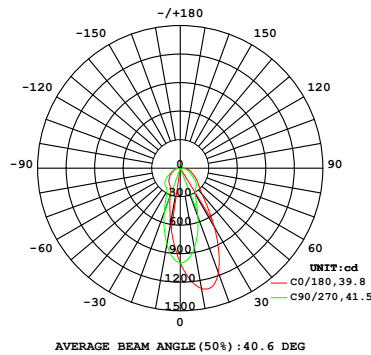

Electric parameter

Input Current/m:	0.62A/m (0.19A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.68W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	112LEDs/m
Size of Section:	250mm(9.8")
LEDs of Section	14 LEDs


Waterproof Rate



WALL WASHER SERIES

● 2835SMD/140LED
-PRO DMX CCT


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MX32LU140Q80-D801K6F12107D	140	24V	15	4000K	80	1,680	525	112	IP67	12mm

Optical parameter

LED Type:	2835 Lens LED
Color Rendering Index:	80
CCT Range:	4000K
Irritation Angle:	36°
Light Efficiency:	112Lm/w
Lumen Output/meter:	1680Lm/m (525Lm/ft)
Enery Grade:	N/A

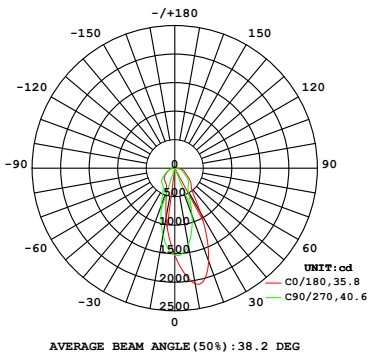

Electric parameter

Input Current/m:	0.62A/m (0.19A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.68W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	14 LEDs


Waterproof Rate



WALL WASHER SERIES

● 2835SMD/126LED-Pro


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF32LV126Q80-D027A6F12107N	126	24V	15	2700K	80	1,825	570	122	IP67	12mm
MF32LV126Q80-D030A6F12107N	126	24V	15	3000K	80	1,930	603	129	IP67	12mm
MF32LW126Q80-D040A6F12107N	126	24V	15	4000K	80	2,000	625	133	IP67	12mm
MF32LW126Q80-D065A6F12107N	126	24V	15	6500K	80	2,140	638	136	IP67	12mm

Optical parameter

LED Type:	2835 Lens LED
Color Rendering Index:	Ra>80
CCT Range:	2700K/3000K/4000K/6500K
Irritation Angle:	36°
Light Efficiency:	122~136Lm/w
Lumen Output/meter:	1825~2140Lm/m (570~668Lm/ft)
Energy Grade:	N/A

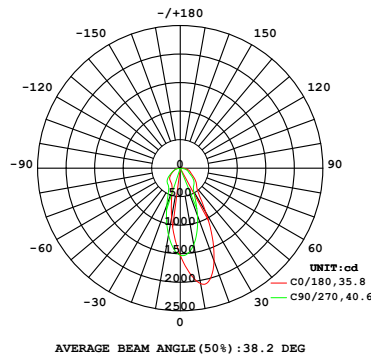

Electric parameter

Input Current/m:	0.625A/m (0.195A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.68W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	126LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	7 LEDs


Waterproof Rate



WALL WASHER SERIES

● 2835SMD/140LED-Pro CCT


- Adopt 36° beam angle LED polarized lens;
- Effectively improve the illuminance value,CD value can reach 2000CD;
- With constant current IC design, can support up to 10M without voltage drop;
- Can do white light, CCT, DMX white light different.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MX32LU140Q80-D801K6F12107D	168	24V	15	2700~6500K	80	1,690	528	113	IP67	12mm

Optical parameter

LED Type:	2835 Lens LED
Color Rendering Index:	80
CCT Range:	2700K~6500K
Irritation Angle:	36°
Light Efficiency:	113Lm/w
Lumen Output/meter:	1690Lm/m (528Lm/ft)
Energy Grade:	N/A

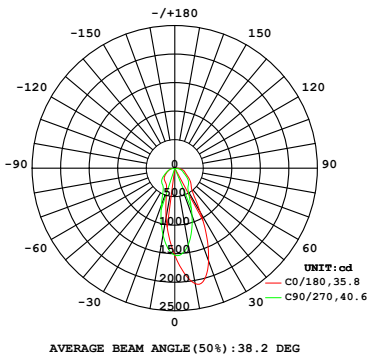

Electric parameter

Input Current/m:	0.625A/m (0.195A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.68W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	83.3mm(3.27")
LEDs of Section	14 LEDs

Waterproof Rate





CONNECTOR

Pro series 12mm PCB single color connectors



Power Cord
Connects light to power supply
IP65 DIY connector(indoor use)
Cable Length available in
0.3m min~20m Max.

Screwless Terminal DIY assembly
DC Plug(2 Pin) *1
Anti-tension Shell *1
PC Fixing Clip *1



Docking Connector
Combine two pieces of the lights
together IP65 DIY connector
(indoor use)

Seamless Docking,Screwless Terminal
Anti-tension Shell *1
Feed Connector (2 Pin) *1
PC Fixing Clip *2







L-Type Connector
Combine two pieces of the lights
together IP65 DIY connector
(indoor use)

Seamless Docking,Screwless Terminal
L-Type Anti-tension Shell *1
L-Type Feed Connector(2 Pin) *1
PC Fixing Clip *2



End Cap
Termination Protection of the light,
IP65 DIY connector(indoor use)

Seamless Terminal DIY assembly
Anti-tension Shell *1
PC Fixing Clip *1

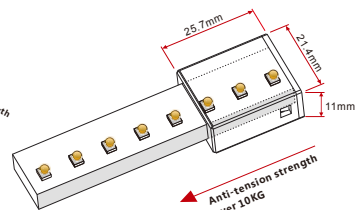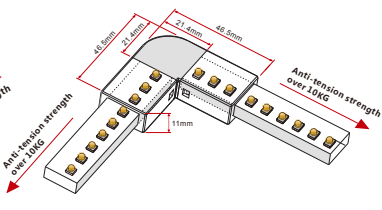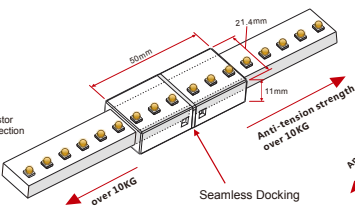

Clip



End cap



PVC profile

CV series 10mm PCB connectors




IP20 Quick connector
10mm PCB

WALL WASHER SERIES

● 3535SMD/24LED 10*60°


- Optional optic PMMA lens with beam angles in 25°, 30°, 45° and 60° for different kinds of project;
- Adopting reliable high-power 3535 LED;
- Original innovation and patent design with the title of PROTECH.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF355W024Q80-J040G6F22106N	24	24V	22	4000K	80	1,000	305	48	IP68	22mm

Optical parameter

LED Type:	SMD3535
Color Rendering Index:	80
CCT Range:	4000K
Irritation Angle:	10*60°
Light Efficiency:	48Lm/w
Lumen Output/meter:	1000Lm/m (305Lm/ft)
Enery Grade:	N/A

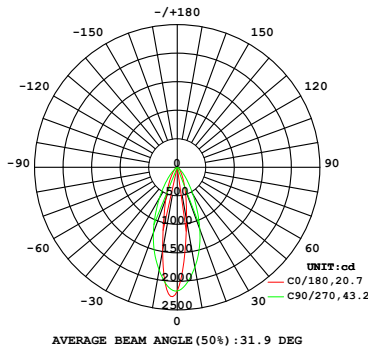

Electric parameter

Input Current/m:	0.91A/m (0.28A/ft)
Input Voltage:	DC24V
Power/M:	22W/m (6.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	24LEDs/m


Waterproof Rate



WALL WASHER SERIES

● 3535SMD/24LED 20*30°


- Optional optic PMMA lens with beam angles in 25°, 30°, 45° and 60° for different kinds of project;
- Adopting reliable high-power 3535 LED;
- Original innovation and patent design with the title of PROTECH.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF355W024Q80-J040G6F22106N	24	24V	22	4000K	80	1,280	390	60	IP68	22mm

Optical parameter

LED Type:	SMD3535
Color Rendering Index:	80
CCT Range:	4000K
Irritation Angle:	20*30°
Light Efficiency:	60Lm/w
Lumen Output/meter:	1280Lm/m (390Lm/ft)
Enery Grade:	N/A

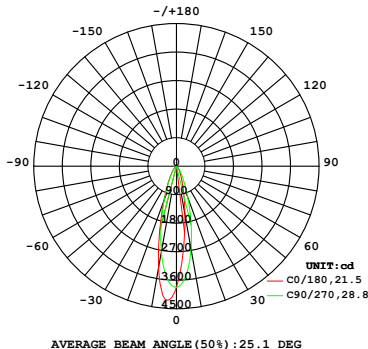


Electric parameter

Input Current/m:	0.91A/m (0.28A/ft)
Input Voltage:	DC24V
Power/M:	22W/m (6.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	24LEDs/m

Waterproof Rate




Accessory

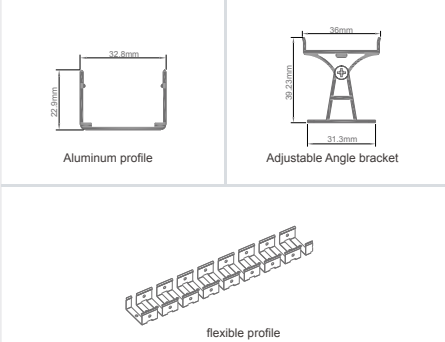

WALL WASHER SERIES

● 3535SMD/24LED 45°


- Optional optic PMMA lens with beam angles in 25°, 30°, 45° and 60° for different kinds of project;
- Adopting reliable high-power 3535 LED;
- Original innovation and patent design with the title of PROTECH.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF355W024Q80-J040G6F22106N	24	24V	22	4000K	80	1,200	366	55	IP68	22mm

Optical parameter

LED Type:	SMD3535
Color Rendering Index:	80
CCT Range:	4000K
Irritation Angle:	45°
Light Efficiency:	55Lm/w
Lumen Output/meter:	1200Lm/m (366Lm/ft)
Enery Grade:	N/A

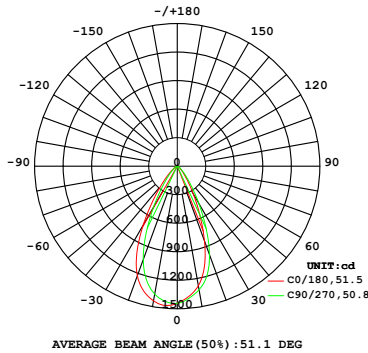


Electric parameter

Input Current/m:	0.91A/m (0.28A/ft)
Input Voltage:	DC24V
Power/M:	22W/m (6.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	24LEDs/m

Waterproof Rate




Accessory

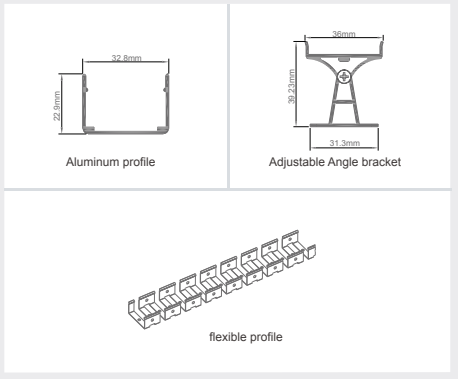

WALL WASHER SERIES

● 3535SMD/24LED 20*30° DMX RGBW


- Optional optic PMMA lens with beam angles in 25°, 30°, 45° and 60° for different kinds of project;
- R:620-630nm,G:515-525nm.B:5460-470nm,W:2700-6000K, we adopting reliable high-power 3535 LED;
- Original innovation and patent design with the title of PROTECH.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF355W024Q80-J040W6F22106X	24	24V	24	4000K	80	1,520	463	63	IP68	22mm
MF355Z024Q80-J040W6F22106X	24	24V	24	RGBW	80	900	274	38	IP68	22mm

Optical parameter

LED Type:	SMD3535
Color Rendering Index:	80
CCT Range:	4000K/RGBW
Irritation Angle:	20*30°
Light Efficiency:	63Lm/w
Lumen Output/meter:	1520Lm/m (475Lm/ft)
Enery Grade:	N/A

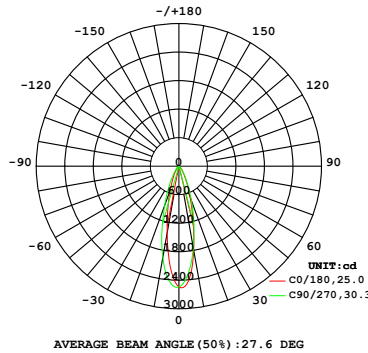


Electric parameter

Input Current/m:	1A/m (0.31A/ft)
Input Voltage:	DC24V
Power/M:	24W/m (6.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	24LEDs/m

Waterproof Rate




Accessory

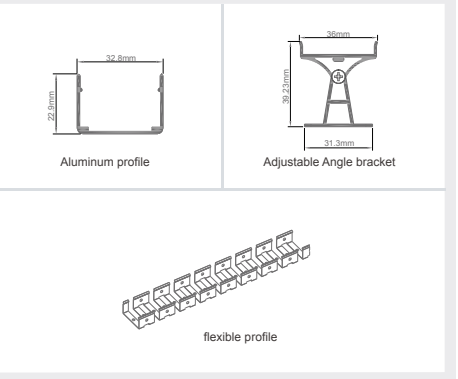

WALL WASHER SERIES

3535SMD/24LED 45° DMX RGBW


- Optional optic PMMA lens with beam angles in 25°, 30°, 45° and 60° for different kinds of project;
- R:620-630nm,G:515-525nm,B:5460-470nm,W:2700-6000K, we adopting reliable high-power 3535 LED;
- Original innovation and patent design with the title of PROTECH.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF355W024Q80-J040W6F22106X	24	24V	24	4000K	80	1,400	427	58	IP68	22mm
MF355Z024Q80-J040W6F22106X	24	24V	24	RGBW	80	780	238	33	IP68	22mm

Optical parameter


LED Type:	SMD3535
Color Rendering Index:	80
CCT Range:	4000K/RGBW
Irritation Angle:	45°
Light Efficiency:	58Lm/w
Lumen Output/meter:	1400Lm/m (427Lm/ft)
Enery Grade:	N/A

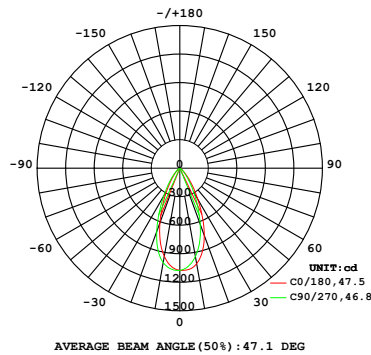

Electric parameter

Input Current/m:	1A/m (0.31A/ft)
Input Voltage:	DC24V
Power/M:	24W/m (6.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	24LEDs/m

Accessory

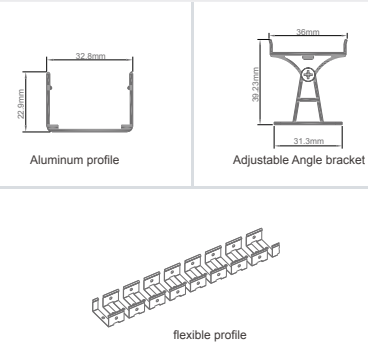


Waterproof Rate



WALL WASHER SERIES

3535SMD/24LED 10*60° DMX RGBW


- Optional optic PMMA lens with beam angles in 25°, 30°, 45° and 60° for different kinds of project;
- R:620-630nm,G:515-525nm,B:5460-470nm,W:2700-6000K, we adopting reliable high-power 3535 LED;
- Original innovation and patent design with the title of PROTECH.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF355W024Q80-J040W6F22106X	24	24V	24	4000K	80	1,152	351	48	IP68	22mm
MF355Z024Q80-J040W6F22106X	24	24V	24	RGBW	N/A	680	207	28	IP68	22mm

Optical parameter


LED Type:	SMD3535
Color Rendering Index:	80
CCT Range:	4000K/RGBW
Irritation Angle:	10*60°
Light Efficiency:	48Lm/w
Lumen Output/meter:	1152Lm/m (351Lm/ft)
Enery Grade:	N/A

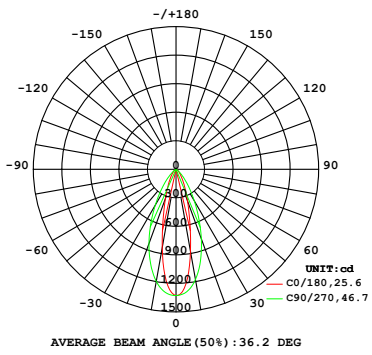

Electric parameter

Input Current/m:	1A/m (0.31A/ft)
Input Voltage:	DC24V
Power/M:	24W/m (7.5W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	24LEDs/m

Accessory

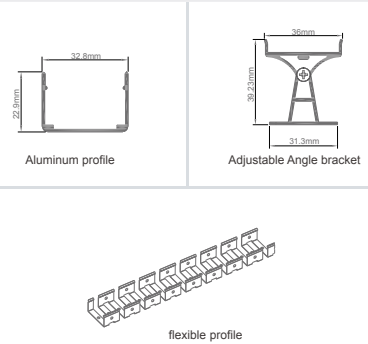


Waterproof Rate



WALL WASHER SERIES

● 5050 SMD/60LED RGB


- Using a 45° beam Angle 5050 lens RGB LED lamp bead. Effectively improve the illumination value;
- Resistant to flame retardant and UV,have RGB/SPI/DMX WHITE version;
- Higher light utilization efficiency, higher center illumination.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF35LA060Q00-D000J6F10106N	20	24V	5	Red	N/A	139	46	28	IP65	10mm
	20	24V	5	Green	N/A	410	137	82	IP65	10mm
	20	24V	5	Blue	N/A	98	33	20	IP65	10mm
	60	24V	15	RGB	N/A	620	207	42	IP65	10mm

Optical parameter

LED Type:	SMD 5050 Lens LED
Color Rendering Index:	N/A
CCT Range:	RGB
Irritation Angle:	45°
Light Efficiency:	28~82Lm/w
Lumen Output/meter:	98~620Lm/m (33~207Lm/ft)
Energy Grade:	N/A

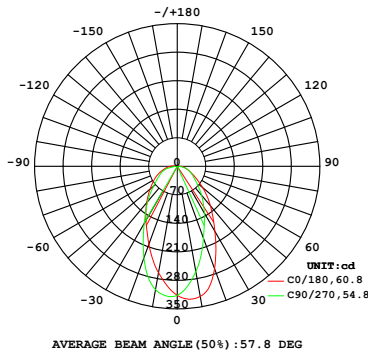


Electric parameter

Input Current/m:	0.625A/m (0.195A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.68W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	6 LEDs

Waterproof Rate



Recommended Profiles

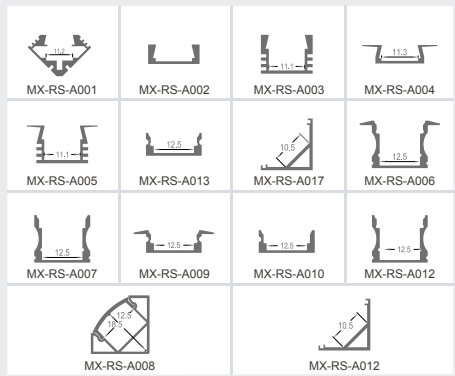

LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes, including indoor and outdoor decorations. From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting settings for shops, hotels, exhibitions and supermarkets.






CSP SERIES

● CSP CCT 640LED

- Zero light spot, uniform light;
- Flip chips;CSP encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.




NEW



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF309U640A90-D80111A10132N	320	24V	9.5	2700K	80	850	266	89	IP20	10mm
	640	24V	19	4000K	80	1,750	547	92	IP20	10mm
	320	24V	9.5	6000K	80	960	281	95	IP20	10mm

Optical parameter

LED Type:	CSP 640LED
Color Rendering Index:	Ra > 80
CCT Range:	2700K~6000K(CCT Turnable)
Irritation Angle:	140°
Light Efficiency:	89~95Lm/w
Lumen Output/meter:	850~1750Lm/m (266~281Lm/ft)
Energy Grade:	F

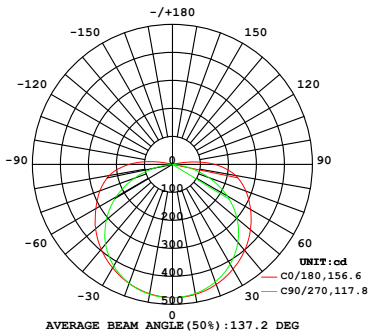


Electric parameter

Input Current/m:	0.79A/m (0.24A/ft)
Input Voltage:	DC24V
Power/M:	19W/m (5.93W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	640LEDs/m
Size of Section:	50mm(1.97 inch)
LEDs of Section	24 LEDs

Waterproof Rate




Recommended Profiles

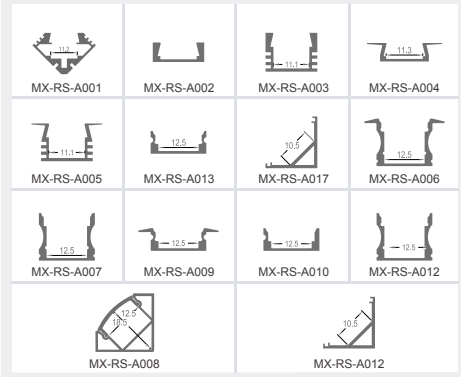

CSP RGB 840LED


- Zero light spot, uniform light;
- Flip chips;CSP encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF304A840A00-D000J1A10142N	280	24V	5	Red (620~630)	N/A	100	20	15	IP20	10mm
	280	24V	4	Green (515~525)	N/A	240	60	91	IP20	10mm
	280	24V	4	Blue (460~470)	N/A	50	12	13	IP20	10mm
	840	24V	13	RGB	N/A	360	30	48	IP20	10mm

Optical parameter

LED Type:	CSP 840LED
Color Rendering Index:	N/A
CCT Range:	RGB
Irritation Angle:	140°
Light Efficiency:	13~91Lm/w
Lumen Output/meter:	50~360Lm/m (15~113Lm/ft)
Enery Grade:	N/A

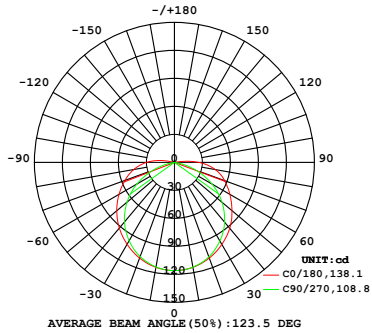

Electric parameter


Input Current/m:	0.54A/m (0.16A/ft)
Input Voltage:	DC24V
Power/M:	13W/m (4.06W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	840LEDs/m
Size of Section:	50mm(1.97'')
LEDs of Section	42 LEDs

Waterproof Rate



CSP RGBW 840LED


- Zero light spot, uniform light;
- Flip chips;CSP encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF304Z840A90-D027K1AF12128N	210	24V	5	Red	N/A	120	38	24	IP20	12mm
	210	24V	5	Green	N/A	250	78	50	IP20	12mm
	210	24V	5	Blue	N/A	60	19	12	IP20	12mm
	210	24V	5	4000K	80	430	134	86	IP20	12mm
	840	24V	20	RGBW	N/A	860	269	43	IP20	12mm

Optical parameter

LED Type:	CSP 840LED
Color Rendering Index:	Ra > 80(2700K)
CCT Range:	RGBW
Irritation Angle:	140°
Light Efficiency:	12~86Lm/w
Lumen Output/meter:	120~860Lm/m (38~269Lm/ft)
Enery Grade:	N/A

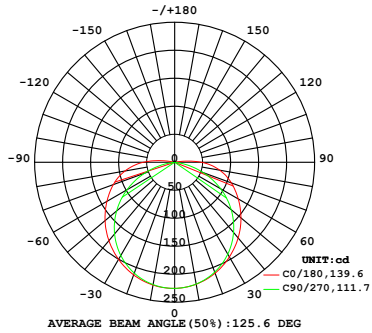

Electric parameter



Input Current/m:	0.83A/m (0.25A/ft)
Input Voltage:	DC24V
Power/M:	20W/m (6W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	840LEDs/m
Size of Section:	33mm(1.3'')
LEDs of Section	28 LEDs

Waterproof Rate



COB SERIES

LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes, including indoor and outdoor decorations. From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.

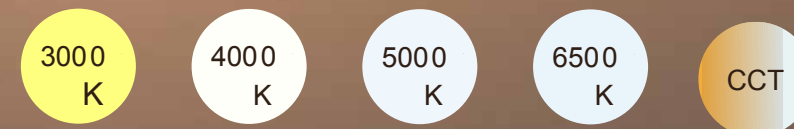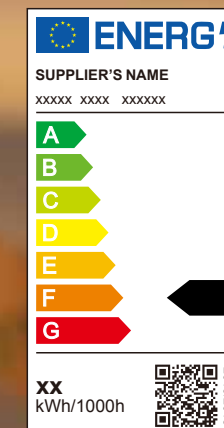

COB SERIES


Double color temperature

Can be adjusted to the light suitable for the environment according to customer needs, according to different scenes, different people's needs, also can meet the needs of various color temperature



COB 280LED


- Zero light spot, uniform light;
- Flip chips;COB encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF309V280A90-D027A1A10114N	280	24V	8	2700K	90	702	219	88	IP20	10mm
MF309V280A90-D030A1A10114N	280	24V	8	3000K	90	740	232	93	IP20	10mm
MF309W280A90-D040A1A10114N	280	24V	8	4000K	90	780	244	98	IP20	10mm
MF309W280A90-D050A1A10114N	280	24V	8	5000K	90	780	244	98	IP20	10mm
MF309W280A90-D060A1A10114N	280	24V	8	6000K	90	780	244	98	IP20	10mm

Optical parameter

LED Type:	COB 280LED
Color Rendering Index:	Ra > 90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	180°
Light Efficiency:	88~98Lm/w
Lumen Output/meter:	702~780Lm/m (219~243Lm/ft)
Energy Grade:	F

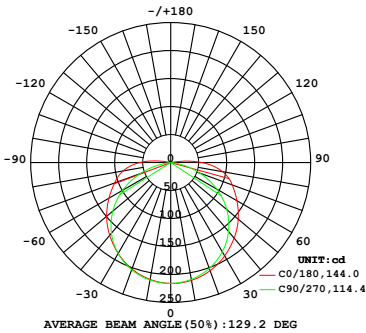


Electric parameter

Input Current/m:	0.33A/m (0.1A/ft)
Input Voltage:	DC24V
Power/M:	8W/m (2.43W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	280LEDs/m
Size of Section:	50mm(1.97\")
LEDs of Section	14 LEDs

Waterproof Rate




Recommended Profiles

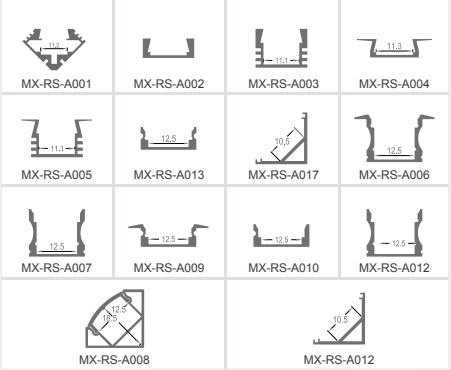

COB SERIES

COB 320LED


- Zero light spot, uniform light;
- Flip chips;COB encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF309V320A90-D027A1A10216N	320	24V	8	2700K	90	690	216	86	IP20	10mm
MF309V320A90-D030A1A10216N	320	24V	8	3000K	90	730	228	91	IP20	10mm
MF309W320A90-D040A1A10216N	320	24V	8	4000K	90	760	238	95	IP20	10mm
MF309W320A90-D050A1A10216N	320	24V	8	5000K	90	760	238	95	IP20	10mm
MF309W320A90-D060A1A10216N	320	24V	8	6000K	90	760	238	95	IP20	10mm

Optical parameter

LED Type:	COB 320LED
Color Rendering Index:	Ra > 90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	180°
Light Efficiency:	86~95Lm/w
Lumen Output/meter:	690~760Lm/m (216~238Lm/ft)
Enery Grade:	F

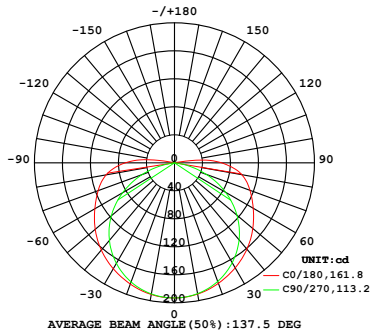

Electric parameter

Input Current/m:	0.33A/m (0.1A/ft)
Input Voltage:	DC24V
Power/M:	8W/m (2.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	320LEDs/m
Size of Section:	50mm(1.97'')
LEDs of Section	16 LEDs


Waterproof Rate



COB SERIES

COB 420LED


- Zero light spot, uniform light;
- Flip chips;COB encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF309V420A90-D027A1A10221N	420	24V	12	2700K	90	1,026	321	86	IP20	10mm
MF309V420A90-D030A1A10221N	420	24V	12	3000K	90	1,083	338	96	IP20	10mm
MF309W420A90-D040A1A10221N	420	24V	12	4000K	100	1,140	356	95	IP20	10mm
MF309W420A90-D050A1A10221N	420	24V	12	5000K	100	1,140	356	95	IP20	10mm
MF309W420A90-D060A1A10221N	420	24V	12	6000K	100	1,140	356	95	IP20	10mm

Optical parameter

LED Type:	COB 420LED
Color Rendering Index:	Ra > 90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	180°
Light Efficiency:	86~95Lm/w
Lumen Output/meter:	1026~1140Lm/m (321~356Lm/ft)
Enery Grade:	F

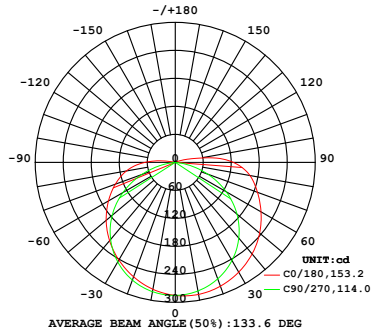

Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.65W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	420LEDs/m
Size of Section:	50mm(1.97'')
LEDs of Section	21 LEDs


Waterproof Rate



COB SERIES

COB 480LED


- Zero light spot, uniform light;
- Flip chips;COB encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF309V480A90-D027A1A10124N	480	24V	12	2700K	90	1,080	329	90	IP20	10mm
MF309V480A90-D030A1A10124N	480	24V	12	3000K	90	1,140	356	95	IP20	10mm
MF309W480A90-D040A1A10124N	480	24V	12	4000K	90	1,200	365	100	IP20	10mm
MF309W480A90-D050A1A10124N	480	24V	12	5000K	90	1,200	365	100	IP20	10mm
MF309W480A90-D060A1A10124N	480	24V	12	6000K	90	1,200	365	100	IP20	10mm

Optical parameter

LED Type:	COB 480LED
Color Rendering Index:	Ra > 90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	180°
Light Efficiency:	90~100Lm/w
Lumen Output/meter:	1080~1200Lm/m (329~365Lm/ft)
Energy Grade:	F

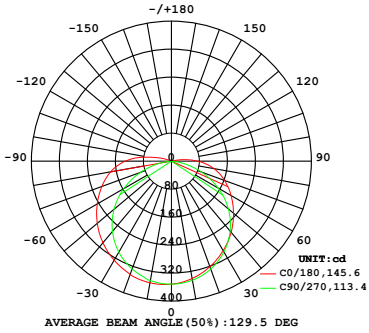

Electric parameter

Input Current/m:	0.50A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.7W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	480LEDs/m
Size of Section:	50mm(1.97'')
LEDs of Section	24 LEDs


Waterproof Rate



COB SERIES

COB 512LED


- Zero light spot, uniform light;
- Flip chips;COB encapsulation technology without wire bonding;
- Flip chips has bigger pole for high current & work more stable;
- Ta:-25~40℃; Tc: 75℃ (max)
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF309V512A90-D027A1A10132N	512	24V	12	2700K	90	1,080	329	90	IP20	10mm
MF309V512A90-D030A1A10132N	512	24V	12	3000K	90	1,140	356	90	IP20	10mm
MF309W512A90-D040A1A10132N	512	24V	12	4000K	90	1,200	365	100	IP20	10mm
MF309W512A90-D050A1A10132N	512	24V	12	5000K	90	1,200	365	100	IP20	10mm
MF309W512A90-D060A1A10132N	512	24V	12	6000K	90	1,200	365	100	IP20	10mm

Optical parameter

LED Type:	COB 512LED
Color Rendering Index:	Ra > 90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	180°
Light Efficiency:	90~100Lm/w
Lumen Output/meter:	1080~1200Lm/m (329~365Lm/ft)
Energy Grade:	F

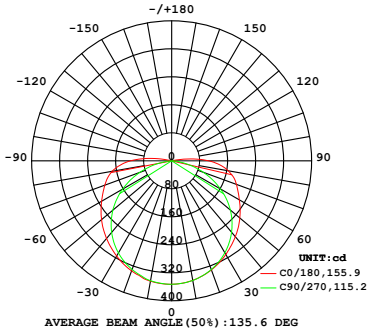


Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.65W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	512LEDs/m
Size of Section:	62.5mm(2.46'')
LEDs of Section	32 LEDs

Waterproof Rate



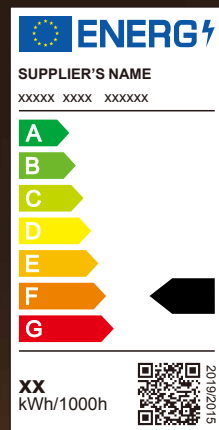

HIGH VOLTAGE FLEX

LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes,including indoor and outdoor decorations.From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.

- 
AC 120V INPUT
- 
AC 230V INPUT
- 
DALI DT6/DT8
- 
FLICKER -FREE
- 
Bending Diameter
- 
Flame Resistant
- 
UV Resistant



HIGH VOLTAGE FLEX

● CCT Tunable DALI DT8

- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- CCT Tunable;25m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft		CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF728V120P80-D027G6A12112D	120	AC220V	10	3.1	2700K	80	1,050	328	105	IP65	15*6mm	>0.9
MF728W120P80-D065G6A12112D	120	AC220V	10	3.1	6500K	80	1,150	359	115	IP65	15*6mm	>0.9



Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra>80/90
CCT Range:	2700~6500K Tunable
Irritation Angle:	120°
Light Efficiency:	105~115Lm/w
Lumen Output/meter:	1050~1150Lm/m (328~359Lm/ft)
Energy Grade:	F


Electric parameter

Input Current/m:	0.08A/m (0.024A/ft)
Input Voltage:	AC220~230V(Dali DT8 Driver)
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	12 LEDs


Waterproof Rate

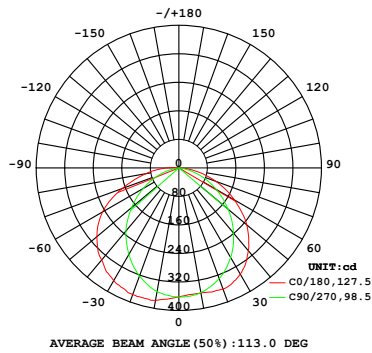

Accessory




2.PC Channel



HIGH VOLTAGE FLEX

Single color DALI DT6


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- DALI Dimable;25m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF728V120P80-D027G6A12112C	120	AC230V	10 3.1	2700K	80	1,100	365	110	IP65	15*6mm	>0.9
MF728V120P80-D030G6A12112C	120	AC230V	10 3.1	3000K	80	1,140	365	114	IP65	15*6mm	>0.9
MF728W120P80-D040G6A12112C	120	AC230V	10 3.1	4000K	80	1,200	402	120	IP65	15*6mm	>0.9
MF728W120P80-D050G6A12112C	120	AC230V	10 3.1	5000K	80	1,200	402	120	IP65	15*6mm	>0.9
MF728W120P80-D060G6A12112C	120	AC230V	10 3.1	6000K	80	1,200	402	120	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~120Lm/w
Lumen Output/meter:	1100~1200Lm/m (365~402Lm/ft)
Enery Grade:	F

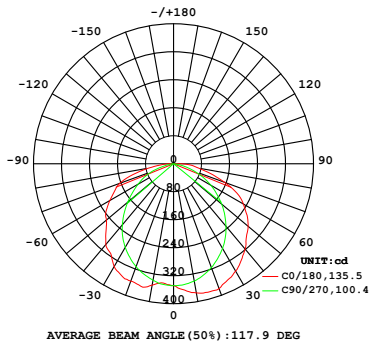


Electric parameter

Input Current/m:	0.04A/m (0.012A/ft)
Input Voltage:	AC220~230V(Dali DT6 Driver)
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	12 LEDs


Waterproof Rate



Accessory




2.PC Channel



HIGH VOLTAGE FLEX

0-10V Dimming


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- Dimmable;25m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF728U120P80-D801G6A12112D	120	AC220V	10 3	2700K	80	1,100	344	110	IP65	15*6mm	>0.9
MF728U120P80-D801G6A12112D	120	AC220V	10 3	3000K	80	1,140	356	114	IP65	15*6mm	>0.9
MF728U120P80-D801G6A12112D	120	AC220V	10 3	4000K	80	1,200	375	120	IP65	15*6mm	>0.9
MF728U120P80-D801G6A12112D	120	AC220V	10 3	5000K	80	1,200	375	120	IP65	15*6mm	>0.9
MF728U120P80-D801G6A12112D	120	AC220V	10 3	6000K	80	1,200	375	120	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	110~120Lm/w 98~108Lm/w
Lumen Output/meter:	1100~1200Lm/m (344~375Lm/ft)
Enery Grade:	F

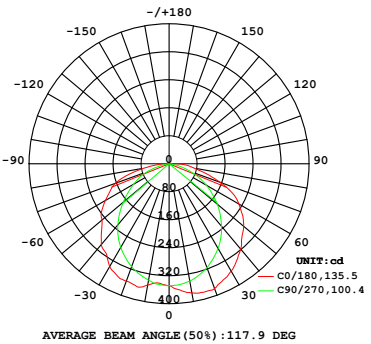


Electric parameter

Input Current/m:	0.04A/m (0.012A/ft)
Input Voltage:	AC220~230V(0~10V Driver)
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	12 LEDs


Waterproof Rate



Accessory




2.PC Channel



HIGH VOLTAGE FLEX

120V 2835SMD/120LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- Dimmable;50m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF528V120P80-D027G6A12112N	120	AC120V	12 3.65	2700K	80	1,188	362	100	IP65	15*6mm	>0.9
MF528V120P80-D030G6A12112N	120	AC120V	12 3.65	3000K	80	1,254	382	105	IP65	15*6mm	>0.9
MF528W120P80-D040G6A12112N	120	AC120V	12 3.65	4000K	80	1,320	402	110	IP65	15*6mm	>0.9
MF528W120P80-D050G6A12112N	120	AC120V	12 3.65	5000K	80	1,320	402	110	IP65	15*6mm	>0.9
MF528W120P80-D060G6A12112N	120	AC120V	12 3.65	6000K	80	1,320	402	110	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	1188~1320Lm/m (362~402Lm/ft)
Energy Grade:	F

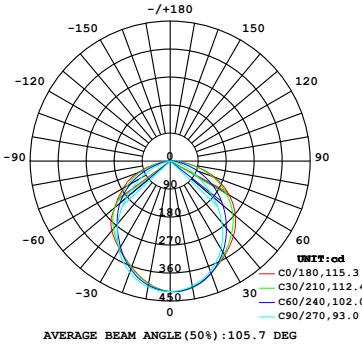


Electric parameter

Input Current/m:	0.1A/m (0.03A/ft)
Input Voltage:	AC120V
Power/M:	12W/m (3.65W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	12 LEDs


Waterproof Rate



Accessory




2.PC Channel



HIGH VOLTAGE FLEX

120V 2835SMD/60LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- Dimmable;50m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF528V060P80-D027G6A12106N	60	AC120V	10 3	2700K	80	1,000	304	100	IP65	15*6mm	>0.9
MF528V060P80-D030G6A12106N	60	AC120V	10 3	3000K	80	1,045	319	105	IP65	15*6mm	>0.9
MF528W060P80-D040G6A12106N	60	AC120V	10 3	4000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF528W060P80-D050G6A12106N	60	AC120V	10 3	5000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF528W060P80-D060G6A12106N	60	AC120V	10 3	6000K	80	1,100	335	110	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	1000~1100Lm/m (304~335Lm/ft)
Energy Grade:	F

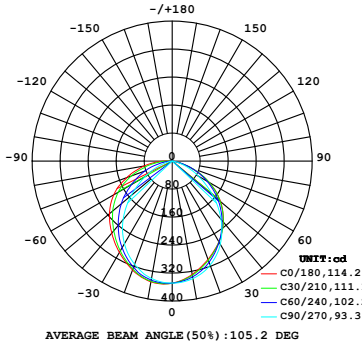


Electric parameter

Input Current/m:	0.08A/m (0.024A/ft)
Input Voltage:	AC120V
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	6 LEDs


Waterproof Rate



Accessory




2.PC Channel



HIGH VOLTAGE FLEX

120V 2835SMD/72LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- Dimmable;50m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF528V072P80-D027G6A12136N	72	AC120V	10 3	2700K	80	1,000	304	100	IP65	15*6mm	>0.9
MF528V072P80-D030G6A12136N	72	AC120V	10 3	3000K	80	1,045	319	105	IP65	15*6mm	>0.9
MF528W072P80-D040G6A12136N	72	AC120V	10 3	4000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF528W072P80-D050G6A12136N	72	AC120V	10 3	5000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF528W072P80-D060G6A12136N	72	AC120V	10 3	6000K	80	1,100	335	110	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	1000~1100Lm/m (304~335Lm/ft)
Enery Grade:	F

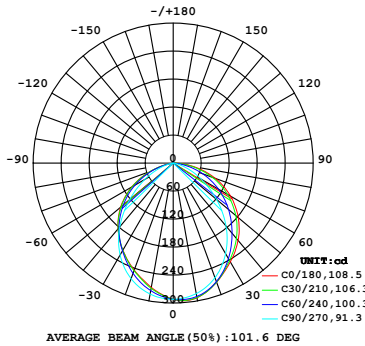


Electric parameter

Input Current/m:	0.08A/m (0.02A/ft)
Input Voltage:	AC120V
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	72LEDs/m
Size of Section:	500mm(19.7'')
LEDs of Section	36 LEDs


Waterproof Rate



Accessory




2.PC Channel



HIGH VOLTAGE FLEX

230V 2835SMD/72LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- Dimmable;50m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF728V072P80-D027G6A12106N	72	AC230V	10 3	2700K	80	1,000	304	100	IP65	15*6mm	>0.9
MF728V072P80-D030G6A12136N	72	AC230V	10 3	3000K	80	1,045	319	105	IP65	15*6mm	>0.9
MF728W072P80-D040G6A12136N	72	AC230V	10 3	4000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF728W072P80-D050G6A12136N	72	AC230V	10 3	5000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF728W072P80-D060G6A12136N	72	AC230V	10 3	6000K	80	1,100	335	110	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	1000~1100Lm/m (304~335Lm/ft)
Enery Grade:	F

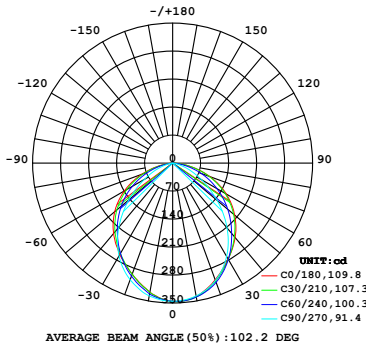


Electric parameter

Input Current/m:	0.04A/m (0.012A/ft)
Input Voltage:	AC230V
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	72LEDs/m
Size of Section:	500mm(19.7'')
LEDs of Section	36 LEDs


Waterproof Rate



Accessory



2.PC Channel




HIGH VOLTAGE FLEX

HIGH VOLTAGE FLEX

230V 2835SMD/60LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- Dimmable;50m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF728V060P80-D027G6A12106N	60	AC230V	10 3	2700K	80	1,000	304	100	IP65	15*6mm	>0.9
MF728V060P80-D030G6A12106N	60	AC230V	10 3	3000K	80	1,045	319	105	IP65	15*6mm	>0.9
MF728W060P80-D040G6A12106N	60	AC230V	10 3	4000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF728W060P80-D050G6A12106N	60	AC230V	10 3	5000K	80	1,100	335	110	IP65	15*6mm	>0.9
MF728W060P80-D060G6A12106N	60	AC230V	10 3	6000K	80	1,100	335	110	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	1000~1100Lm/m (304~335Lm/ft)
Energy Grade:	F

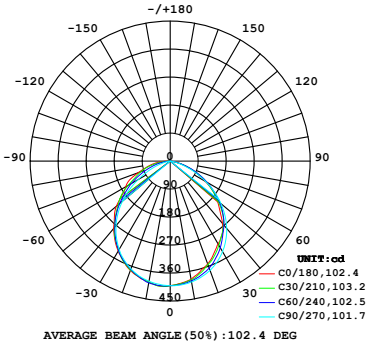


Electric parameter

Input Current/m:	0.043A/m (0.013A/ft)
Input Voltage:	AC220V~230V
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	6 LEDs


Waterproof Rate



Accessory




2.PC Channel



HIGH VOLTAGE FLEX

230V 2835SMD/120LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- Clip Or Channel for installation;
- Dimmable;50m/roll;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m Watt/ft	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Dimension	PF
MF728V120P80-D027G6A12112N	120	AC230V	12 3.65	2700K	80	1,188	362	100	IP65	15*6mm	>0.9
MF728V120P80-D030G6A12112N	120	AC230V	12 3.65	3000K	80	1,284	382	105	IP65	15*6mm	>0.9
MF728W120P80-D040G6A12112N	120	AC230V	12 3.65	4000K	80	1,320	402	110	IP65	15*6mm	>0.9
MF728W120P80-D050G6A12112N	120	AC230V	12 3.65	5000K	80	1,320	402	110	IP65	15*6mm	>0.9
MF728W120P80-D060G6A12112N	120	AC230V	12 3.65	6000K	80	1,320	402	110	IP65	15*6mm	>0.9

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra > 80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	1188~1320Lm/m (362~402Lm/ft)
Energy Grade:	F

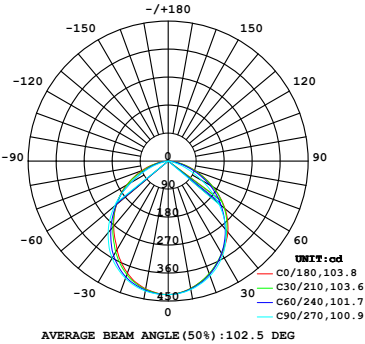


Electric parameter

Input Current/m:	0.052A/m (0.016A/ft)
Input Voltage:	AC230V
Power/M:	12W/m (3.65W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	12 LEDs


Waterproof Rate



Accessory






2.PC Channel



HIGH VOLTAGE FLEX





Accessory

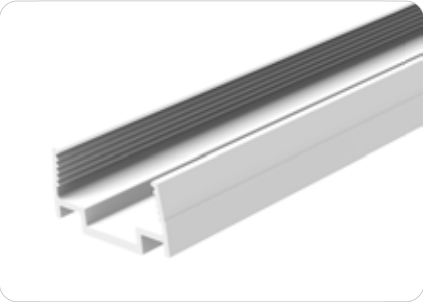

Code	W*H(ft)	Profile Length(mm)	Hole Size (mm)	Hole Number
MX-N1788	17*8.8mm	1000mm	Φ0.3mm	3

- Notes:**
- Profiles's raw material is aluminium.
 - Any customized Length available too, such as 500mm,1000mm,ect.
 - Installation referece to the user manual.

Plastic Mounting Clip

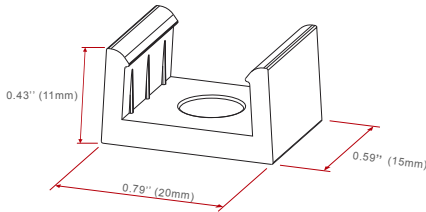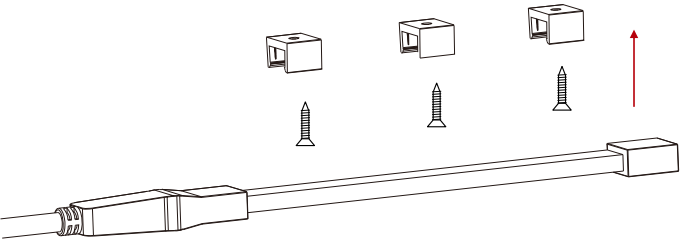


- Notes:**
- Mounting Clip's raw material is PC, and transparent/white/black/red paint available;
 - Each 1ft length with 1 Mounting Clip + 1 screw, and installation referece to the user manual;

HIGH VOLTAGE FLEX


Image	Product Code	IP Rate	Description
	MX-PJ-01726	IP20	Inline connectors; Fireproof materials-V0; Join two high voltage strips together
	MX-PJ-01727	IP20	L connector; Fireproof materials-V0; Using for cornners
	MX-PJ-01723	IP20	AC power plug 220~230V,50~60Hz ; Fireproof materials-V0; Cable length 1.5meters
	MX-PJ-01728	IP65	AC power plug 220~230V,50~60Hz ; Fireproof materials-V0; Cable length 1.5meters; Injection tooling;
	MX-PJ-01725	IP20	End cap; Fireproof materials-V0; To seal the end;

- Note:**
- The ouput lumen is based on 4000K color temperature. For 2700K,3000K color temperature is about 3-8% lower.
 - Standard length is 50M/roll, packing in reel and outerbox. If need customized length, price need to be revised.
 - For the accesories, used when you need to cut the strips,but when you cut it and reconnected ,it is IP20.
 - If order value is lower than 5000USD, price is based on EXW price.
 - Leading time:12-14days after confirmed order.

Cut-view when used with
H2-TRACK-3 or H2-CHAN-3
(sold separately)

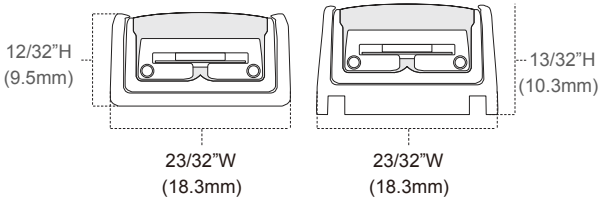


DO NOT TWIST, HANG VERTICALLY, SUSPEND UNSUPPORTED IN THE MIDDLE, OR BEND ALONG SHORT SIDE

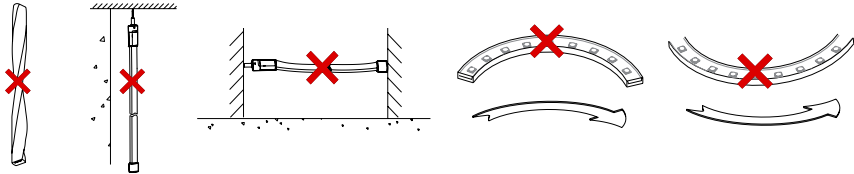



05 PRO LED FLEX

LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes,including indoor and outdoor decorations.From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.

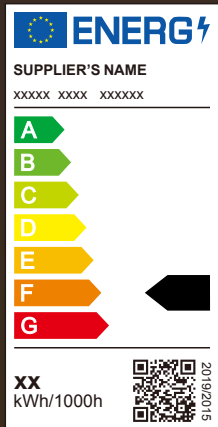

3000
K

4000
K

5000
K

6500
K

200
Lm/w

Ultra long




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/90LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V090A80-D027A1A10109N	90	24V	4.8	2700K	80 90	894 804	279 251	186 167	IP20	10mm
MF328V090A80-D030A1A10109N	90	24V	4.8	3000K	80 90	925 835	289 281	193 174	IP20	10mm
MF328W090A80-D040A1A10109N	90	24V	4.8	4000K	80 90	972 878	303 274	200 183	IP20	10mm
MF328W090A80-D050A1A10109N	90	24V	4.8	5000K	80 90	972 878	303 274	200 183	IP20	10mm
MF328W090A80-D060A1A10109N	90	24V	4.8	6000K	80 90	972 878	303 274	200 183	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	167~200Lm/w
Lumen Output/meter:	804~972Lm/m (251~303Lm/ft)
Enery Grade:	C

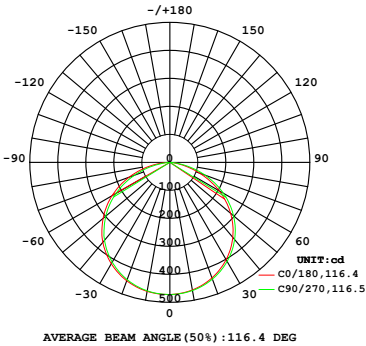


Electric parameter

Input Current/m:	0.2A/m (0.061A/ft)
Input Voltage:	DC24V
Power/M:	4.8W/m (1.5W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	90LEDs/m
Size of Section:	100mm(3.94 inch)
LEDs of Section	9 LEDs

Waterproof Rate



Recommended Profiles

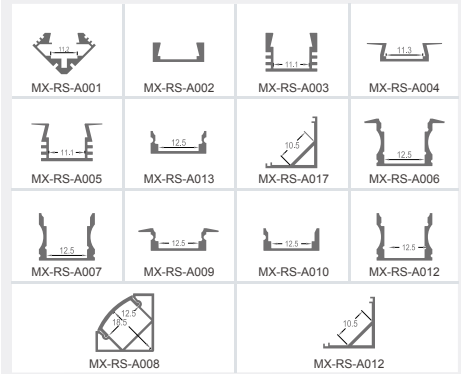


PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/126LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V126A80-D027A1A10109N	126	24V	7.2	2700K	80/90	1,255/1,150	392/359	174/160	IP20	10mm
MF328V126A80-D030A1A10109N	126	24V	7.2	3000K	80/90	1,295/1,190	403/372	180/165	IP20	10mm
MF328W126A80-D040A1A10109N	126	24V	7.2	4000K	80/90	1,425/1,311	445/410	198/182	IP20	10mm
MF328W126A80-D050A1A10109N	126	24V	7.2	5000K	80/90	1,425/1,311	445/410	199/183	IP20	10mm
MF328W126A80-D060A1A10109N	126	24V	7.2	6000K	80/90	1,425/1,311	445/410	199/183	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	160~199Lm/w
Lumen Output/meter:	1150~1425Lm/m (359~445Lm/ft)
Energy Grade:	C

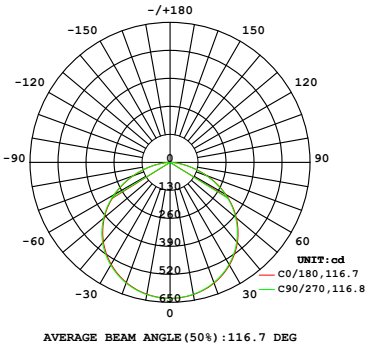

Electric parameter

Input Current/m:	0.3A/m (0.09A/ft)
Input Voltage:	DC24V
Power/M:	7.2W/m (2.2W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	126LEDs/m
Size of Section:	71.4mm(2.8")
LEDs of Section	9 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/180LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V180A80-D027A1A10109N	180	24V	9.6	2700K	80/90	1,780/1,610	556/503	185/168	IP20	10mm
MF328V180A80-D030A1A10109N	180	24V	9.6	3000K	80/90	1,850/1,640	578/515	192/170	IP20	10mm
MF328W180A80-D040A1A10109N	180	24V	9.6	4000K	80/90	1,920/1,766	600/551	200/172	IP20	10mm
MF328W180A80-D050A1A10109N	180	24V	9.6	5000K	80/90	1,920/1,766	600/551	200/172	IP20	10mm
MF328W180A80-D060A1A10109N	180	24V	9.6	6000K	80/90	1,920/1,766	600/551	200/172	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	168~200Lm/w
Lumen Output/meter:	1920~1945Lm/m (503~600Lm/ft)
Energy Grade:	C

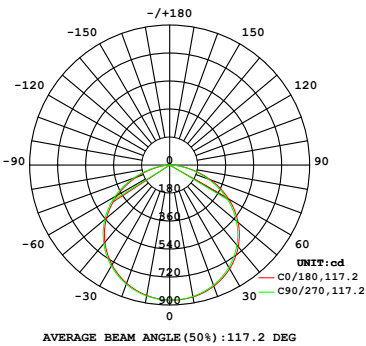

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (1.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	180LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	9 LEDs

Waterproof Rate



Recommended Profiles			
MX-RS-A001	MX-RS-A002	MX-RS-A003	MX-RS-A004
MX-RS-A005	MX-RS-A013	MX-RS-A017	MX-RS-A006
MX-RS-A007	MX-RS-A009	MX-RS-A010	MX-RS-A012
MX-RS-A008	MX-RS-A012		




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/234LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V234A80-D027A1A10109N	234	24V	12.4	2700K	80 90	2,290 2,065	715 645	184 167	IP20	10mm
MF328V234A80-D030A1A10109N	234	24V	12.4	3000K	80 90	2,340 2,110	731 659	188 170	IP20	10mm
MF328W234A80-D040A1A10109N	234	24V	12.4	4000K	80 90	2,480 2,235	775 698	200 180	IP20	10mm
MF328W234A80-D050A1A10109N	234	24V	12.4	5000K	80 90	2,480 2,235	775 698	200 180	IP20	10mm
MF328W234A80-D060A1A10109N	234	24V	12.4	6000K	80 90	2,480 2,235	775 698	200 180	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	167~200Lm/w
Lumen Output/meter:	2065~2480Lm/m (645~775Lm/ft)
Energy Grade:	C

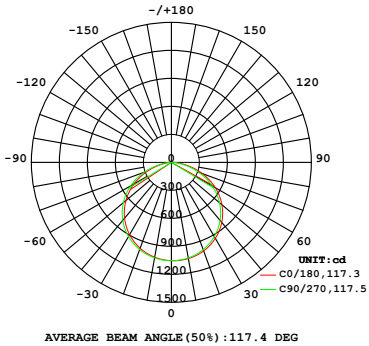

Electric parameter

Input Current/m:	0.52A/m (0.16A/ft)
Input Voltage:	DC24V
Power/M:	12.4W/m (3.78W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	234LEDs/m
Size of Section:	38.5mm(1.51")
LEDs of Section	9 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/80LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V080A80-D027A1A10108N	80	24V	7.2	2700K	80 90	990 860	301 262	137 129	IP20	10mm
MF328V080A80-D030A1A10108N	80	24V	7.2	3000K	80 90	1,035 895	315 273	143 124	IP20	10mm
MF328W080A80-D040A1A10108N	80	24V	7.2	4000K	80 90	1,100 950	335 289	152 134	IP20	10mm
MF328W080A80-D050A1A10108N	80	24V	7.2	5000K	80 90	1,100 950	335 289	152 134	IP20	10mm
MF328W080A80-D060A1A10108N	80	24V	7.2	6000K	80 90	1,100 950	335 289	152 134	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	129~152Lm/w
Lumen Output/meter:	860~1100Lm/m (262~335Lm/ft)
Energy Grade:	D/E

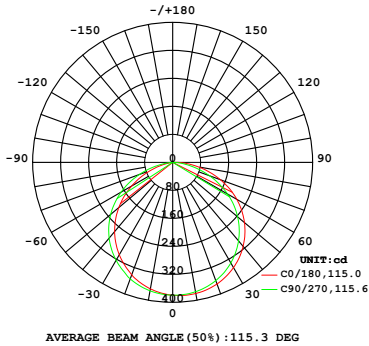

Electric parameter

Input Current/m:	0.3A/m (0.09A/ft)
Input Voltage:	DC24V
Power/M:	7.2W/m (2.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	80LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	8 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/112LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V112A80-D027A1A10108N	112	24V	10	2700K	80/90	1,390/1,230	423/375	139/123	IP20	10mm
MF328V112A80-D030A1A10108N	112	24V	10	3000K	80/90	1,500/1,260	457/384	150/126	IP20	10mm
MF328W112A80-D040A1A10108N	112	24V	10	4000K	80/90	1,555/1,360	474/414	155/136	IP20	10mm
MF328W112A80-D050A1A10108N	112	24V	10	5000K	80/90	1,580/1,395	481/425	158/139	IP20	10mm
MF328W112A80-D060A1A10108N	112	24V	10	6000K	80/90	1,600/1,410	487/429	160/140	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	123~160Lm/w
Lumen Output/meter:	1230~1600Lm/m (375~487Lm/ft)
Enery Grade:	D/E

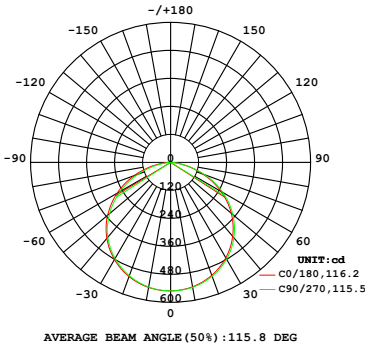

Electric parameter

Input Current/m:	0.42A/m (0.13A/ft)
Input Voltage:	DC24V
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	112LEDs/m
Size of Section:	71.4mm(2.8")
LEDs of Section	8 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/160LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V160A80-D027A1A10108N	160	24V	9.6	2700K	80/90	1,395/1,287	425/503	145/168	IP20	10mm
MF328V160A80-D030A1A10108N	160	24V	9.6	3000K	80/90	1,473/1,359	449/515	153/170	IP20	10mm
MF328W160A80-D040A1A10108N	160	24V	9.6	4000K	80/90	1,550/1,430	473/551	161/172	IP20	10mm
MF328W160A80-D050A1A10108N	160	24V	9.6	5000K	80/90	1,550/1,430	473/547	161/180	IP20	10mm
MF328W160A80-D060A1A10108N	160	24V	9.6	6000K	80/90	1,550/1,752	473/548	161/181	IP20	10mm

Optical parameter


LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	145~181Lm/w
Lumen Output/meter:	1287~1752Lm/m (503~548Lm/ft)
Enery Grade:	D/E

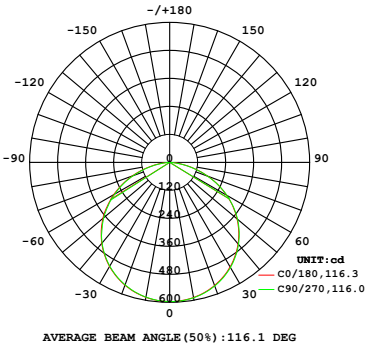

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (39W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	160LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	8 LEDs

Waterproof Rate

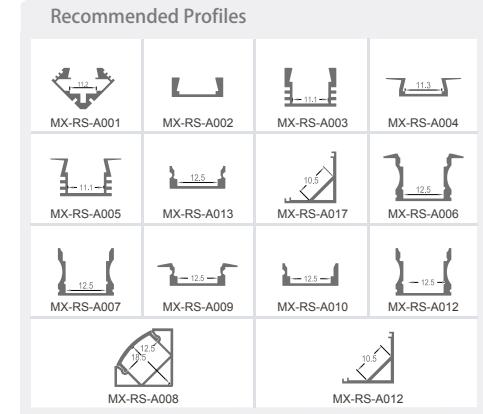


PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/240LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V240A80-D027A1A10108N	240	24V	21.6	2700K	80 90	2,920 2,550	890 777	135 118	IP20	10mm
MF328V240A80-D030A1A10108N	240	24V	21.6	3000K	80 90	3,100 2,650	945 808	143 123	IP20	10mm
MF328W240A80-D040A1A10108N	240	24V	21.6	4000K	80 90	3,265 2,835	995 864	151 131	IP20	10mm
MF328W240A80-D050A1A10108N	240	24V	21.6	5000K	80 90	3,280 2,860	1000 872	152 132	IP20	10mm
MF328W240A80-D060A1A10108N	240	24V	21.6	6000K	80 90	3,290 2,880	1003 878	152 133	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	118~152Lm/w
Lumen Output/meter:	2550~3290Lm/m (777~1003Lm/ft)
Energy Grade:	D/E

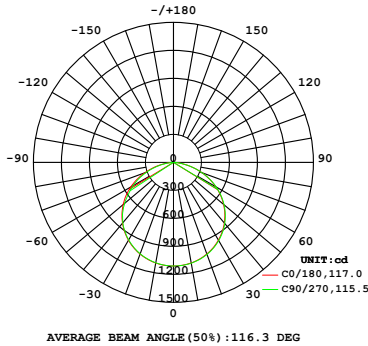

Electric parameter

Input Current/m:	0.9A/m (0.27A/ft)
Input Voltage:	DC24V
Power/M:	21.6W/m (6.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	33.33mm(1.3")
LEDs of Section	8 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/70LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V070A80-D027A1A10107N	70	24V	6	2700K	80 90	724 622	220 189	120 104	IP20	10mm
MF328V070A80-D030A1A10107N	70	24V	6	3000K	80 90	760 650	231 198	127 108	IP20	10mm
MF328W070A80-D040A1A10107N	70	24V	6	4000K	80 90	805 692	245 210	134 115	IP20	10mm
MF328W070A80-D050A1A10107N	70	24V	6	5000K	80 90	810 700	246 213	135 116	IP20	10mm
MF328W070A80-D060A1A10107N	70	24V	6	6000K	80 90	813 698	248 213	136 116	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	104~136Lm/w
Lumen Output/meter:	622~813Lm/m (189~248Lm/ft)
Energy Grade:	E/F

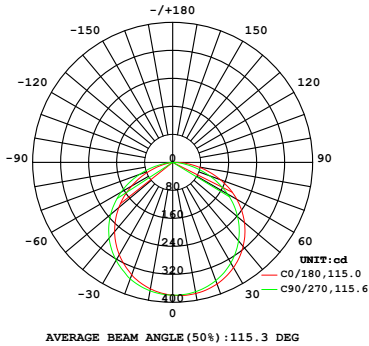

Electric parameter

Input Current/m:	0.25A/m (0.08A/ft)
Input Voltage:	DC24V
Power/M:	6W/m (1.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	70LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	7 LEDs

Waterproof Rate




PRO LED FLEX

PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/126LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V126A80-D027A1A10107N	126	24V	10	2700K	80/90	1,180/1,010	360/307	118/101	IP20	10mm
MF328V126A80-D030A1A10107N	126	24V	10	3000K	80/90	1,240/1,050	378/320	124/105	IP20	10mm
MF328W126A80-D040A1A10107N	126	24V	10	4000K	80/90	1,314/1,131	400/345	131/113	IP20	10mm
MF328W126A80-D050A1A10107N	126	24V	10	5000K	80/90	1,320/1,150	402/350	132/115	IP20	10mm
MF328W126A80-D060A1A10107N	126	24V	10	6000K	80/90	1,325/1,155	404/352	132/115	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	101~132Lm/w
Lumen Output/meter:	1010~1325Lm/m (307~404Lm/ft)
Energy Grade:	E/F

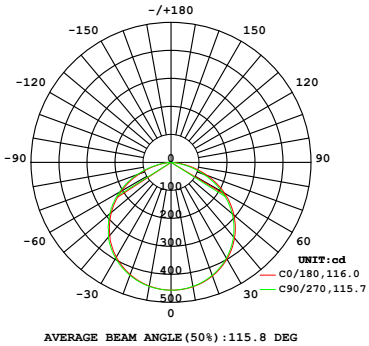

Electric parameter

Input Current/m:	0.42A/m (0.13A/ft)
Input Voltage:	DC24V
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	126LEDs/m
Size of Section:	55.5mm(2.2")
LEDs of Section	7 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/140LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V140A80-D027A1A10107N	140	24V	12	2700K	80/90	1,430/1,200	436/366	119/100	IP20	10mm
MF328V140A80-D030A1A10107N	140	24V	12	3000K	80/90	1,500/1,270	457/387	125/106	IP20	10mm
MF328W140A80-D040A1A10107N	140	24V	12	4000K	80/90	1,592/1,340	485/408	133/117	IP20	10mm
MF328W140A80-D050A1A10107N	140	24V	12	5000K	80/90	1,600/1,380	487/420	133/115	IP20	10mm
MF328W140A80-D060A1A10107N	140	24V	12	6000K	80/90	1,610/1,400	490/427	134/117	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~134Lm/w
Lumen Output/meter:	1200~1610Lm/m (366~490Lm/ft)
Energy Grade:	E/F

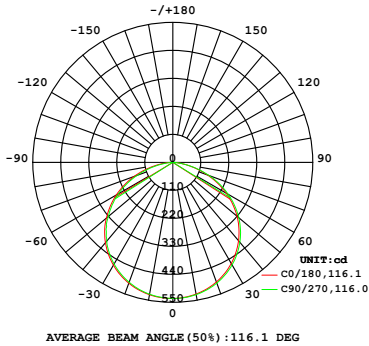

Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.7W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	7 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/168LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V168A80-D027A1A10107N	168	24V	14	2700K	80 90	1,715 1,475	522 449	123 105	IP20	10mm
MF328V168A80-D030A1A10107N	168	24V	14	3000K	80 90	1,800 1,500	548 457	128 107	IP20	10mm
MF328W168A80-D040A1A10107N	168	24V	14	4000K	80 90	1,906 1,641	581 500	136 117	IP20	10mm
MF328W168A80-D050A1A10107N	168	24V	14	5000K	80 90	1,910 1,660	582 506	137 118	IP20	10mm
MF328W168A80-D060A1A10107N	168	24V	14	6000K	80 90	1,915 1,700	583 518	137 121	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	105~137Lm/w
Lumen Output/meter:	1475~1915Lm/m (449~583Lm/ft)
Energy Grade:	E/F

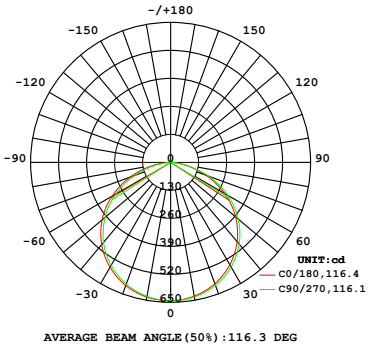

Electric parameter

Input Current/m:	0.58A/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14W/m (4.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	168LEDs/m
Size of Section:	41.6mm(1.64")
LEDs of Section	7 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/196LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V196A80-D027A1A10107N	196	24V	17	2700K	80 90	1,990 1,700	607 518	117 100	IP20	10mm
MF328V196A80-D030A1A10107N	196	24V	17	3000K	80 90	2,050 1,780	625 542	120 105	IP20	10mm
MF328W196A80-D040A1A10107N	196	24V	17	4000K	80 90	2,215 1,893	675 577	130 111	IP20	10mm
MF328W196A80-D050A1A10107N	196	24V	17	5000K	80 90	2,230 1,900	679 579	131 118	IP20	10mm
MF328W196A80-D060A1A10107N	196	24V	17	6000K	80 90	2,240 1,940	683 591	132 114	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~132Lm/w
Lumen Output/meter:	1700~2240Lm/m (518~683Lm/ft)
Energy Grade:	E/F

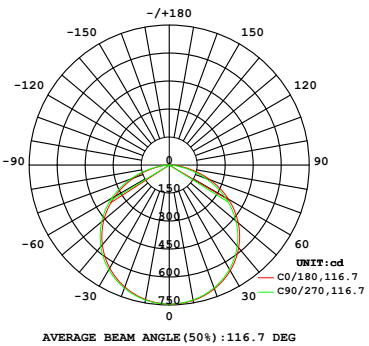

Electric parameter

Input Current/m:	0.7A/m (0.21A/ft)
Input Voltage:	DC24V
Power/M:	17W/m (5.2W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	196LEDs/m
Size of Section:	35.7mm(1.4")
LEDs of Section	7 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/210LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V210A80-D027A1A10107N	210	24V	18	2700K	80 90	2,240 1,950	700 609	116 101	IP20	10mm
MF328V210A80-D030A1A10107N	210	24V	18	3000K	80 90	2,360 2,050	737 640	122 107	IP20	10mm
MF328V210A80-D040A1A10107N	210	24V	18	4000K	80 90	2,310 2,100	721 656	130 117	IP20	10mm
MF328V210A80-D050A1A10107N	210	24V	18	5000K	80 90	2,310 2,100	721 656	137 118	IP20	10mm
MF328V210A80-D060A1A10107N	210	24V	18	6000K	80 90	2,310 2,100	721 656	130 114	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	116~137Lm/w
Lumen Output/meter:	2240~2360Lm/m (700~737Lm/ft)
Energy Grade:	E/F

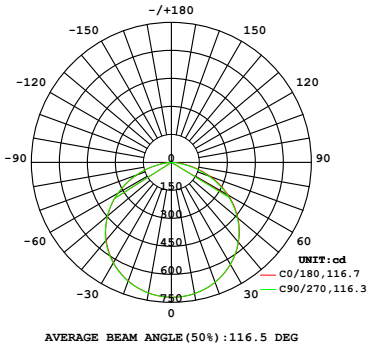

Electric parameter

Input Current/m:	0.75A/m (0.23A/ft)
Input Voltage:	DC24V
Power/M:	18W/m (5.62W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	210LEDs/m
Size of Section:	33.3mm(1.3 inch)
LEDs of Section	7 LEDs

Waterproof Rate




PRO LED FLEX

HIGH EFFICIENCY

● 2835SMD/238LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V238A80-D027A1A10107N	238	24V	22	2700K	80 90	2,540 2,200	774 670	115 100	IP20	10mm
MF328V238A80-D030A1A10107N	238	24V	22	3000K	80 90	2,680 2,300	817 701	121 104	IP20	10mm
MF328W238A80-D040A1A10107N	238	24V	22	4000K	80 90	2,825 2,445	861 745	128 111	IP20	10mm
MF328W238A80-D050A1A10107N	238	24V	22	5000K	80 90	2,850 2,465	868 751	129 112	IP20	10mm
MF328W238A80-D060A1A10107N	238	24V	22	6000K	80 90	2,870 2,470	875 753	130 112	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~132Lm/w
Lumen Output/meter:	2200~2870Lm/m (670~875Lm/ft)
Energy Grade:	E/F

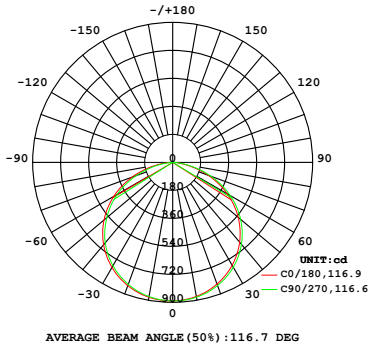

Electric parameter


Input Current/m:	0.92A/m (0.281A/ft)
Input Voltage:	DC24V
Power/M:	22W/m (6.7W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	238LEDs/m
Size of Section:	29.4mm(1.15 inch)
LEDs of Section	7 LEDs

Waterproof Rate



2835SMD/140LEDs
Fresh Flex


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V140A95-D027A1A10107N	140	24V	22	2700K	97	1,368	427	62	IP20	10mm
MF328V140A80-D037A1A10107N	140	24V	22	3700K	80	1,728	540	78	IP20	10mm
MF328V140A80-D050A1A10107N	140	24V	22	5000K	85	1,728	540	78	IP20	10mm
MF328V140A80-D116A1A10107N	140	24V	22	11600K	75	1,728	540	78	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	75/80/85/97
CCT Range:	2700K/3000K/4000K/5000K/11600K
Irritation Angle:	120°
Light Efficiency:	62~78Lm/w
Lumen Output/meter:	1368~1728Lm/m (62~78Lm/ft)
Energy Grade:	E/F

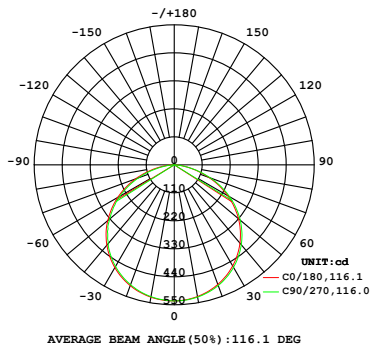


Electric parameter

Input Current/m:	0.9A/m (0.28A/ft)
Input Voltage:	DC24V
Power/M:	22W/m (6.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	7 LEDs


Waterproof Rate




Recommended Profiles

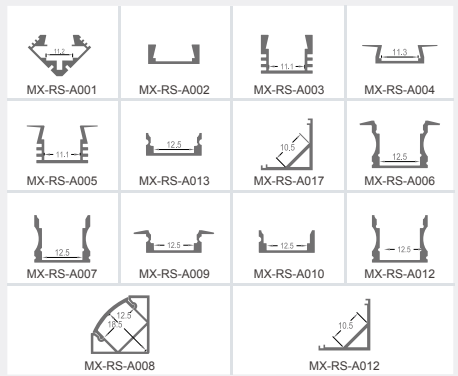


	CCT(K)	RA	IP	Warranty
Fish Strips	11600	75	IP67	3 years
Meat Strips	3700	80	IP67	3 years
Pan Strips	2700	97	IP67	3 years
Vegetable Strips	5000	85	IP67	3 years

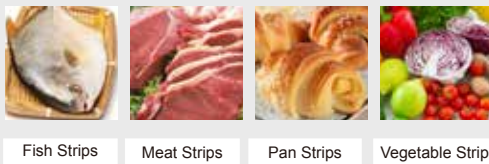


Spectrum For Vegetable

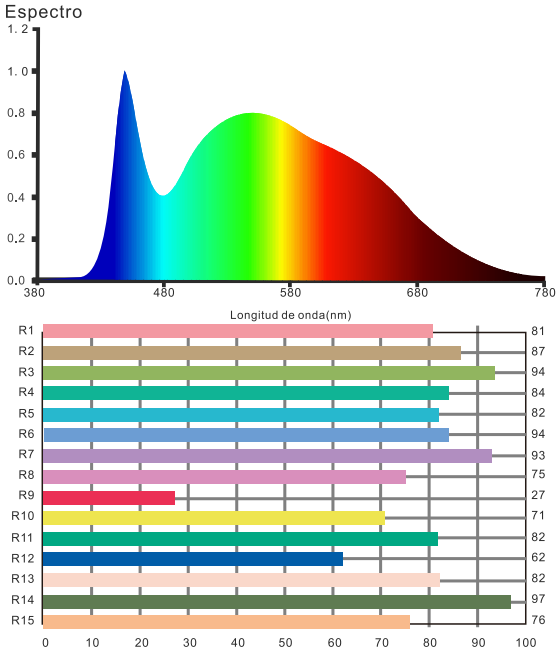


Spectrum For Meat

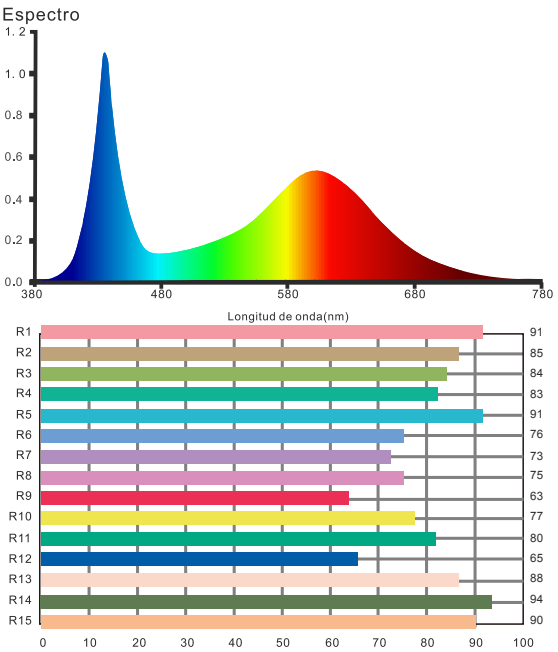

Spectrum For Fish

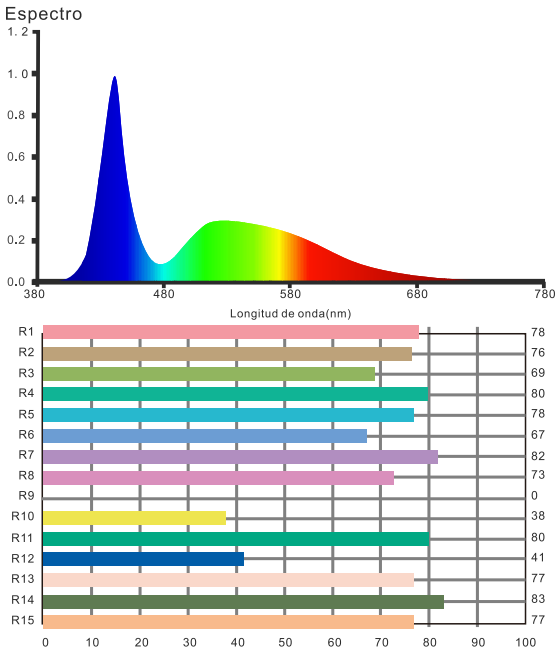

Spectrum For Bread

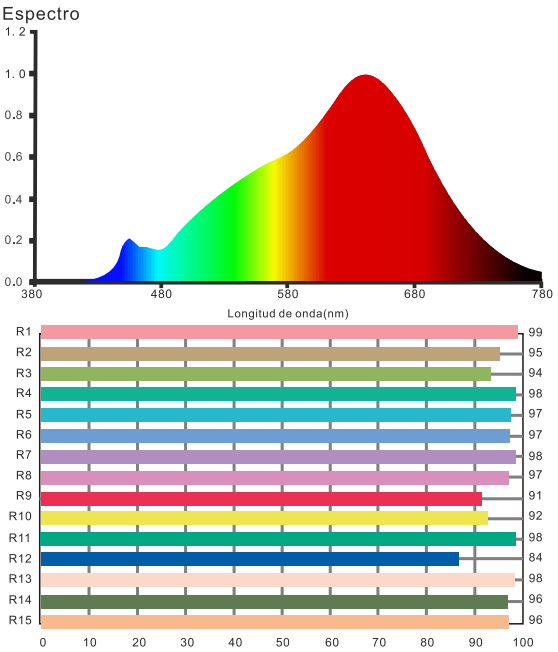






LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes,including indoor and outdoor decorations.From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.





● 2835SMD/60LED ECO


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V060A80-D027A1A10106N	60	24V	12	2700K	80	1,080	337	90	IP20	10mm
MF328V060A80-D030A1A10106N	60	24V	12	3000K	80	1,140	356	95	IP20	10mm
MF328W060A80-D040A1A10106N	60	24V	12	4000K	80	1,200	375	100	IP20	10mm
MF328W060A80-D050A1A10106N	60	24V	12	5000K	80	1,200	375	100	IP20	10mm
MF328W060A80-D060A1A10106N	60	24V	12	6500K	80	1,200	375	100	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	90~100Lm/w
Lumen Output/meter:	1080~1200Lm/m (337~375Lm/ft)
Enery Grade:	G

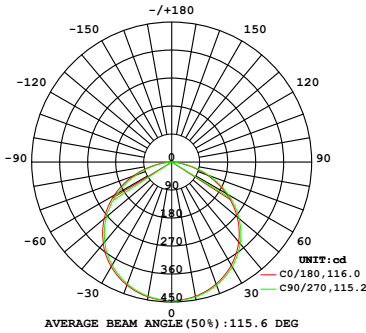


Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate




Recommended Profiles

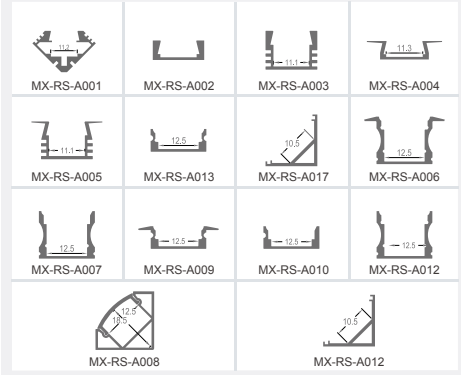

● 2835SMD/120LED ECO


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V120A80-D027A1A10106N	120	24V	15	2700K	80	1,350	412	90	IP20	10mm
MF328V120A80-D030A1A10106N	120	24V	15	3000K	80	1,425	434	95	IP20	10mm
MF328W120A80-D040A1A10106N	120	24V	15	4000K	80	1,500	457	100	IP20	10mm
MF328W120A80-D050A1A10106N	120	24V	15	5000K	80	1,500	457	100	IP20	10mm
MF328W120A80-D060A1A10106N	120	24V	15	6000K	80	1,500	457	100	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	90~100Lm/w
Lumen Output/meter:	1350~1500Lm/m (412~457Lm/ft)
Energy Grade:	G

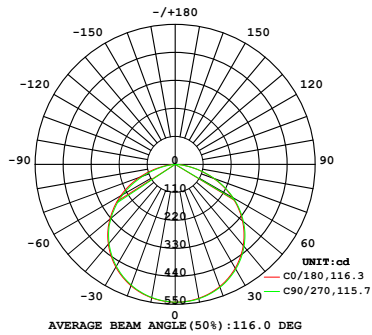

Electric parameter


Input Current/m:	0.62A/m (0.2A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.6W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	6 LEDs

Waterproof Rate



● 2835SMD/240LED ECO


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V240A80-D027A1A10106N	240	24V	21.6	2700K	80	2,041	637	95	IP20	10mm
MF328V240A80-D030A1A10106N	240	24V	21.6	3000K	80	2,160	675	100	IP20	10mm
MF328W240A80-D040A1A10106N	240	24V	21.6	4000K	80	2,268	708	105	IP20	10mm
MF328W240A80-D050A1A10106N	240	24V	21.6	5000K	80	2,268	708	105	IP20	10mm
MF328W240A80-D060A1A10106N	240	24V	21.6	6000K	80	2,268	708	105	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	95~105Lm/w
Lumen Output/meter:	2041~2268Lm/m (637~708Lm/ft)
Energy Grade:	G

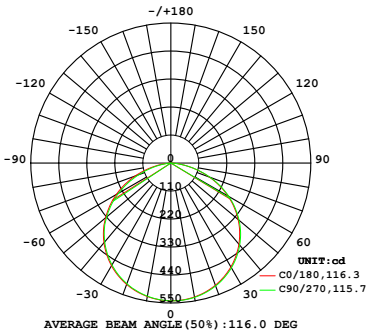

Electric parameter


Input Current/m:	0.9A/m (0.27A/ft)
Input Voltage:	DC24V
Power/M:	21.6W/m (6.58W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	6 LEDs

Waterproof Rate



● 2216SMD/240LED STA


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF322V240A90-D027A1A10106N	240	24V	15	2700K	90	1,200	365	80	IP20	10mm
MF322V240A90-D030A1A10106N	240	24V	15	3000K	90	1,275	388	85	IP20	10mm
MF322W240A90-D040A1A10106N	240	24V	15	4000K	90	1,350	411	90	IP20	10mm
MF322W240A90-D050A1A10106N	240	24V	15	5000K	90	1,350	411	90	IP20	10mm
MF322W240A90-D060A1A10106N	240	24V	15	6000K	90	1,350	411	90	IP20	10mm

Optical parameter

LED Type:	SMD2116
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	80~90Lm/w
Lumen Output/meter:	1200~1350Lm/m (365~411Lm/ft)
Energy Grade:	G

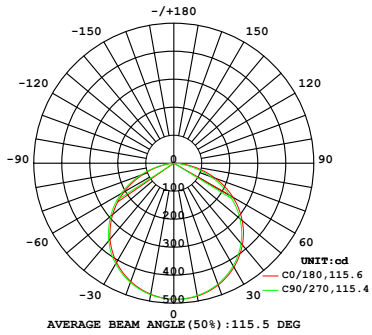

Electric parameter


Input Current/m:	0.62A/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	15W/m (4.6W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	6 LEDs

Waterproof Rate



● 2216SMD/300LED STA


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF322V300A90-D027A1A10106N	300	24V	21.6	2700K	90	1,665	520	77	IP20	10mm
MF322V300A90-D030A1A10106N	300	24V	21.6	3000K	90	1,755	554	81	IP20	10mm
MF322W300A90-D040A1A10106N	300	24V	21.6	4000K	90	1,880	587	86	IP20	10mm
MF322W300A90-D050A1A10106N	300	24V	21.6	5000K	90	1,880	587	86	IP20	10mm
MF322W300A90-D060A1A10106N	300	24V	21.6	6000K	90	1,880	587	86	IP20	10mm

Optical parameter

LED Type:	SMD2116
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	77~86Lm/w
Lumen Output/meter:	1665~1880Lm/m (520~587Lm/ft)
Energy Grade:	G

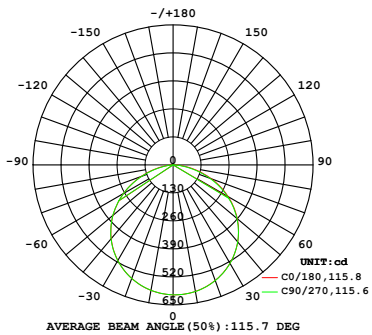


Electric parameter

Input Current/m:	0.9A/m (0.27A/ft)
Input Voltage:	DC24V
Power/M:	21.6W/m (6.58W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	300LEDs/m
Size of Section:	20mm(0.79")
LEDs of Section	6 LEDs

Waterproof Rate





Recommended Profiles

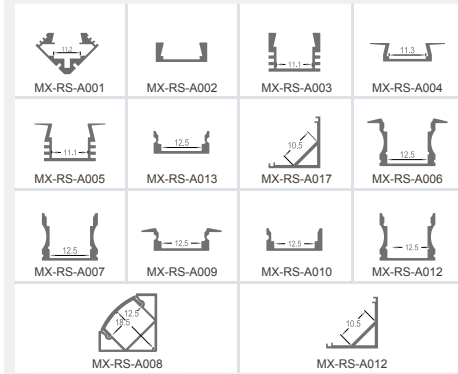

● 2216SMD/420LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

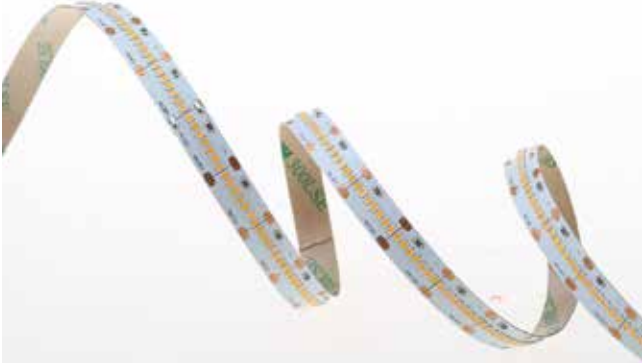

Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF322V420A90-D027A1A10107N	420	24V	24	2700K	90	1,920	600	80	IP20	10mm
MF322V420A90-D030A1A10107N	420	24V	24	3000K	90	2,040	637	85	IP20	10mm
MF322W420A90-D040A1A10107N	420	24V	24	4000K	90	2,160	675	90	IP20	10mm
MF322W420A90-D050A1A10107N	420	24V	24	5000K	90	2,160	675	90	IP20	10mm
MF322W420A90-D060A1A10107N	420	24V	24	6000K	90	2,160	675	90	IP20	10mm

Optical parameter

LED Type:	SMD2116
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	80~90Lm/w
Lumen Output/meter:	1920~2160Lm/m (600~675Lm/ft)
Energy Grade:	G

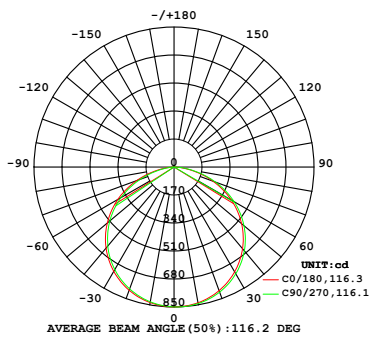

Electric parameter


Input Current/m:	1A/m (0.3A/ft)
Input Voltage:	DC24V
Power/M:	24W/m (6.7W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	420LEDs/m
Size of Section:	16.7mm(0.66")
LEDs of Section	7 LEDs

Waterproof Rate



● 2110SMD/560LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF321V560A90-D027A1A10107N	560	24V	23	2700K	90	1,710	534	74	IP20	10mm
MF321V560A90-D030A1A10107N	560	24V	23	3000K	90	1,850	578	78	IP20	10mm
MF321W560A90-D040A1A10107N	560	24V	23	4000K	90	1,900	593	83	IP20	10mm
MF321W560A90-D050A1A10107N	560	24V	23	5000K	90	1,900	593	83	IP20	10mm
MF321W560A90-D060A1A10107N	560	24V	23	6000K	90	1,900	593	83	IP20	10mm

Optical parameter

LED Type:	SMD2110
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	74~83Lm/w
Lumen Output/meter:	1710~1900Lm/m (534~593Lm/ft)
Energy Grade:	G

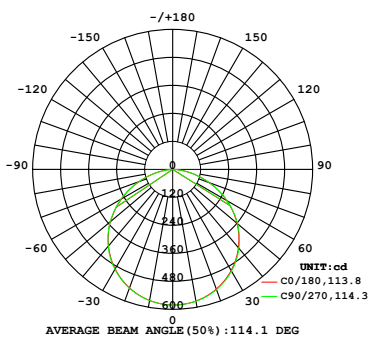

Electric parameter

Input Current/m:	0.95A/m (0.29A/ft)
Input Voltage:	DC24V
Power/M:	23W/m (7.18W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	560LEDs/m
Size of Section:	12.5mm(0.49")
LEDs of Section	7 LEDs


Waterproof Rate



STA LED FLEX

● 2110SMD/700LED

- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.




HIGH EFFICIENCY

Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF321V700A90-D027A1A10107N	700	24V	24	2700K	90	1,620	506	65	IP20	10mm
MF321V700A90-D030A1A10107N	700	24V	24	3000K	90	1,710	534	68	IP20	10mm
MF321W700A90-D040A1A10107N	700	24V	24	4000K	90	1,800	562	72	IP20	10mm
MF321W700A90-D050A1A10107N	700	24V	24	5000K	90	1,800	562	72	IP20	10mm
MF321W700A90-D060A1A10107N	700	24V	24	6000K	90	1,800	562	72	IP20	10mm

Optical parameter

LED Type:	SMD2110
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	65~72Lm/w
Lumen Output/meter:	1620~1800Lm/m (506~562Lm/ft)
Energy Grade:	G

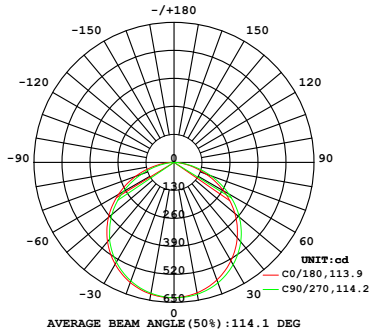

Electric parameter

Input Current/m:	1A/m (0.31A/ft)
Input Voltage:	DC24V
Power/M:	24W/m (7.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	700LEDs/m
Size of Section:	10mm(0.39")
LEDs of Section	7 LEDs


Waterproof Rate



STA LED FLEX

● 3528SMD/60LED

- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.




ECONOMY FLEX

Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF335V060A80-D027A1A10106N	60	24V	4.8	2700K	80	360	109	75	IP20	8mm
MF335V060A80-D030A1A10106N	60	24V	4.8	3000K	80	384	117	80	IP20	8mm
MF335W060A80-D040A1A10106N	60	24V	4.8	4000K	80	408	124	85	IP20	8mm
MF335W060A80-D050A1A10106N	60	24V	4.8	5000K	80	408	124	85	IP20	8mm
MF335W060A80-D060A1A10106N	60	24V	4.8	6000K	80	408	124	85	IP20	8mm

Optical parameter

LED Type:	SMD3528
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	75~85Lm/w
Lumen Output/meter:	360~408Lm/m (109~124Lm/ft)
Energy Grade:	G

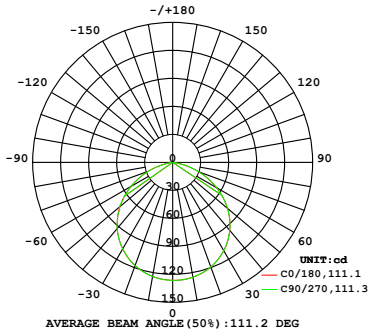


Electric parameter

Input Current/m:	0.2A/m (0.29A/ft)
Input Voltage:	DC24V
Power/M:	4.8W/m (1.46W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate



Recommended Profiles

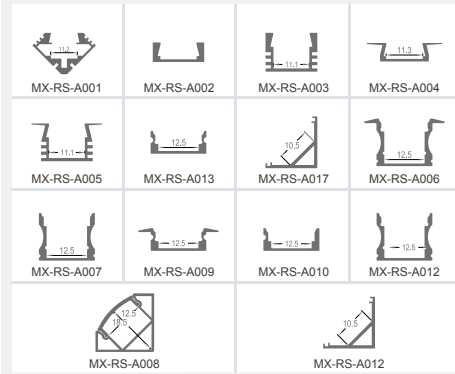


STA LED FLEX

ECONOMY FLEX

● 3528SMD/120LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF335V120A80-D027A1A10106N	120	24V	9.6	2700K	80	720	219	75	IP20	10mm
MF335V120A80-D030A1A10106N	120	24V	9.6	3000K	80	768	234	80	IP20	10mm
MF335W120A80-D040A1A10106N	120	24V	9.6	4000K	80	816	248	85	IP20	10mm
MF335W120A80-D050A1A10106N	120	24V	9.6	5000K	80	816	248	85	IP20	10mm
MF335W120A80-D060A1A10106N	120	24V	9.6	6000K	80	816	248	85	IP20	10mm

Optical parameter

LED Type:	SMD3528
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	75~85Lm/w
Lumen Output/meter:	720~816Lm/m (219~248Lm/ft)
Enery Grade:	G

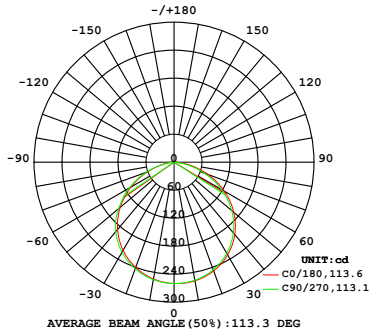

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (2.93W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	6 LEDs

Waterproof Rate




STA LED FLEX

ECONOMY FLEX

● 3528SMD/240LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF335V240A80-D027A1A10106N	240	24V	19.2	2700K	80	1,440	439	75	IP20	10mm
MF335V240A80-D030A1A10106N	240	24V	19.2	3000K	80	1,536	468	80	IP20	10mm
MF335W240A80-D040A1A10106N	240	24V	19.2	4000K	80	1,632	497	85	IP20	10mm
MF335W240A80-D050A1A10106N	240	24V	19.2	5000K	80	1,632	497	85	IP20	10mm
MF335W240A80-D060A1A10106N	240	24V	19.2	6000K	80	1,632	497	85	IP20	10mm

Optical parameter

LED Type:	SMD3528
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	75~85Lm/w
Lumen Output/meter:	1440~1632Lm/m (439~497Lm/ft)
Enery Grade:	G

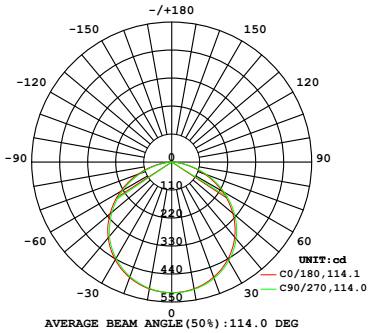

Electric parameter

Input Current/m:	0.8A/m (0.24A/ft)
Input Voltage:	DC24V
Power/M:	19.2W/m (5.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	6 LEDs


Waterproof Rate



ECONOMY FLEX

● 5050SMD/30LED ECO


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350V030A80-D027A1A10106N	30	24V	7.2	2700K	80	576	175	80	IP20	10mm
MF350V030A80-D030A1A10106N	30	24V	7.2	3000K	80	590	180	82	IP20	10mm
MF350W030A80-D040A1A10106N	30	24V	7.2	4000K	80	612	186	85	IP20	10mm
MF350W030A80-D050A1A10106N	30	24V	7.2	5000K	80	612	186	85	IP20	10mm
MF350W030A80-D060A1A10106N	30	24V	7.2	6000K	80	612	186	85	IP20	10mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	80~85Lm/w
Lumen Output/meter:	576~612Lm/m (175~186Lm/ft)
Energy Grade:	G

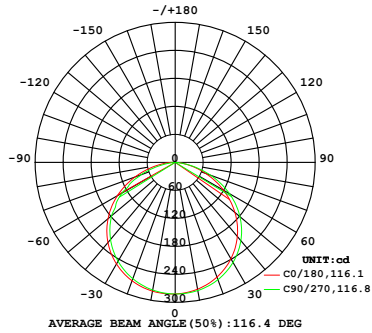

Electric parameter

Input Current/m:	0.3A/m (0.09A/ft)
Input Voltage:	DC24V
Power/M:	7.2W/m (2.2W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	30LEDs/m
Size of Section:	166.66mm(6.56")
LEDs of Section	5 LEDs


Waterproof Rate



STA LED FLEX

● 5050SMD/60LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350V060A80-D027A1A10106N	60	24V	14.4	2700K	80	1,206	368	84	IP20	10mm
MF350V060A80-D030A1A10106N	60	24V	14.4	3000K	80	1,273	388	88	IP20	10mm
MF350W060A80-D040A1A10106N	60	24V	14.4	4000K	80	1,324	409	93	IP20	10mm
MF350W060A80-D050A1A10106N	60	24V	14.4	5000K	80	1,324	409	93	IP20	10mm
MF350W060A80-D060A1A10106N	60	24V	14.4	6000K	80	1,324	409	93	IP20	10mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	84~93Lm/w
Lumen Output/meter:	1206~1324Lm/m (368~409Lm/ft)
Energy Grade:	G

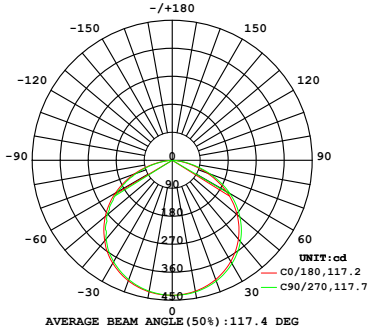

Electric parameter

Input Current/m:	0.6A/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14.4W/m (4.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate




ECONOMY FLEX

STA LED FLEX



● 5050SMD/120LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350V120A80-D027A1A20112N	120	24V	24	2700K	80	2,025	632	84	IP20	20mm
MF350V120A80-D030A1A20112N	120	24V	24	3000K	80	2,138	668	89	IP20	20mm
MF350W120A80-D040A1A20112N	120	24V	24	4000K	80	2,250	703	94	IP20	20mm
MF350W120A80-D050A1A20112N	120	24V	24	5000K	80	2,250	703	94	IP20	20mm
MF350W120A80-D060A1A20112N	120	24V	24	6000K	80	2,250	703	94	IP20	20mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	84~94Lm/w
Lumen Output/meter:	2025~2250Lm/m (632~703Lm/ft)
Enery Grade:	G

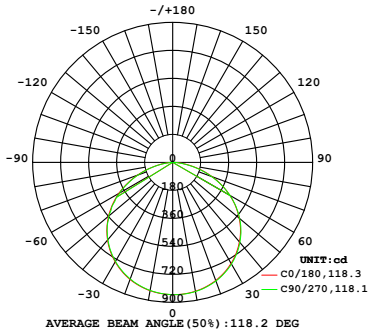


Electric parameter

Input Current/m:	1A/m (0.3A/ft)
Input Voltage:	DC24V
Power/M:	24W/m (7.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	100mm(3.93")
LEDs of Section	12 LEDs

Waterproof Rate




Recommended Profiles

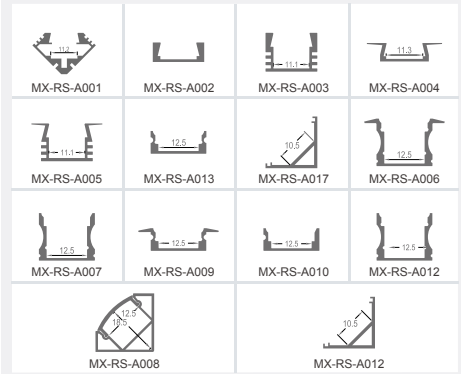

● 3014SMD/120LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF331V120A80-D027A1A10106N	120	24V	12	2700K	80	1,116	340	93	IP20	10mm
MF331V120A80-D030A1A10106N	120	24V	12	3000K	80	1,178	359	98	IP20	10mm
MF331W120A80-D040A1A10106N	120	24V	12	4000K	80	1,240	378	103	IP20	10mm
MF331W120A80-D050A1A10106N	120	24V	12	5000K	80	1,240	378	103	IP20	10mm
MF331W120A80-D060A1A10106N	120	24V	12	6000K	80	1,240	378	103	IP20	10mm

Optical parameter

LED Type:	SMD3014
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	93~103Lm/w
Lumen Output/meter:	1116~1240Lm/m (340~378Lm/ft)
Energy Grade:	G

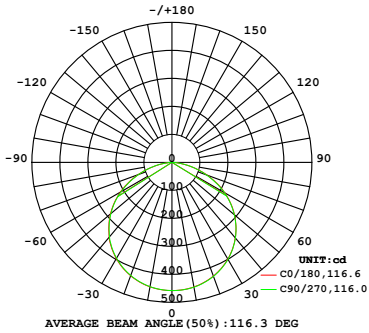

Electric parameter


Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.6W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	6 LEDs

Waterproof Rate



● 3014SMD/280LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF331V280A80-D027A1A10107N	280	24V	19.2	2700K	80	2,106	658	111	IP20	10mm
MF331V280A80-D030A1A10107N	280	24V	19.2	3000K	80	2,223	694	117	IP20	10mm
MF331W280A80-D040A1A10107N	280	24V	19.2	4000K	80	2,340	731	123	IP20	10mm
MF331W280A80-D050A1A10107N	280	24V	19.2	5000K	80	2,340	731	123	IP20	10mm
MF331W280A80-D060A1A10107N	280	24V	19.2	6000K	80	2,340	731	123	IP20	10mm

Optical parameter

LED Type:	SMD3014
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	111~123Lm/w
Lumen Output/meter:	2106~2340Lm/m (658~731Lm/ft)
Energy Grade:	G

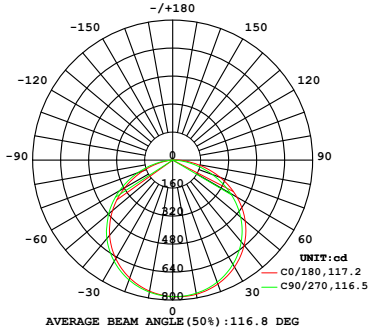

Electric parameter

Input Current/m:	0.8A/m (0.24A/ft)
Input Voltage:	DC24V
Power/M:	19.2W/m (5.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	280LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	7 LEDs


Waterproof Rate



STA LED FLEX

● 3014SMD/300LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF331V300A80-D027A1A10106N	300	24V	24	2700K	80	2,241	700	93	IP20	10mm
MF331V300A80-D030A1A10106N	300	24V	24	3000K	80	2,366	739	99	IP20	10mm
MF331W300A80-D040A1A10106N	300	24V	24	4000K	80	2,490	778	104	IP20	10mm
MF331W300A80-D050A1A10106N	300	24V	24	5000K	80	2,490	778	104	IP20	10mm
MF331W300A80-D060A1A10106N	300	24V	24	6000K	80	2,490	778	104	IP20	10mm

Optical parameter

LED Type:	SMD3014
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	93~104Lm/w
Lumen Output/meter:	2241~2490Lm/m (700~778Lm/ft)
Enery Grade:	G

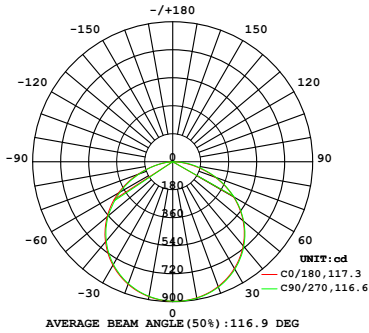

Electric parameter

Input Current/m:	1A/m (0.3A/ft)
Input Voltage:	DC24V
Power/M:	24W/m (7.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	300LEDs/m
Size of Section:	20mm(0.78")
LEDs of Section	6 LEDs

Waterproof Rate




ECONOMY FLEX

STA LED FLEX

● 2835SMD/60LED
S-type


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF228V060A80-D027A1A06103N	60	12V	6	2700K	80	540	164	90	IP20	6mm
MF228V060A80-D030A1A06103N	60	12V	6	3000K	80	570	173	95	IP20	6mm
MF228W060A80-D040A1A06103N	60	12V	6	4000K	80	600	182	100	IP20	6mm
MF228W060A80-D050A1A06103N	60	12V	6	5000K	80	600	182	100	IP20	6mm
MF228W060A80-D060A1A06103N	60	12V	6	6000K	80	600	182	100	IP20	6mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	90~100Lm/w
Lumen Output/meter:	540~600Lm/m (164~182Lm/ft)
Enery Grade:	G

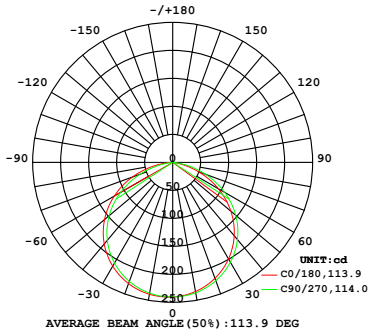


Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC12V
Power/M:	6W/m (1.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	3 LEDs

Waterproof Rate




Recommended Profiles

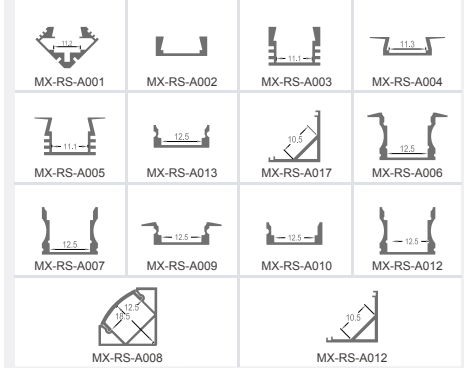

● 5050SMD/60LED
RGB S-type


- Use S shape PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,IP20 and IP65 are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF250A060A00-D000J1A12103N	60	12V	2.7	RED	N/A	68	21	25	IP20	12mm
	60	12V	2.7	GREEN	N/A	220	67	81	IP20	12mm
	60	12V	2.7	BLUE	N/A	63	19	23	IP20	12mm
	60	12V	8	RGB	N/A	350	107	44	IP20	12mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	N/A
CCT Range:	RGB
Irritation Angle:	120°
Light Efficiency:	81Lm/w Max
Lumen Output/meter:	350Lm/m Max
Enery Grade:	G

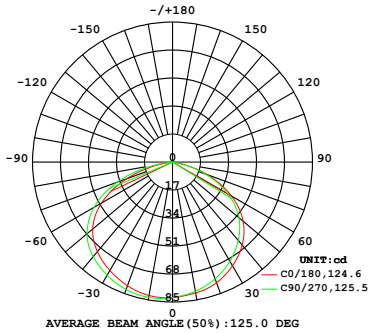

Electric parameter


Input Current/m:	0.66A/m (0.2A/ft)
Input Voltage:	DC12V
Power/M:	8W/m (2.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate



● 5050SMD/42LED
RGBW S-type


- Use S shape PCB,R:620-630nm,G:515-525nm,B:5460-470nm,W:2700-6000K LEDs;
- Can set with controller if you need,IP20 and IP65 are available;
- 3M tape for installation,5 years warranty.

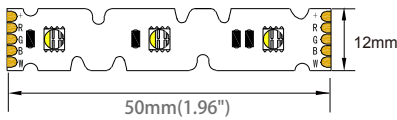

Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF250Z042A80-D000K1A12103N	42	12V	2.5	RED	N/A	72	22	29	IP20	12mm
	42	12V	2.5	GREEN	N/A	181	55	72	IP20	12mm
	42	12V	2.5	BLUE	N/A	43	13	17	IP20	12mm
	42	12V	2.5	2700~6000	>80	215	66	86	IP20	12mm
	42	12V	12.5	RGBW	N/A	510	155	51	IP20	12mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	N/A
CCT Range:	RGBW
Irritation Angle:	120°
Light Efficiency:	86Lm/w Max
Lumen Output/meter:	510Lm/m Max
Enery Grade:	G

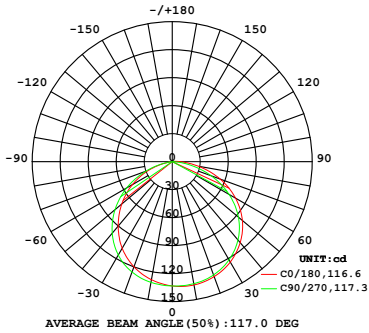

Electric parameter

Input Current/m:	1.04A/m (0.32A/ft)
Input Voltage:	DC12V
Power/M:	12.5W/m (Max)
Static Electricity:	1000V (ESD)
LEDs/Meter:	42LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	3 LEDs


Waterproof Rate



STA LED FLEX

3014 SIDE VIEW
140LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF331V140A90-D027A1A08106N	140	24V	9.6	2700K	90	945	288	98	IP20	8mm
MF331V140A90-D030A1A08106N	140	24V	9.6	3000K	90	998	304	104	IP20	8mm
MF331W140A90-D040A1A08106N	140	24V	9.6	4000K	90	1,080	320	109	IP20	8mm
MF331W140A90-D050A1A08106N	140	24V	9.6	5000K	90	1,080	320	80	IP20	8mm
MF331W140A90-D060A1A08106N	140	24V	9.6	6000K	90	1,080	320	80	IP20	8mm

Optical parameter

LED Type:	SMD3014
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	98~109Lm/w
Lumen Output/meter:	945~1080Lm/m (288~320Lm/ft)
Energy Grade:	G

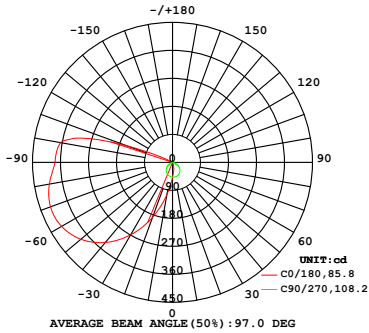


Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (2.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	7 LEDs

Waterproof Rate



Recommended Profiles

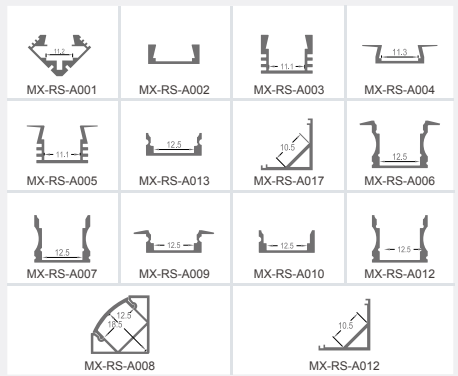

STA LED FLEX



CABINET STRIP SERIES

LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes,including indoor and outdoor decorations.From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.




CABINET STRIP SERIES

SLIM STRIP

● COB 400LED 5MM


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF209V400A90-D027A1A05106N	400	12V	7.2	2700K	90	700	218	98	IP20	5mm
MF209V400A90-D030A1A05106N	400	12V	7.2	3000K	90	720	225	101	IP20	5mm
MF209W400A90-D040A1A05106N	400	12V	7.2	4000K	90	760	237	106	IP20	5mm
MF209W400A90-D050A1A05106N	400	12V	7.2	5000K	90	760	237	106	IP20	5mm
MF209W400A90-D060A1A05106N	400	12V	7.2	6000K	90	760	237	106	IP20	5mm

Optical parameter

LED Type:	COB
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	98~106Lm/w
Lumen Output/meter:	700~760Lm/m (218~237Lm/ft)
Enery Grade:	G

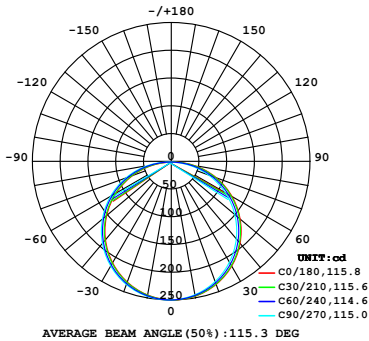

Electric parameter

Input Current/m:	0.6A/m (0.18A/ft)
Input Voltage:	DC12V
Power/M:	7.2W/m (2.25W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	400LEDs/m
Size of Section:	20mm(0.78")
LEDs of Section	6 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 12V-2835-120LED 4MM


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF228V120A90-D027A1A04103N	120	12V	8	2700K	90	734	224	92	IP20	4mm
MF228V120A90-D030A1A04103N	120	12V	8	3000K	90	775	236	97	IP20	4mm
MF228W120A90-D040A1A04103N	120	12V	8	4000K	90	816	248	102	IP20	4mm
MF228W120A90-D050A1A04103N	120	12V	8	5000K	90	816	248	102	IP20	4mm
MF228W120A90-D060A1A04103N	120	12V	8	6000K	90	816	248	102	IP20	4mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	92~102Lm/w
Lumen Output/meter:	734~816Lm/m (224~248Lm/ft)
Enery Grade:	G

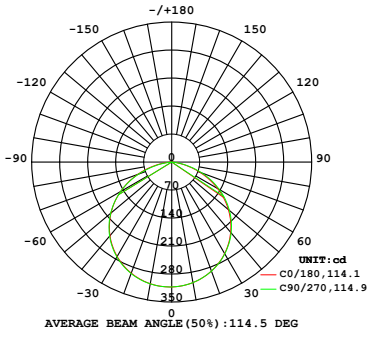

Electric parameter

Input Current/m:	0.7A/m (0.21A/ft)
Input Voltage:	DC12V
Power/M:	8W/m (2.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	3 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 12V-2835-120LED 5MM


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF228V120A90-D027A1A05103N	120	12V	8	2700K	90	734	224	92	IP20	5mm
MF228V120A90-D030A1A05103N	120	12V	8	3000K	90	775	236	97	IP20	5mm
MF228W120A90-D040A1A05103N	120	12V	8	4000K	90	816	248	102	IP20	5mm
MF228W120A90-D050A1A05103N	120	12V	8	5000K	90	816	248	102	IP20	5mm
MF228W120A90-D060A1A05103N	120	12V	8	6000K	90	816	248	102	IP20	5mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	92~102Lm/w
Lumen Output/meter:	734~816Lm/m (224~248Lm/ft)
Enery Grade:	G

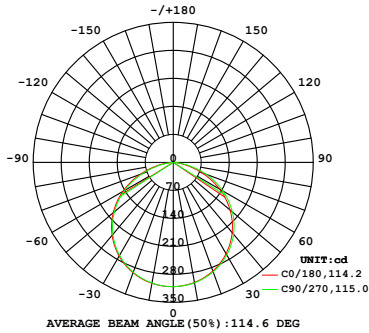

Electric parameter

Input Current/m:	0.7A/m (0.21A/ft)
Input Voltage:	DC12V
Power/M:	8W/m (2.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	3 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 2835-150LED 5MM


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF228V150A90-D027A1A05103N	150	12V	8	2700K	90	734	229	92	IP20	5mm
MF228V150A90-D030A1A05103N	150	12V	8	3000K	90	775	242	97	IP20	5mm
MF228W150A90-D040A1A05103N	150	12V	8	4000K	90	816	255	102	IP20	5mm
MF228W150A90-D050A1A05103N	150	12V	8	5000K	90	816	255	102	IP20	5mm
MF228W150A90-D060A1A05103N	150	12V	8	6000K	90	816	255	102	IP20	5mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	92~102Lm/w
Lumen Output/meter:	734~816Lm/m (229~255Lm/ft)
Enery Grade:	G

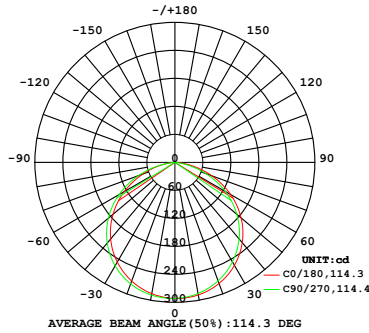

Electric parameter

Input Current/m:	0.7A/m (0.21A/ft)
Input Voltage:	DC12V
Power/M:	8W/m (2.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	150LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	3 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 3014SMD/240LED 5MM


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF231U240A90-D8011IA05106N	240	12V	7	2700K	90	580	177	83	IP20	5mm
MF231U240A90-D8011IA05106N	240	12V	7	6800K	90	600	183	86	IP20	5mm

Optical parameter

LED Type:	SMD3014
Color Rendering Index:	90
CCT Range:	2700K-6800K
Irritation Angle:	120°
Light Efficiency:	83~86Lm/w
Lumen Output/meter:	580~600Lm/m (181~187Lm/ft)
Enery Grade:	G

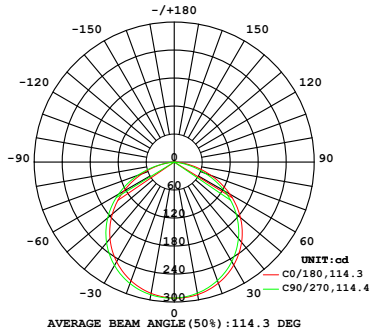

Electric parameter

Input Current/m:	0.58A/m (0.18A/ft)
Input Voltage:	DC12V
Power/M:	7W/m (2.18W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	25mm(0.98")
LEDs of Section	6 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 2216SMD/120LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF322V120A90-D027A1A04106N	120	24V	9.6	2700K	90	796	242	83	IP20	4mm
MF322V120A90-D030A1A04106N	120	24V	9.6	3000K	90	816	248	85	IP20	4mm
MF322W120A90-D040A1A04106N	120	24V	9.6	4000K	90	844	257	88	IP20	4mm
MF322W120A80-D050A1A04106N	120	24V	9.6	5000K	90	844	257	88	IP20	4mm
MF322W120A80-D060A1A04106N	120	24V	9.6	6000K	90	844	257	88	IP20	4mm

Optical parameter

LED Type:	SMD2216
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	83~88Lm/w
Lumen Output/meter:	796~844Lm/m (242~257Lm/ft)
Enery Grade:	G

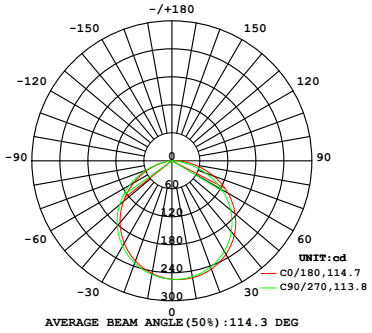

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (2.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	6 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 2216SMD/192LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF322V192A90-D027A1A05106N	192	24V	10	2700K	90	810	247	81	IP20	5mm
MF322V192A90-D030A1A05106N	192	24V	10	3000K	90	850	259	88	IP20	5mm
MF322W192A90-D040A1A05106N	192	24V	10	4000K	90	900	274	90	IP20	5mm
MF322W192A80-D050A1A05106N	192	24V	10	5000K	90	900	274	90	IP20	5mm
MF322W192A80-D060A1A05106N	192	24V	10	6000K	90	900	274	90	IP20	5mm

Optical parameter

LED Type:	SMD2116
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	81~90Lm/w
Lumen Output/meter:	810~900Lm/m (247~274Lm/ft)
Energy Grade:	G

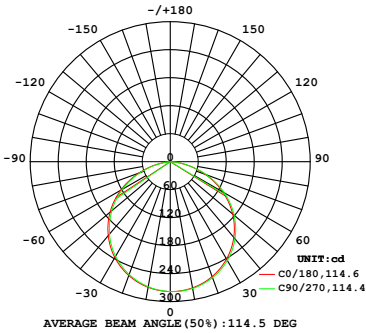

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	10W/m (3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	192LEDs/m
Size of Section:	31.25mm(1.23")
LEDs of Section	6 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 2216SMD/204LED 4MM


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF322V204A90-D027A1A04106N	204	24V	9.6	2700K	90	734	224	78	IP20	4mm
MF322V204A90-D030A1A04106N	204	24V	9.6	3000K	90	775	234	80	IP20	4mm
MF322W204A90-D040A1A04106N	204	24V	9.6	4000K	90	816	248	85	IP20	4mm
MF322W204A80-D050A1A04106N	204	24V	9.6	5000K	90	816	248	85	IP20	4mm
MF322W204A80-D060A1A04106N	204	24V	9.6	6000K	90	816	248	85	IP20	4mm

Optical parameter

LED Type:	SMD2216
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	78~85Lm/w
Lumen Output/meter:	734~816Lm/m (224~248Lm/ft)
Energy Grade:	G

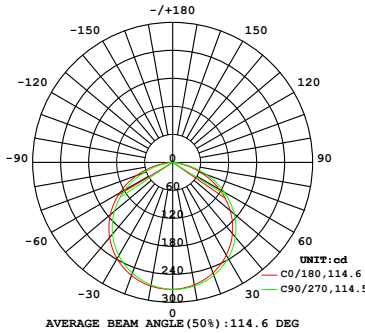

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (2.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	204LEDs/m
Size of Section:	29.4mm(1.16")
LEDs of Section	6 LEDs

Waterproof Rate




CABINET STRIP SERIES

SLIM STRIP

● 2835SMD/140LED 5MM


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V140A80-D027A1A05107N	140	24V	12	2700K	90	1,200	365	100	IP20	5mm
MF328V140A80-D030A1A05107N	140	24V	12	3000K	90	1,200	365	100	IP20	5mm
MF328W140A80-D040A1A05107N	140	24V	12	4000K	90	1,320	402	110	IP20	5mm
MF328W140A80-D050A1A05107N	140	24V	12	5000K	90	1,320	402	110	IP20	5mm
MF328W140A80-D060A1A05107N	140	24V	12	6000K	90	1,320	402	110	IP20	5mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	1200~1320Lm/m (365~402Lm/ft)
Energy Grade:	G

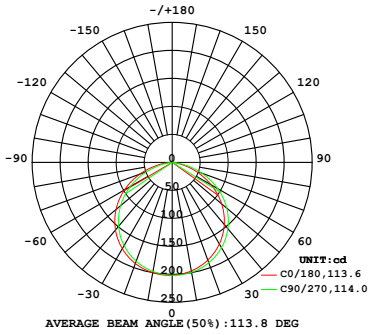

Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.6W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	7 LEDs

Waterproof Rate




CABINET STRIP SERIES

SUPER LONG

● 2835SMD/120LED Ultra Long


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- Constant current;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width	Max length
MF328V120A80-D027A1A10106C	120	24V	9.6	2700K	80	960	293	100	IP20	10mm	25m
MF328V120A80-D030A1A10106C	120	24V	9.6	3000K	80	1,008	307	105	IP20	10mm	25m
MF328W120A80-D040A1A10106C	120	24V	9.6	4000K	80	1,056	322	110	IP20	10mm	25m
MF328W120A80-D050A1A10106C	120	24V	9.6	5000K	80	1,056	322	110	IP20	10mm	25m
MF328W120A80-D060A1A10106C	120	24V	9.6	6500K	80	1,056	322	110	IP20	10mm	25m

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80
CCT Range:	2700K/3000K/4000K/5000K/6500K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	960~1056Lm/m (293~322Lm/ft)
Energy Grade:	F

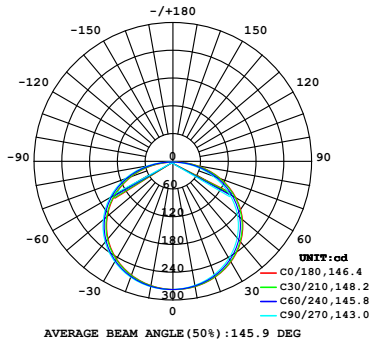

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (2.93W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	6 LEDs

Waterproof Rate




CABINET STRIP SERIES

CABINET STRIP SERIES

SUPER LONG

2835SMD/160LED
48V


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- Constant current;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width	Max length
MF428V160A90-D027A1A10106N	160	48V	14.4	2700K	90	1,814	567	126	IP20	10mm	25m
MF428V160A90-D030A1A10106N	160	48V	14.4	3000K	90	1,944	607	135	IP20	10mm	25m
MF428W160A90-D040A1A10106N	160	48V	14.4	4000K	90	2,016	630	140	IP20	10mm	25m
MF428W160A90-D050A1A10106N	160	48V	14.4	5000K	90	2,016	630	140	IP20	10mm	25m
MF428W160A90-D060A1A10106N	160	48V	14.4	6500K	90	2,016	630	140	IP20	10mm	25m

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	Ra>90
CCT Range:	2700K/3000K/4000K/5000K/6500K
Irritation Angle:	120°
Light Efficiency:	126~140Lm/w
Lumen Output/meter:	1814~2016Lm/m (567~630Lm/ft)
Energy Grade:	E

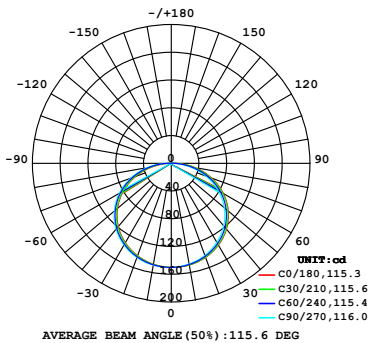

Electric parameter

Input Current/m:	0.3A/m (0.09A/ft)
Input Voltage:	DC48V(Constant Current)
Power/M:	14.4W/m (4.6W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	160LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	16 LEDs

Waterproof Rate




CABINET STRIP SERIES

SUPER LONG

2835SMD/168LED
24V


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- Constant current;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width	Max length
MF328V168A90-D027A1A10106C	168	24V	12	2700K	90	1,448	439	120	IP20	10mm	20m
MF328V168A90-D030A1A10106C	168	24V	12	3000K	90	1,520	463	127	IP20	10mm	20m
MF328W168A90-D040A1A10106C	168	24V	12	4000K	90	1,600	488	133	IP20	10mm	20m
MF328W168A90-D050A1A10106C	168	24V	12	5000K	90	1,600	488	133	IP20	10mm	20m
MF328W168A90-D060A1A10106C	168	24V	12	6500K	90	1,600	488	133	IP20	10mm	20m

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K/3000K/4000K/5000K/6500K
Irritation Angle:	120°
Light Efficiency:	120~133Lm/w
Lumen Output/meter:	1448~1600Lm/m (439~488Lm/ft)
Energy Grade:	E

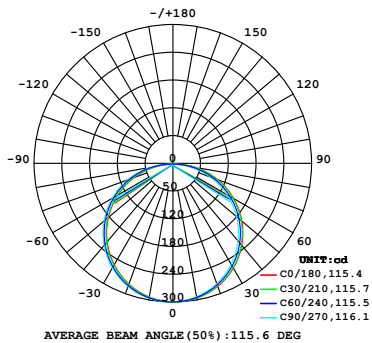

Electric parameter

Input Current/m:	0.5A/m (0.16A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	168LEDs/m
Size of Section:	41.6mm(1.64")
LEDs of Section	7 LEDs

Waterproof Rate





LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes,including indoor and outdoor decorations.From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.







DYNAMIC & PIXEL FLEX

● 2835/168LED Dim to warm


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328U168A90-D018A1A10114C	168	24V	12	1800K~4000K	80	1,200	375	120	IP20	10mm

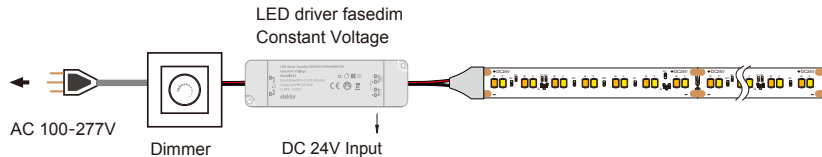

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	80
CCT Range:	1800K~4000K
Irritation Angle:	120°
Light Efficiency:	120Lm/w
Lumen Output/meter:	1200Lm/m (375Lm/ft)
Energy Grade:	B

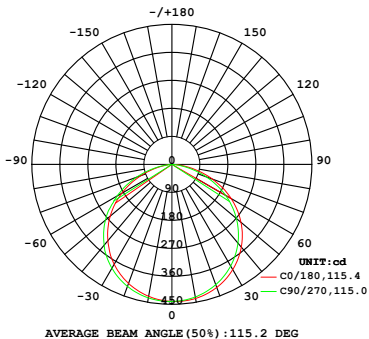


Electric parameter	
Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	168LEDs/m
Size of Section:	71.4mm(2.8")
LEDs of Section	14 LEDs

Waterproof Rate



Recommended Profiles

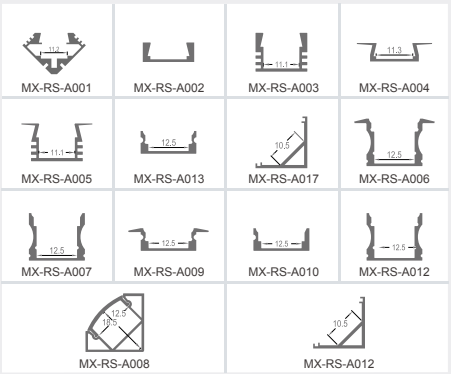


DYNAMIC & PIXEL FLEX

CCT TUNABLE

● 2835WW+W/120LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328U120A90-D801J1A10112N	60	24V	7.2	2700K	90	648	197	90	IP20	10mm
	120	24V	14.4(Max)	4000K	90	1,368	417	95	IP20	10mm
	60	24V	7.2	6500K	90	720	220	100	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K~6500K
Irritation Angle:	120°
Light Efficiency:	90~100Lm/w
Lumen Output/meter:	648~1368Lm/m (197~417Lm/ft)
Energy Grade:	F

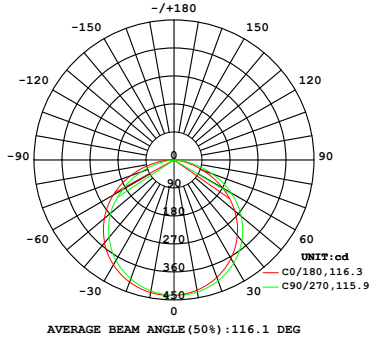

Electric parameter

Input Current/m:	0.6A/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14.4W/m (4.39W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	100mm(3.94 inch)
LEDs of Section	12 LEDs

Waterproof Rate




DYNAMIC & PIXEL FLEX

CCT TUNABLE

● 2835WW+W/168LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328U168A90-D801I1A10114N	84	24V	8.4	2700K	90	840	256	100	IP20	10mm
	168	24V	16.8(Max)	4000K	90	1,764	537	105	IP20	10mm
	84	24V	8.4	6000K	90	924	281	110	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	100~110Lm/w
Lumen Output/meter:	840~1764Lm/m (256~537Lm/ft)
Energy Grade:	F

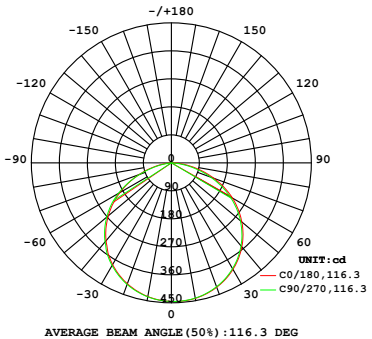

Electric parameter


Input Current/m:	0.7A/m (0.2A/ft)
Input Voltage:	DC24V
Power/M:	16.8W/m (5.1W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	168LEDs/m
Size of Section:	100mm(3.94 inch)
LEDs of Section	14 LEDs

Waterproof Rate



● 3014WW+W/240LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF331U240A90-D80111A08112N	120	24V	5	2700K	90	460	140	92	IP20	8mm
	240	24V	10(Max)	4000K	90	960	293	96	IP20	8mm
	120	24V	5	6000K	90	500	152	100	IP20	8mm

Optical parameter

LED Type:	SMD3014
Color Rendering Index:	90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	92~100Lm/w
Lumen Output/meter:	460~960Lm/m (140~293Lm/ft)
Energy Grade:	F

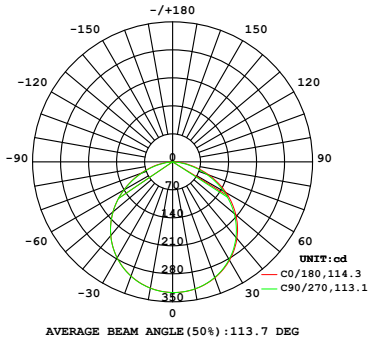

Electric parameter


Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	10W/m (3.1W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	50mm(1.97 inch)
LEDs of Section	12 LEDs

Waterproof Rate



● 2216WW+W/240LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF322U240A90-D80111A10112N	120	24V	9.6	2700K	90	768	234	80	IP20	10mm
	240	24V	19.2(Max)	4000K	90	1,632	497	85	IP20	10mm
	120	24V	9.6	6500K	90	816	249	85	IP20	10mm

Optical parameter

LED Type:	SMD2216
Color Rendering Index:	90
CCT Range:	2700K~6500K
Irritation Angle:	120°
Light Efficiency:	80~85Lm/w
Lumen Output/meter:	768~1632Lm/m (234~497Lm/ft)
Energy Grade:	G

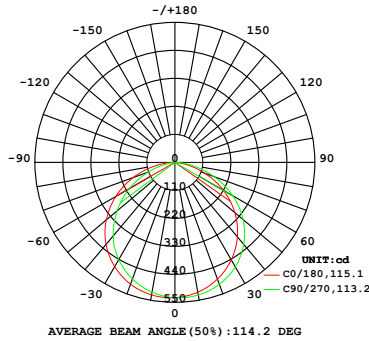

Electric parameter

Input Current/m:	0.8A/m (0.24A/ft)
Input Voltage:	DC24V
Power/M:	19.2(max)W/m (5.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	50mm(1.97 inch)
LEDs of Section	12 LEDs

Waterproof Rate




DYNAMIC & PIXEL FLEX

CCT TUNABLE

● 2835WW+W/240LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328U240A90-D80111A10112N	120	24V	12	2700K	90	1,080	329	90	IP20	10mm
	240	24V	24(Max)	4000K	90	2,280	695	95	IP20	10mm
	120	24V	12	6000K	90	1,200	366	100	IP20	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	90~100Lm/w
Lumen Output/meter:	1080~2280Lm/m (329~695Lm/ft)
Energy Grade:	F

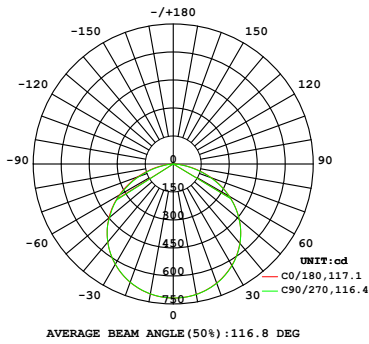


Electric parameter

Input Current/m:	1(max)A/m (0.3A/ft)
Input Voltage:	DC24V
Power/M:	24(max)W/m (7.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	240LEDs/m
Size of Section:	50mm(1.97 inch)
LEDs of Section	12 LEDs

Waterproof Rate



Recommended Profiles

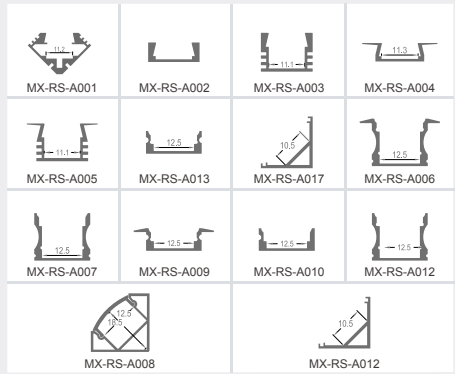


DYNAMIC & PIXEL FLEX

CCT TUNABLE

● 3527WW+W/120LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF327U120A90-D80111A10112N	60	24V	7.2	2700K	90	580	153	81	IP20	10mm
	120	24V	14.4(Max)	4000K	90	1,200	329	83	IP20	10mm
	60	24V	7.2	6000K	90	630	164	88	IP20	10mm

Optical parameter

LED Type:	SMD3527
Color Rendering Index:	90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	88Lm/w Max
Lumen Output/meter:	580~1200Lm/m (153~329Lm/ft)
Energy Grade:	G

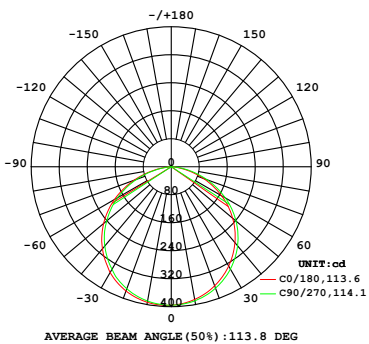


Electric parameter

Input Current/m:	0.6(max)CA/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14.4(max)W/m (5.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm(1.97 inch)
LEDs of Section	12 LEDs

Waterproof Rate




Recommended Profiles

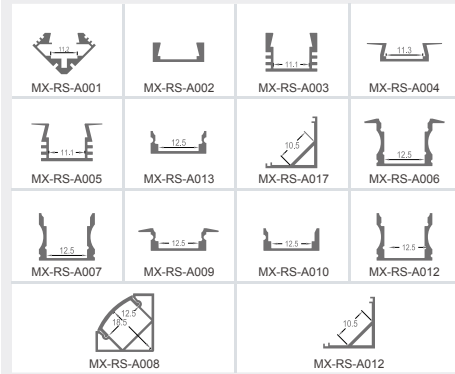

● 5050RGB/30LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350A030A00-D000J1A10106N	30	24V	2.4	Red(620-630nm)	90	60	18	25	IP20	10mm
	30	24V	2.4	Green(518-525nm)	90	166	51	69	IP20	10mm
	30	24V	2.4	Blue(460-470nm)	90	42	13	18	IP20	10mm
	30	24V	7.2	RGB	90	268	84	37	IP20	10mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	N/A
CCT Range:	RGB
Irritation Angle:	120°
Light Efficiency:	25~69Lm/w
Lumen Output/meter:	42~268Lm/m (13~84Lm/ft)
Energy Grade:	N/A

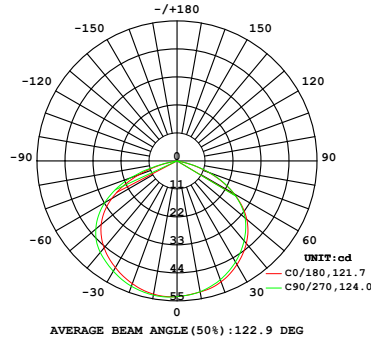

Electric parameter


Input Current/m:	0.3(max)A/m (0.09A/ft)
Input Voltage:	DC24V
Power/M:	7.2(max)W/m (5.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	30LEDs/m
Size of Section:	167mm(6.57")
LEDs of Section	5 LEDs

Waterproof Rate



● 5050RGB/60LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350A060A00-D000J1A10106N	60	24V	4.8	Red(620-630nm)	N/A	120	37	33	IP20	10mm
	60	24V	4.8	Green(515-525nm)	N/A	360	110	75	IP20	10mm
	60	24V	4.8	Blue(460-470nm)	N/A	101	31	21	IP20	10mm
	60	24V	14.4	RGB	N/A	586	177	41	IP20	10mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	N/A
CCT Range:	RGB
Irritation Angle:	120°
Light Efficiency:	33~75Lm/w
Lumen Output/meter:	101~586Lm/m (31~177Lm/ft)
Energy Grade:	N/A

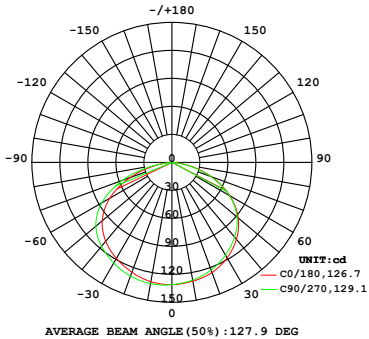

Electric parameter


Input Current/m:	0.6(Max)CA/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14.4(max)W/m (4.39W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate



● 4040RGB/120LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF344A120A00-D00J1A10106N	120	24V	6.4	Red(620-625nm)	N/A	211	64	33	IP20	10mm
	120	24V	6.4	Green(520-525nm)	N/A	480	146	75	IP20	10mm
	120	24V	6.4	Blue(460-470nm)	N/A	134	41	21	IP20	10mm
	120	24V	19.2	10000K	>80	787	240	41	IP20	10mm

Optical parameter

LED Type:	SMD4040
Color Rendering Index:	N/A
CCT Range:	RGB
Irritation Angle:	120°
Light Efficiency:	21~75Lm/w
Lumen Output/meter:	134~787Lm/m (41~240Lm/ft)
Enery Grade:	N/A

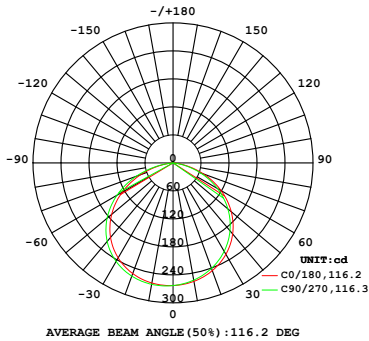

Electric parameter


Input Current/m:	0.8(max)A/m (0.24A/ft)
Input Voltage:	DC24V
Power/M:	19.2(max)W/m (5.86W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	6 LEDs

Waterproof Rate



● 5050RGBW/60LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350Z060A80-D040K1A12106N	60	24V	3.6	Red(620-625nm)	N/A	100	30	28	IP20	12mm
	60	24V	3.6	Green(520-525nm)	N/A	240	73	67	IP20	12mm
	60	24V	3.6	Blue(460-470nm)	N/A	65	20	18	IP20	12mm
	60	24V	3.6	3000K/4000K/6000K	>80	370	113	103	IP20	12mm
	60	24V	14.4	RGBW	>80	775	236	544	IP20	12mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	80
CCT Range:	RGBW
Irritation Angle:	120°
Light Efficiency:	18~544Lm/w
Lumen Output/meter:	65~775Lm/m (20~236Lm/ft)
Enery Grade:	N/A

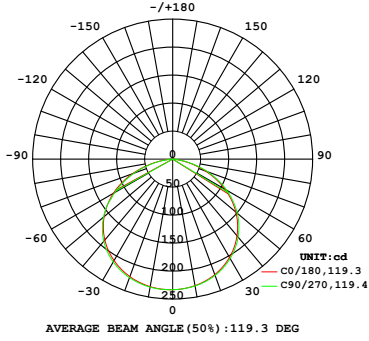

Electric parameter


Input Current/m:	0.6(max)CA/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14.4(max)W/m (5.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate



● 5050RGBW/84LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350Z084A80-D040K1A12106N	84	24V	4.8	Red(620-625nm)	N/A	110	34	23	IP20	12mm
	84	24V	4.8	Green(520-525nm)	N/A	480	146	100	IP20	12mm
	84	24V	4.8	Blue(460-470nm)	N/A	100	30	21	IP20	12mm
	84	24V	4.8	3000K/4000K/6000K	>80	420	128	88	IP20	12mm
	84	24V	19.2	RGBW	N/A	1,110	338	58	IP20	12mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	>80
CCT Range:	RGBW
Irritation Angle:	120°
Light Efficiency:	23~100Lm/w
Lumen Output/meter:	110~1110Lm/m (34~338Lm/ft)
Energy Grade:	N/A

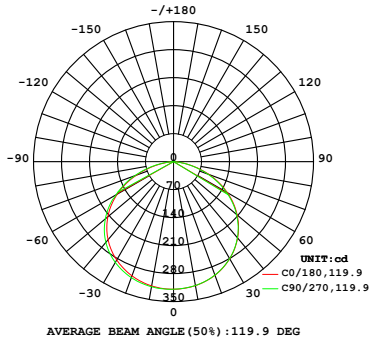

Electric parameter


Input Current/m:	0.8(max)A/m (0.24A/ft)
Input Voltage:	DC24V
Power/M:	19.2(max)W/m (5.9W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	84LEDs/m
Size of Section:	71mm(2.8")
LEDs of Section	6 LEDs

Waterproof Rate



● 5050RGBW/96LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350Z096A80-D040K1A12106N	96	24V	5	Red(620-625nm)	N/A	155	47	31	IP20	12mm
	96	24V	5	Green(520-525nm)	N/A	440	111	88	IP20	12mm
	96	24V	5	Blue(460-470nm)	N/A	95	29	19	IP20	12mm
	96	24V	5	3000K/4000K/6000K	>80	360	110	72	IP20	12mm
	96	24V	20	RGBW	>80	1,045	319	82	IP20	12mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	>80
CCT Range:	RGBW
Irritation Angle:	120°
Light Efficiency:	31~88Lm/w
Lumen Output/meter:	95~1045Lm/m (29~319Lm/ft)
Energy Grade:	N/A

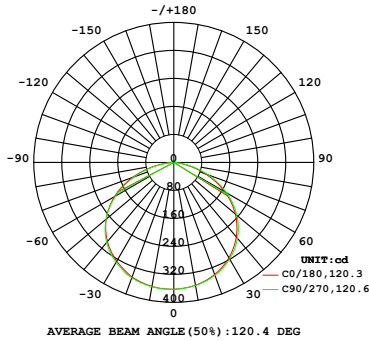

Electric parameter


Input Current/m:	0.84(max)CA/m (0.26A/ft)
Input Voltage:	DC24V
Power/M:	20(max)W/m (6.1W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	96LEDs/m
Size of Section:	62.5mm(2.5")
LEDs of Section	6 LEDs

Waterproof Rate



● 5050RGBWW/60LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350X060A80-D801L1A12106N	60	24V	2.8	Red(620-625nm)	N/A	70	21	34	IP20	12mm
	60	24V	2.8	Green(520-525nm)	N/A	252	77	70	IP20	12mm
	60	24V	2.8	Blue(460-470nm)	N/A	40	12	14	IP20	12mm
	60	24V	2.8	2700K	>80	286	>85	100	IP20	12mm
	60	24V	2.8	6000K	>80	290	>88	104	IP20	12mm
	60	24V	2.8	6800K	>80	930	>284	86	IP20	12mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	>80
CCT Range:	RGBWW
Irritation Angle:	120°
Light Efficiency:	14~104Lm/w
Lumen Output/meter:	40~930Lm/m (12~290Lm/ft)
Energy Grade:	N/A

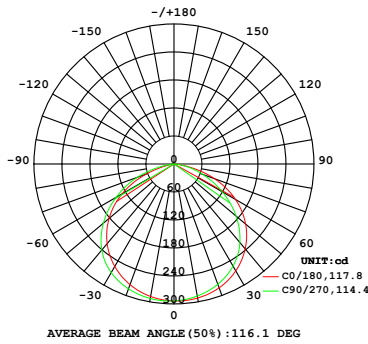


Electric parameter

Input Current/m:	0.6(max)A/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14.4(max)W/m (4.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate




Recommended Profiles

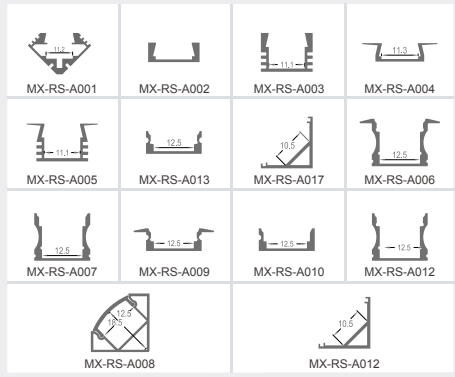

● 5050RGBWW 96LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350X096A80-D801L1A12106N	96	24V	4.2	Red(620-625nm)	N/A	120	37	29	IP20	12mm
	96	24V	4.2	Green(520-525nm)	N/A	400	122	95	IP20	12mm
	96	24V	4.2	Blue(460-470nm)	N/A	70	21	17	IP20	12mm
	96	24V	4.2	2700K	>80	475	>145	113	IP20	12mm
	96	24V	4.2	6000K	>80	490	>149	117	IP20	12mm
	30	24V	21	6500K	>80	1,555	474	74	IP20	12mm

Optical parameter

LED Type:	SMD5050
Color Rendering Index:	>80
CCT Range:	RGBWW
Irritation Angle:	120°
Light Efficiency:	29~117Lm/w
Lumen Output/meter:	70~1555Lm/m (21~474Lm/ft)
Energy Grade:	N/A

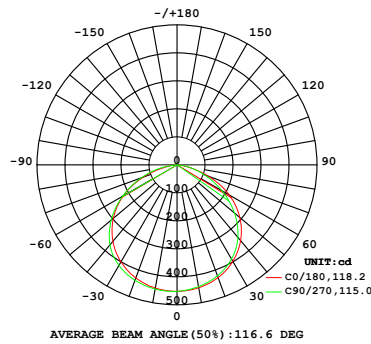

Electric parameter


Input Current/m:	0.87(max)A/m (0.26A/ft)
Input Voltage:	DC24V
Power/M:	21(max)W/m (6.4W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	96LEDs/m
Size of Section:	62.5mm(2.46")
LEDs of Section	6 LEDs

Waterproof Rate



● 5050RGB+2835CCT 72LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350X072A80-D801L1A12118N	72	24V	1.5	Red(620-625nm)	N/A	40	12	27	IP20	12mm
	72	24V	1.5	Green(520-525nm)	N/A	130	40	87	IP20	12mm
	72	24V	1.5	Blue(460-470nm)	N/A	30	9	20	IP20	12mm
	72	24V	3	2700K	>80	330	101	110	IP20	12mm
	72	24V	3	6000K	>80	340	100	113	IP20	12mm
	72	24V	3	6500K	>80	870	265	83	IP20	12mm

Optical parameter

LED Type:	SMD5050+2835
Color Rendering Index:	>80
CCT Range:	RGB+CCT
Irritation Angle:	120°
Light Efficiency:	20~113Lm/w
Lumen Output/meter:	40~870Lm/m (12~265Lm/ft)
Energy Grade:	N/A

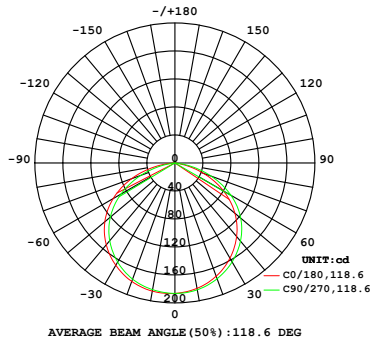


Electric parameter

Input Current/m:	0.43(max)CA/m (0.13A/ft)
Input Voltage:	DC24V
Power/M:	10.5(max)W/m (3.28W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	72LEDs/m
Size of Section:	250mm(9.8")
LEDs of Section	18 LEDs

Waterproof Rate



Recommended Profiles

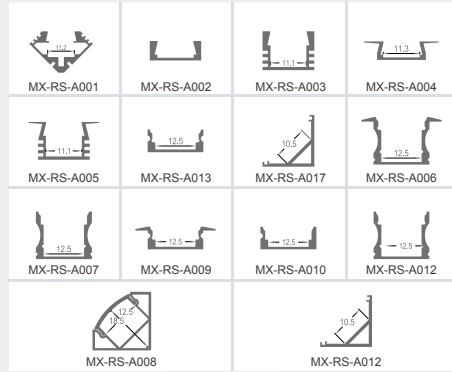

● 5050RGB+2835CCT
90LEDs


- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,5 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF350X090A80-D801L1A12118N	90	24V	2	Red(620-625nm)	N/A	45	14	23	IP20	12mm
	90	24V	2	Green(520-525nm)	N/A	160	49	69	IP20	12mm
	90	24V	2	Blue(460-470nm)	N/A	35	11	18	IP20	12mm
	90	24V	2	2700K	>80	300	>91	91	IP20	12mm
	90	24V	3	6000K	>80	310	>95	96	IP20	12mm
	90	24V	12	RGBW	>80	815	249	67	IP20	12mm

Optical parameter

LED Type:	SMD5050+SMD2835
Color Rendering Index:	>80
CCT Range:	RGB+CCT
Irritation Angle:	120°
Light Efficiency:	23~96Lm/w
Lumen Output/meter:	35~815Lm/m (11~249Lm/ft)
Energy Grade:	N/A

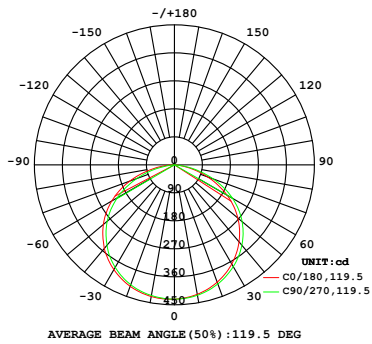

Electric parameter


Input Current/m:	0.5(max)A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12(max)W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	90LEDs/m
Size of Section:	200mm(7.9")
LEDs of Section	18 LEDs

Waterproof Rate



● 5050RGB 60LED DMX512

- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A060A00-D000K1A12106X	60	12V	12	RGB	N/A	GS8512 15MA	IP20	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	DMX512
CCT Range:	RGB(GS8512)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Energy Grade:	N/A

Electric parameter

Input Current/m:	0.5(max)CA/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate




Controller (DMX512)

Part number:	MR-328DW+T13
Input Voltage:	12-24V DC
Protocol :	DMX512
Output Wattage:	12V<240W, 24V<480W
Output signal:	2.4GHz
Dimension:	86*86*36.5(mm)
Weight:	152g
IP Rate:	IP20




Recommended Profiles

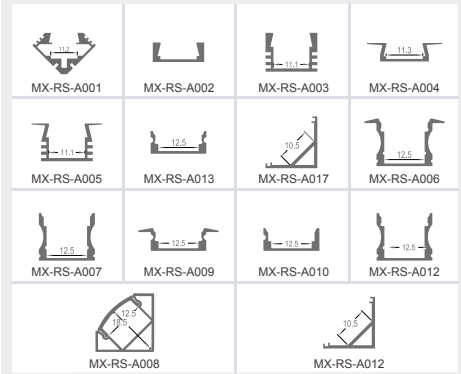

● 5050RGB 70LED DMX512

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A070A00-D000K1A12107X	70	24V	12	RGB	N/A	SM18512PS 18MA	IP65	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	DMX512
CCT Range:	RGB(SM18512PS)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter


Input Current/m:	0.5(max)A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12(max)W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	70LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	7 LEDs

Waterproof Rate




Controller (DMX512)

Part number:	MR-328DW+T13
Input Voltage:	12-24V DC
Protocol :	DMX512
Output Wattage:	12V<240W, 24V<480W
Output signal:	2.4GHz
Dimension:	86*86*36.5(mm)
Weight:	152g
IP Rate:	IP20


DMX512 RGBW Decoder

DMX512 Master control&Remote

Recommended Profiles

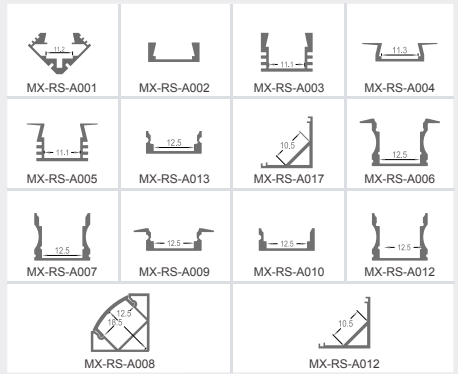

● 5050RGB 80LED DMX512

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A080A00-D000K1A12110X	80	24V	10	RGB	N/A	SM18512PS 18MA	IP65	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	DMX512
CCT Range:	RGB(SM18512PS)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter


Input Current/m:	0.4(max)CA/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	10(max)W/m (3.1W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	80LEDs/m
Size of Section:	125mm(4.92")
LEDs of Section	10 LEDs

Waterproof Rate




Controller (DMX512)

Part number:	MR-328DW+T13
Input Voltage:	12-24V DC
Protocol :	DMX512
Output Wattage:	12V<240W, 24V<480W
Output signal:	2.4GHz
Dimension:	86*86*36.5(mm)
Weight:	152g
IP Rate:	IP20


DMX512 RGBW Decoder


DMX512 Master control&Remote

Recommended Profiles

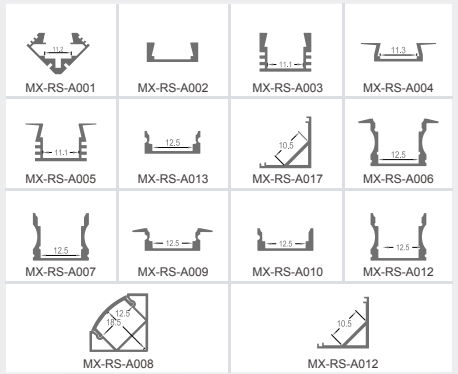

● 5050RGBW 70LED
DMX512

- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350Z070A80-D040K1A12107X	70	DC24V	17	RGBW	N/A	SM18512PS 18MA	IP65	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	DMX512
CCT Range:	RGBW(SM18512PS)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.7(max)A/m (0.21A/ft)
Input Voltage:	DC24V
Power/M:	17(max)W/m (5.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	70LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	7 LEDs

Waterproof Rate




Controller (DMX512)

Part number:	MR-328DW+T13
Input Voltage:	12-24V DC
Protocol :	DMX512
Output Wattage:	12V<240W, 24V<480W
Output signal:	2.4GHz
Dimension:	86*86*36.5(mm)
Weight:	152g
IP Rate:	IP20




Recommended Profiles

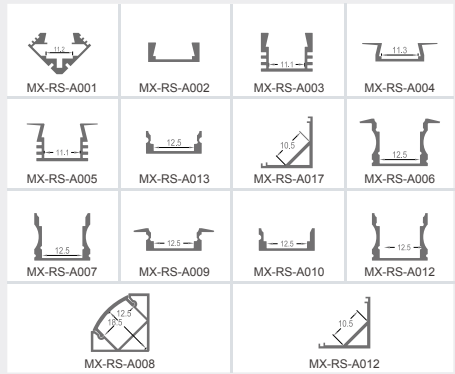

● DMX512 RGBW 60LED

- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350Z060A80-D040K1A12106X	60	24V	17	RGBW	N/A	TM512AC 18MA	IP20	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	DMX512
CCT Range:	RGBW(TM512AC)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.7(max)CA/m (0.21A/ft)
Input Voltage:	DC24V
Power/M:	17(max)W/m (5.3W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate




Controller (DMX512)

Part number:	MR-328DW+T13
Input Voltage:	12-24V DC
Protocol :	DMX512
Output Wattage:	12V<240W, 24V<480W
Output signal:	2.4GHz
Dimension:	86*86*36.5(mm)
Weight:	152g
IP Rate:	IP20




Recommended Profiles

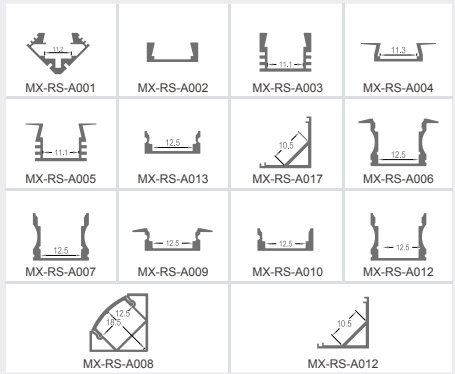

DMX512 RGBW 80LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350Z080A80-D040K1A12110X	80	DC24V	13	RGBW	N/A	SM18512PS 18MA	IP65	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	DMX512
CCT Range:	RGBW(SM18512PS)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.54(max)A/m (0.16A/ft)
Input Voltage:	DC24V
Power/M:	13(max)W/m (4.06W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	80LEDs/m
Size of Section:	125mm(4.92")
LEDs of Section	10 LEDs

Waterproof Rate




Controller (DMX512)

Part number:	MR-328DW+T13
Input Voltage:	12-24V DC
Protocol :	DMX512
Output Wattage:	12V<240W, 24V<480W
Output signal:	2.4GHz
Dimension:	86*86*36.5(mm)
Weight:	152g
IP Rate:	IP20


DMX512 RGBW Decoder


DMX512 Master control&Remote

Recommended Profiles

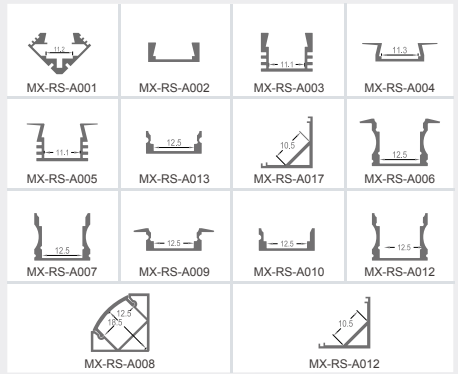

DMX512 RGBW 72LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350Z072A80-D040K1A12106X	72	24V	20	RGBW	N/A	SM18512PS 18MA	IP68	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	DMX512
CCT Range:	RGBW(SM18512PS)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.83(max)CA/m (0.25A/ft)
Input Voltage:	DC24V
Power/M:	20(max)W/m (6.25W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	72LEDs/m
Size of Section:	83.3mm(3.27")
LEDs of Section	6 LEDs

Waterproof Rate




Controller (DMX512)

Part number:	MR-328DW+T13
Input Voltage:	12-24V DC
Protocol :	DMX512
Output Wattage:	12V<240W, 24V<480W
Output signal:	2.4GHz
Dimension:	86*86*36.5(mm)
Weight:	152g
IP Rate:	IP20


DMX512 RGBW Decoder


DMX512 Master control&Remote

Recommended Profiles

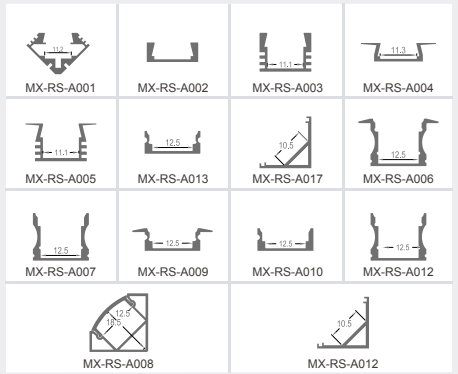

SPI 5050 84LED RGB

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A084A00-D000I1A10106S	84	24V	7	3000K	N/A	SM18512PS 18MA	IP65	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	3000K
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.29(max)A/m (0.09A/ft)
Input Voltage:	DC24V
Power/M:	7(max)W/m (2.18W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	84LEDs/m
Size of Section:	83.3mm(3.27")
LEDs of Section	7 LEDs

Waterproof Rate




Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Recommended Profiles

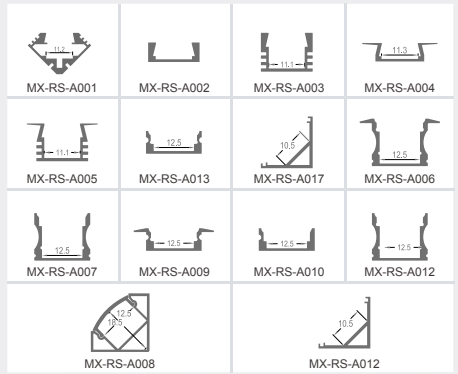

SPI RGB 60LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF250A060A00-D000J1A10103S	60	12V	8	RGB	N/A	SK6812 12MA	IP20	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(SK6812)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.66(max)CA/m (0.2A/ft)
Input Voltage:	DC12V
Power/M:	8(max)W/m (2.5W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	3 LEDs

Waterproof Rate




Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Recommended Profiles

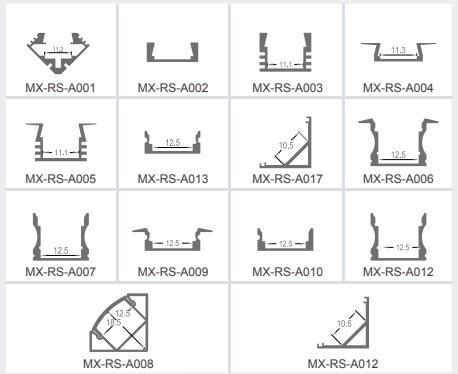

SPI RGBW 60LED

- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF250Z060A80-D040I1A10103S	60	12V	11	RGBW	N/A	SK6812 12MA	IP20	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGBW(SK6812)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	0.9(max)A/m (0.28A/ft)
Input Voltage:	DC12V
Power/M:	11(max)W/m (3.43W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	50mm(1.96 inch)
LEDs of Section	3 LEDs

Waterproof Rate




Recommended Profiles

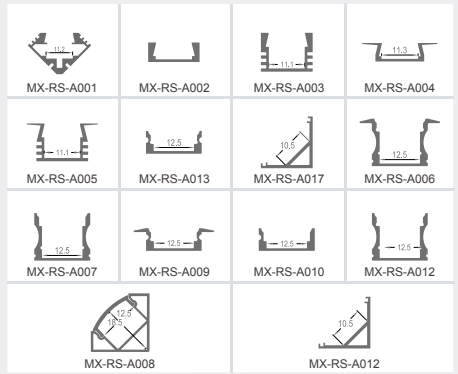

SPI RGB 60LED

- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A060A00-D000I1A10106S	60	24V	8	RGB	N/A	SK6812 12MA	IP20	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(SK6812)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	0.33(max)CA/m (0.1A/ft)
Input Voltage:	DC24V
Power/M:	8(max)W/m (2.5W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94 inch)
LEDs of Section	6 LEDs

Waterproof Rate




Recommended Profiles

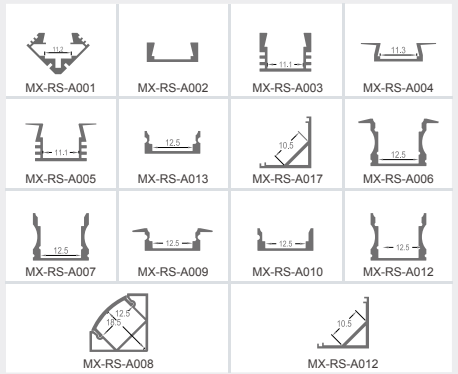

SPI RGBW 60LED

- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm, W:2700-6000K LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350Z060A80-D040I1A10106S	60	24V	11		RGBW	SK6812 12MA	IP20	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGBW(SK6812)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	0.45(max)A/m (0.14A/ft)
Input Voltage:	DC24V
Power/M:	11(max)W/m (3.43W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	6 LEDs

Waterproof Rate




Recommended Profiles

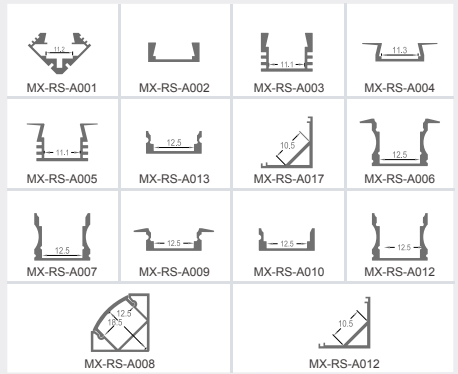

SPI RGB 30LED

- Use high quality PCB,R:620-630nm,G:515-525nm.B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF250A030A00-D000I1A10103S	30	12V	6		RGB	SK16703PB 16MA	IP20	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(SK16703PB)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	0.5(max)CA/m (0.15A/ft)
Input Voltage:	DC12V
Power/M:	6(max)W/m (1.87W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	30LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	3 LEDs

Waterproof Rate




Recommended Profiles

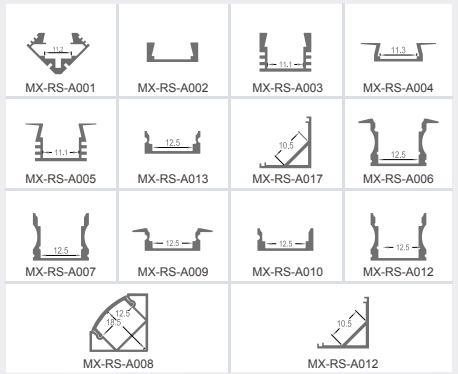

SPI RGB 60LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF250A060A00-D000I1A10103S	60	12V	12	RGB	N/A	SM16703PB 16MA	IP20	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(SM16703PB)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	1(max)A/m (0.3A/ft)
Input Voltage:	DC12V
Power/M:	12(max)W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	3 LEDs

Waterproof Rate




Recommended Profiles

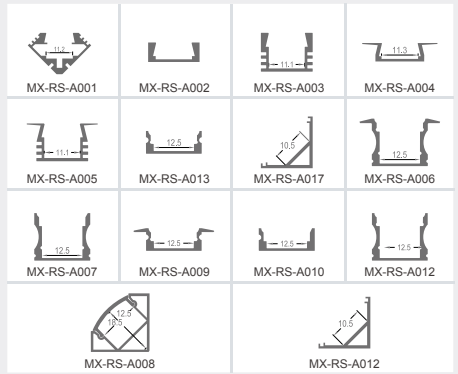

SPI RGB 60LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF250A060A00-D000I1A08103S	60	12V	12	RGB	N/A	FL1903B 17MA	IP20	8mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(FL1903B)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	1A/m (0.31A/ft)
Input Voltage:	DC12V
Power/M:	12(max)W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	60LEDs/m
Size of Section:	50mm(1.96")
LEDs of Section	3 LEDs

Waterproof Rate




Recommended Profiles

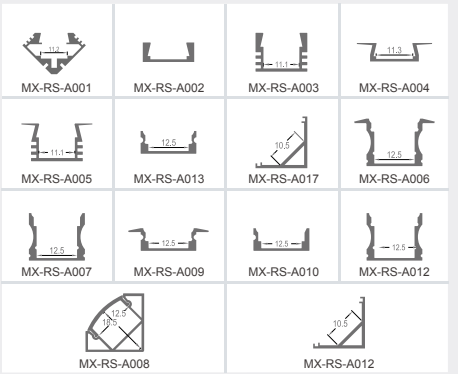

SPI RGB 84LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A084A00-D000I1A10106S	84	24V	14	RGB	N/A	SM16703PB 16MA	IP65	10mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(SM16703PB)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	0.58(max)A/m (0.18A/ft)
Input Voltage:	DC24V
Power/M:	14(max)W/m (4.37W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	84LEDs/m
Size of Section:	83.3mm(3.27")
LEDs of Section	7 LEDs

Waterproof Rate




Recommended Profiles

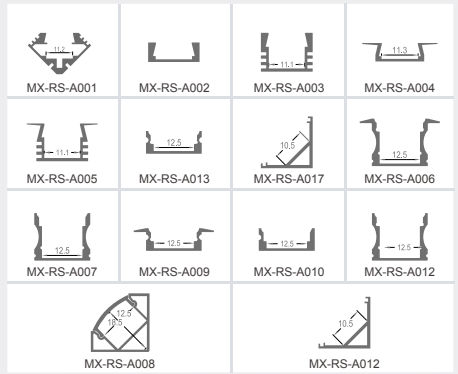

SPI RGB 84LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A084A00-D000I1A12106S	84	24V	12	RGB	N/A	FW1935 14MA	IP65	12mm

Optical parameter

LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(FW1935)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Enery Grade:	N/A

Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Electric parameter

Input Current/m:	0.5(max)A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12(max)W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	84LEDs/m
Size of Section:	83mm(3.27")
LEDs of Section	7 LEDs

Waterproof Rate




Recommended Profiles

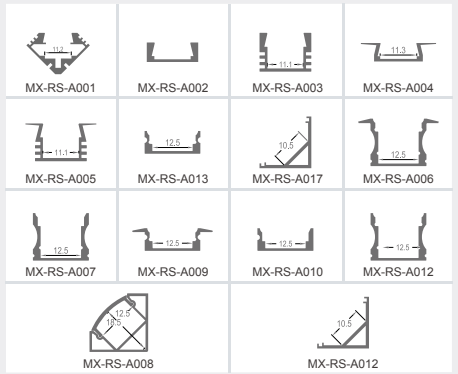

SPI RGB 84LED

- Use high quality PCB,R:620-630nm,G:515-525nm,B:5460-470nm LEDs;
- Can set with controller if you need,non waterproof and waterproof are available;
- 3M tape for installation,3 years warranty.



Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	IC Type	IP Rate	PCB width
MF350A084A00-D000I1A101065	84	24V	12	RGB	N/A	FW1935 14MA	IP65	10mm

Optical parameter	
LED Type:	SMD5050
Control protocol:	SPI
CCT Range:	RGB(FW1935)
Irritation Angle:	120°
Light Efficiency:	N/A
Lumen Output/meter:	N/A
Energy Grade:	N/A

Electric parameter	
Input Current/m:	0.5(max)A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12(max)W/m (3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	84LEDs/m
Size of Section:	83.3mm(3.27")
LEDs of Section	7 LEDs

Waterproof Rate





Controller

Part number:	SC+R9
Input Voltage:	12-24V DC
Pixel:	1024 dots
Output Wattage:	12V≤144W;24V≤288W
Output signal:	2.4GHz
Dimension:	107*58.5*9mm(L*W*H)
Weight:	34g
IP Rate:	IP20




Recommended Profiles			
 MX-RS-A001	 MX-RS-A002	 MX-RS-A003	 MX-RS-A004
 MX-RS-A005	 MX-RS-A013	 MX-RS-A017	 MX-RS-A006
 MX-RS-A007	 MX-RS-A009	 MX-RS-A010	 MX-RS-A012
 MX-RS-A008	 MX-RS-A012		

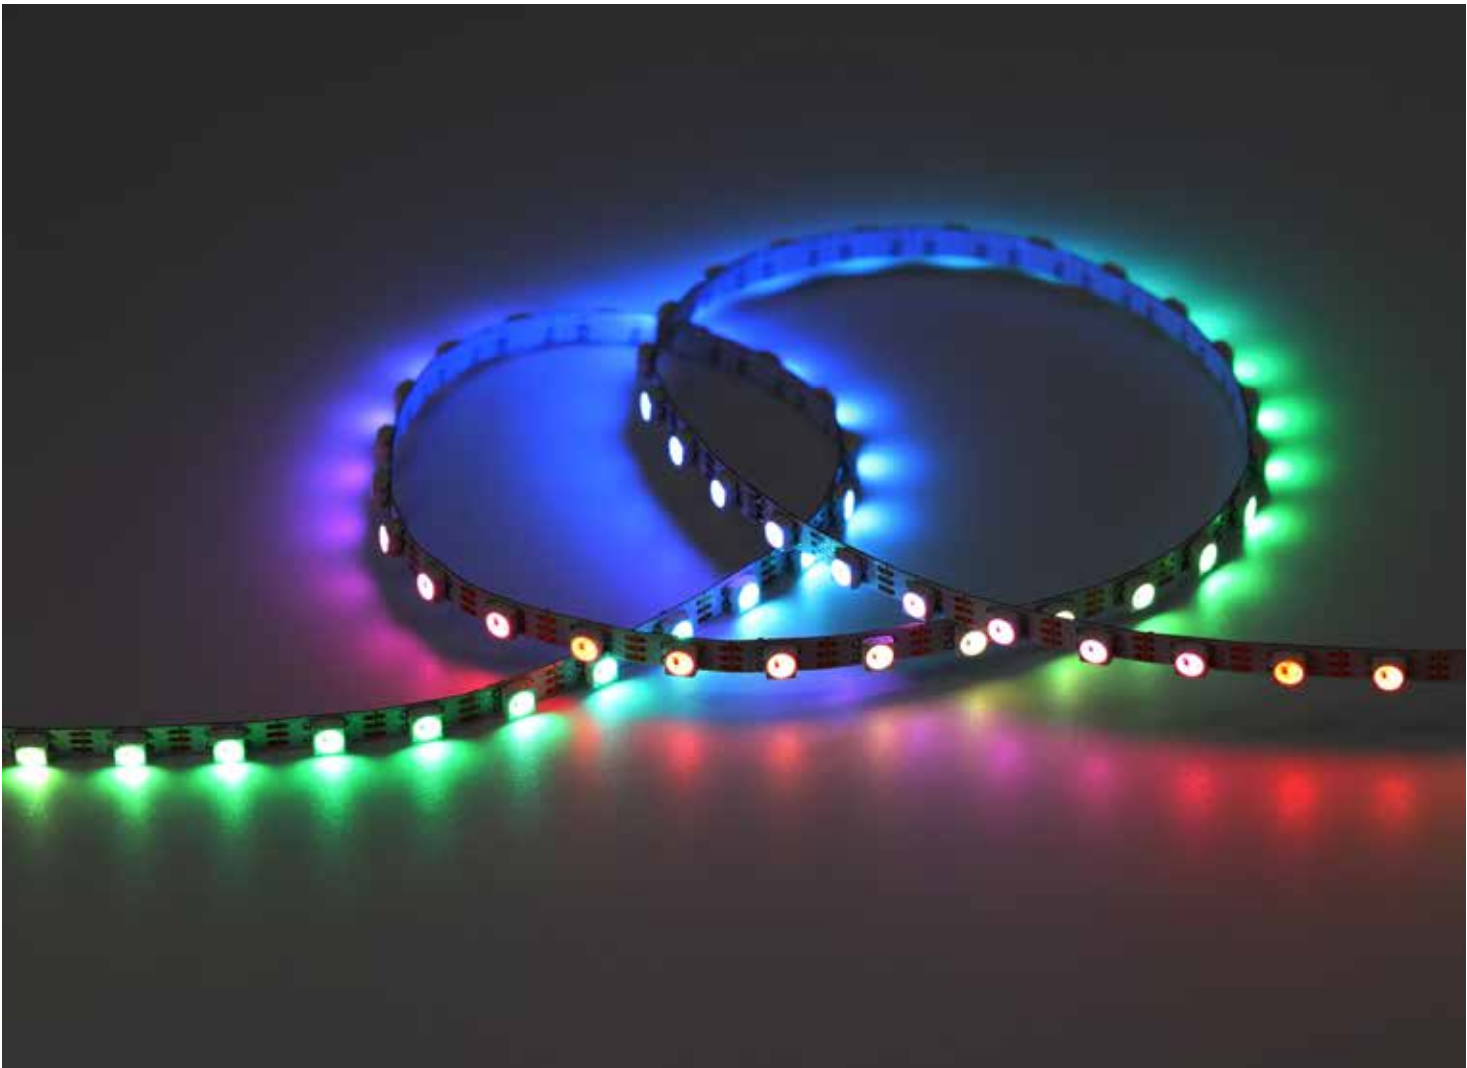

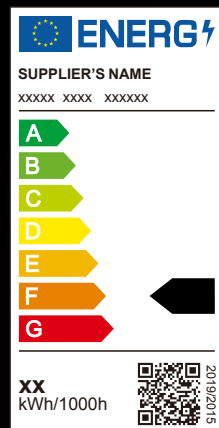

IP67 SILICON EXTRUSION

LED strip light is one of the most popular products in LED lighting market which is widely used for personal and commercial purposes,including indoor and outdoor decorations.From the background lighting of advertising banners to kitchen lighting, car ambience lighting decoration, lighting of the outskirts of city buildings, and of course a variety of commercial lighting Settings for shops, hotels, exhibitions and supermarkets.



Neon flex

Applicable place:

Swimming pool,
Park fountain,
Pedestrian street pool,
Community music fountain,
Garden stream,square water project,
Villa swimming pool,Waterscape pool,SPA pool,
Massage pool,Garden landscape,Family aquarium,etc.


IP67

Waterproof
Grade



NEON FLEX

IP67 SILICON EXTRUSION

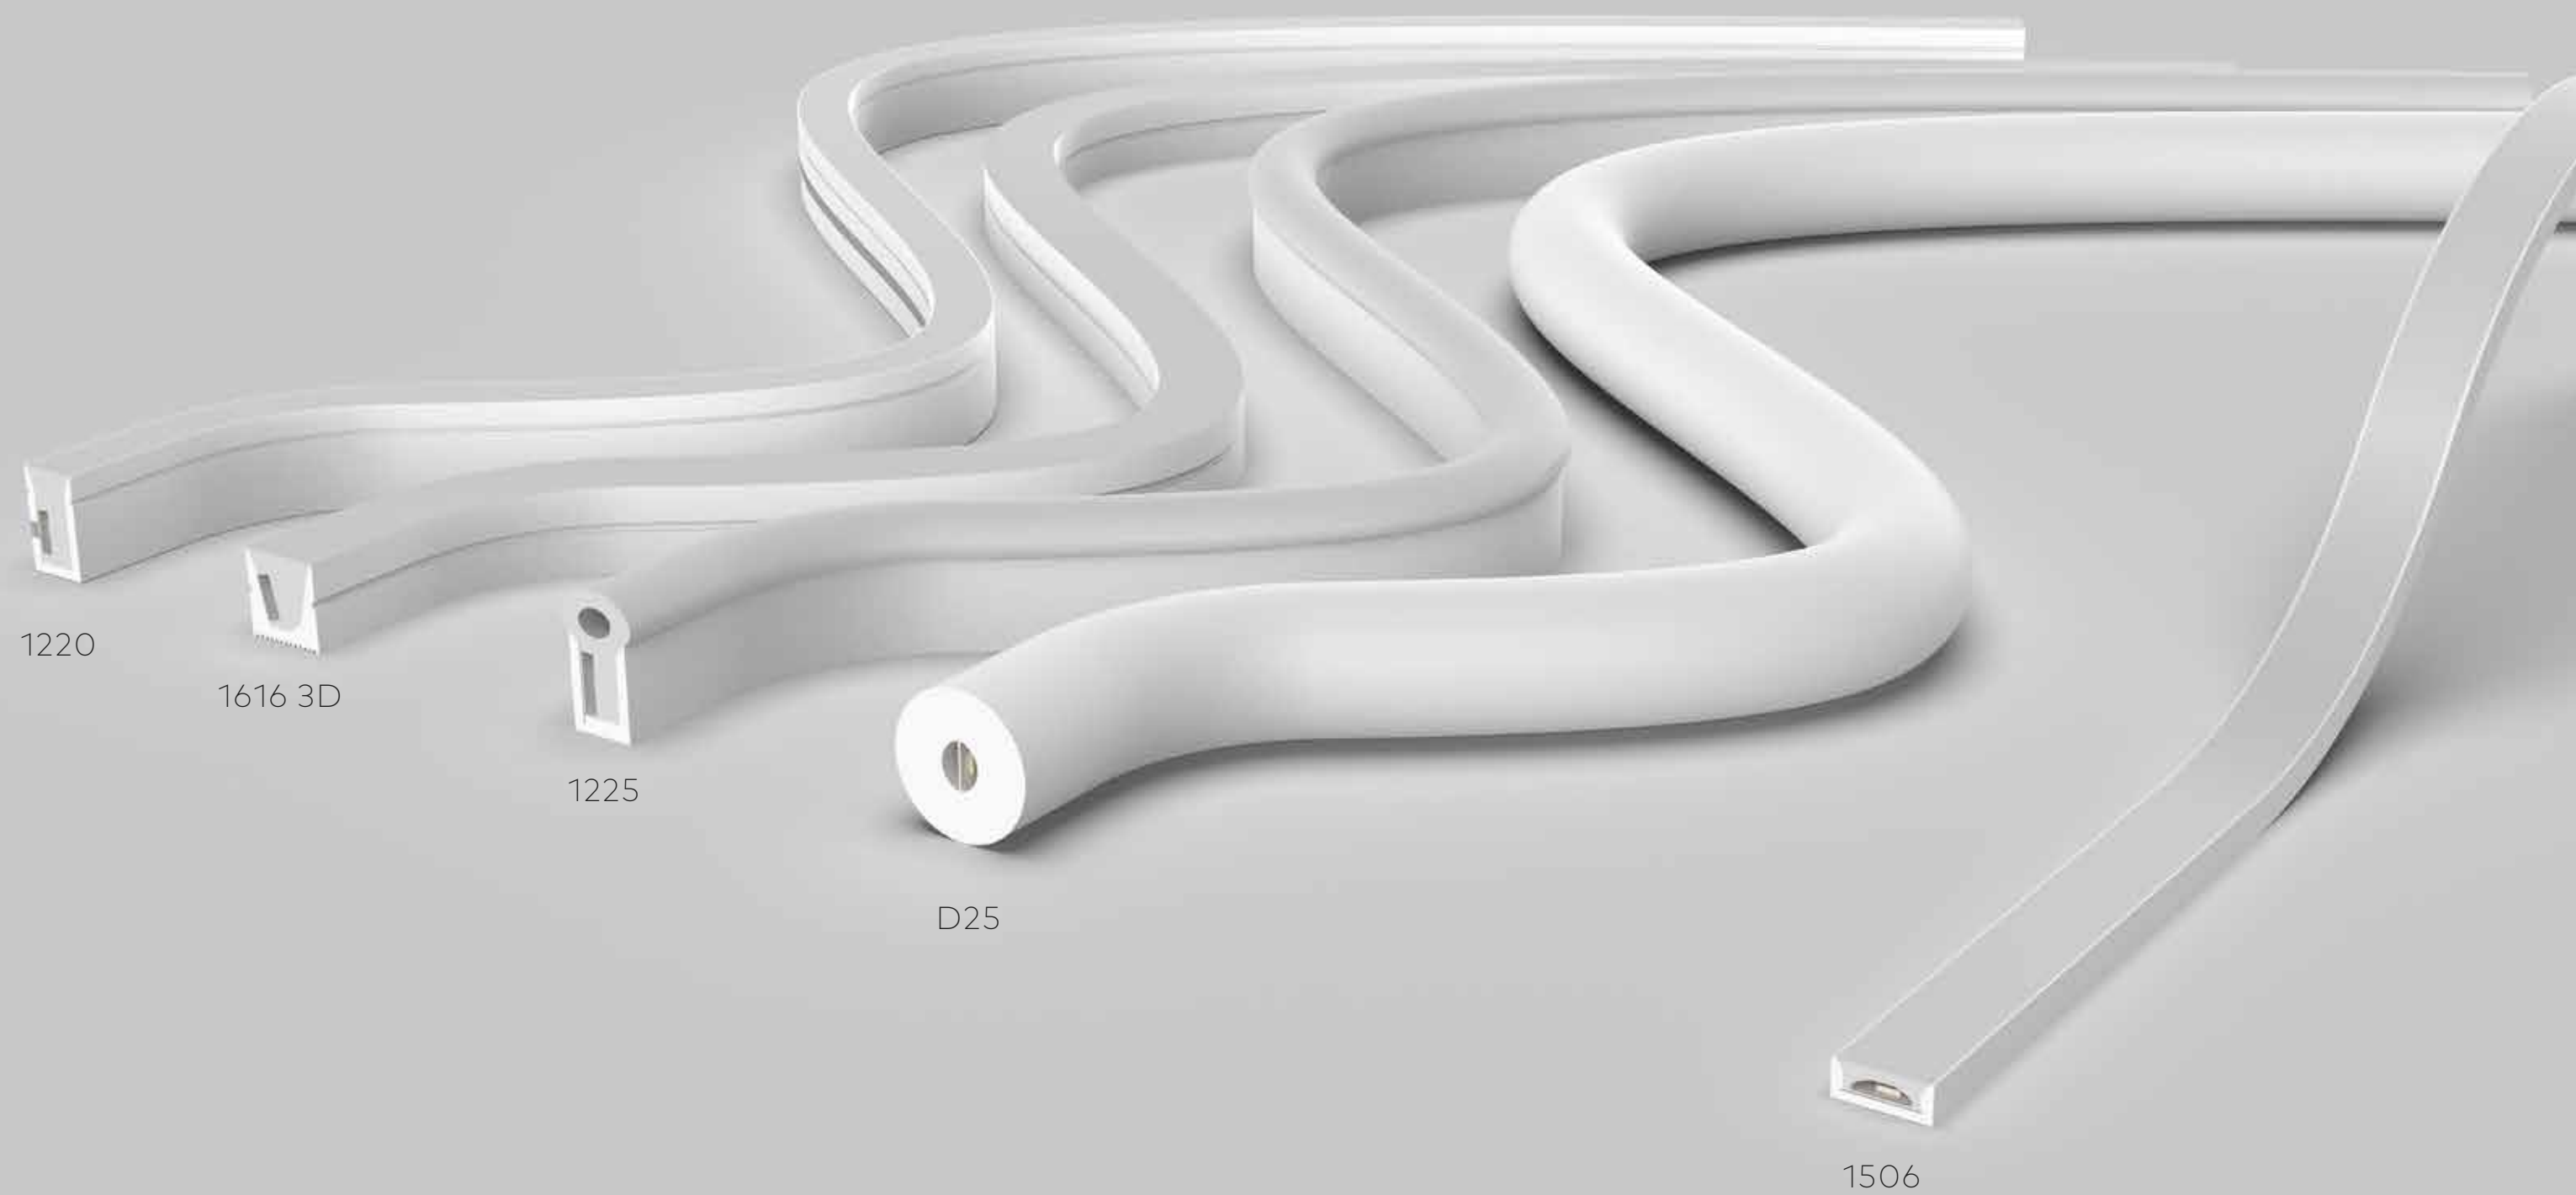

1220

1616 3D

1225

D25


1506



NEON FLEX

● 04*08mm

- High quality 0408 LED Neon Flex,With full range of colors 2100-6500K;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.




Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V140Q90-D021M6A05107N-0408CE	50mm	24V	6	2100k ⁺²⁰⁰ ₋₁₀₀	>90	199	60	33	IP67	5m
MN328V140Q90-D024M6A05107N-0408CE	50mm	24V	6	2400k ⁺²⁰⁰ ₋₁₀₀	>90	212	64	35	IP67	5m
MN328V140Q90-D027M6A05107N-0408CE	50mm	24V	6	2700k ⁺²⁰⁰ ₋₁₀₀	>90	219	67	37	IP67	5m
MN328V140Q90-D030M6A05107N-0408CE	50mm	24V	6	3000k ⁺³⁰⁰ ₋₂₀₀	>90	253	77	42	IP67	5m
MN328W140Q90-D040M6A05107N-0408CE	50mm	24V	6	4000k ⁺³⁰⁰ ₋₂₀₀	>90	223	68	37	IP67	5m
MN328W140Q90-D050M6A05107N-0408CE	50mm	24V	6	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	214	65	35	IP67	5m
MN328W140Q90-D055M6A05107N-0408CE	50mm	24V	6	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	221	67	36	IP67	5m

Optical parameter


LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2100K~5500K
Irritation Angle:	120°
Light Efficiency:	33~42Lm/w
Lumen Output/meter:	199~253Lm/m (60~77Lm/ft)
Energy Grade:	N/A

Electric parameter


Input Current/m:	0.25(max)A/m
Input Voltage:	DC24V
Power/M:	6(max)W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm
LEDs of Section	7 LEDs

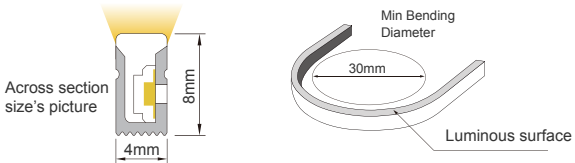

Accessories



Entry cap



End cap



Aluminium Mounting Clips
15x6.5x7.2mm(L x W x H)



Aluminium profile




04*08 strip

NEON FLEX

06*12mm


- High quality 0612 LED Neon Flex,With full range of colors 2100-5500K;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.




Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V120Q90-D021M6A08106N-0612CE	50mm	24V	10	2100k ⁺²⁰⁰ ₋₁₀₀	>90	224	68	22	IP67	5m
MN328V120Q90-D024M6A08106N-0612CE	50mm	24V	10	2400k ⁺²⁰⁰ ₋₁₀₀	>90	238	73	24	IP67	5m
MN328V120Q90-D027M6A08106N-0612CE	50mm	24V	10	2700k ⁺²⁰⁰ ₋₁₀₀	>90	252	79	25	IP67	5m
MN328V120Q90-D030M6A08106N-0612CE	50mm	24V	10	3000k ⁺³⁰⁰ ₋₂₀₀	>90	266	81	27	IP67	5m
MN328W120Q90-D040M6A08106N-0612CE	50mm	24V	10	4000k ⁺³⁰⁰ ₋₂₀₀	>90	280	85	28	IP67	5m
MN328W120Q90-D050M6A08106N-0612CE	50mm	24V	10	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	280	85	28	IP67	5m
MN328W120Q90-D055M6A08106N-0612CE	50mm	24V	10	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	280	85	28	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2100K~5500K
Irritation Angle:	120°
Light Efficiency:	22~28Lm/w
Lumen Output/meter:	224~280Lm/m (68~85Lm/ft)
Enery Grade:	N/A

Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm
LEDs of Section	6 LEDs

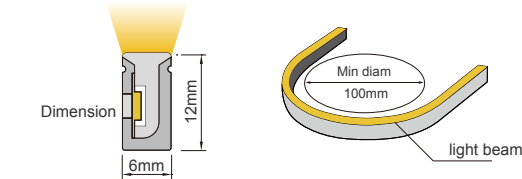

Accessories

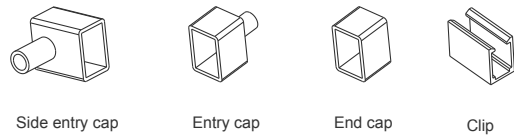


06*12 strip

NEON FLEX

08*17mm


- High quality 0817 LED Neon Flex,With full range of colors 2100-5500K;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.





Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V120Q90-D021M6A10106N-0817CE	50mm	24V	10	2100k ⁺²⁰⁰ ₋₁₀₀	>90	271	83	27	IP67	5m
MN328V120Q90-D024M6A10106N-0817CE	50mm	24V	10	2400k ⁺²⁰⁰ ₋₁₀₀	>90	285	86	28	IP67	5m
MN328V120Q90-D027M6A10106N-0817CE	50mm	24V	10	2700k ⁺²⁰⁰ ₋₁₀₀	>90	310	95	31	IP67	5m
MN328V120Q90-D030M6A10106N-0817CE	50mm	24V	10	3000k ⁺³⁰⁰ ₋₂₀₀	>90	311	95	31	IP67	5m
MN328W120Q90-D040M6A10106N-0817CE	50mm	24V	10	4000k ⁺³⁰⁰ ₋₂₀₀	>90	340	103	34	IP67	5m
MN328W120Q90-D050M6A10106N-0817CE	50mm	24V	10	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	344	105	34	IP67	5m
MN328W120Q90-D065M6A10106N-0817CE	50mm	24V	10	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	319	97	32	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2100K~5500K
Irritation Angle:	120°
Light Efficiency:	27~34Lm/w
Lumen Output/meter:	271~344Lm/m (83~105Lm/ft)
Enery Grade:	N/A

Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm
LEDs of Section	6 LEDs

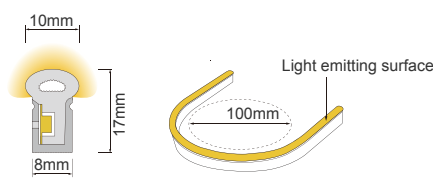

Accessories

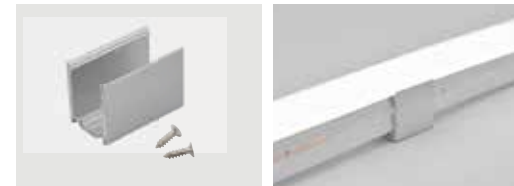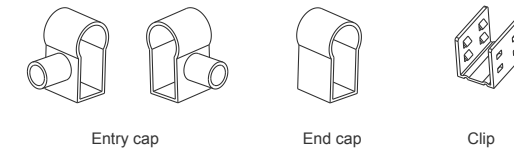

Aluminium Mounting Clips




Aluminium profile

08*17 strip

NEON FLEX


● 09*10mm

- High quality 0910 LED Neon Flex,With full range of colors 2100-5500K;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.

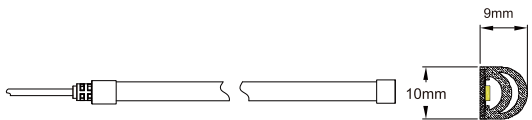


Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN322V192Q90-D021M6A06106N-0910ZE	31mm	24V	10	2100k ⁺²⁰⁰ ₋₁₀₀	>90	563	172	56	IP67	5m
MN322V192Q90-D024M6A06106N-0910ZE	31mm	24V	10	2400k ⁺²⁰⁰ ₋₁₀₀	>90	589	180	59	IP67	5m
MN322V192Q90-D027M6A06106N-0910ZE	31mm	24V	10	2700k ⁺²⁰⁰ ₋₁₀₀	>90	668	204	67	IP67	5m
MN322V192Q90-D030M6A06106N-0910ZE	31mm	24V	10	3000k ⁺³⁰⁰ ₋₂₀₀	>90	681	204	68	IP67	5m
MN328W192Q90-D040M6A06106N-0910ZE	31mm	24V	10	4000k ⁺³⁰⁰ ₋₂₀₀	>90	720	220	72	IP67	5m
MN328W192Q90-D050M6A06106N-0910ZE	31mm	24V	10	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	720	220	72	IP67	5m
MN328W192Q90-D055M6A06106N-0910ZE	31mm	24V	10	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	720	220	72	IP67	5m


Optical parameter	
LED Type:	SMD2216
Color Rendering Index:	>90
CCT Range:	2100K~5500K
Irritation Angle:	160°
Light Efficiency:	56~72Lm/w
Lumen Output/meter:	563~720Lm/m (172~220Lm/ft)
Enery Grade:	N/A
Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	192LEDs/m
Size of Section:	31mm
LEDs of Section	6 LEDs



Accessories



Entry cap



End cap



PVC Mounting Clips





PVC profile

NEON FLEX


● 13*12mm

- High quality 1312 LED Neon Flex,With full range of colors 2400-5500K/RGB;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.

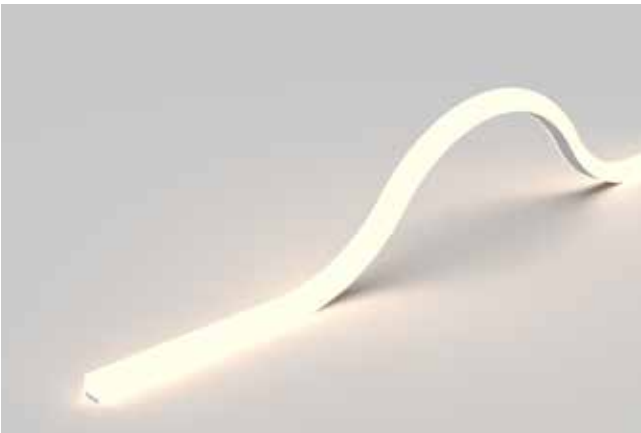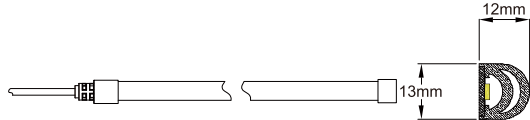


Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V140Q90-D024M6A10106N-1312ZE	50mm	24V	10	2400k ⁺²⁰⁰ ₋₁₀₀	>90	714	218	71	IP67	5m
MN328V140Q90-D027M6A10106N-1312ZE	50mm	24V	10	2700k ⁺²⁰⁰ ₋₁₀₀	>90	765	233	77	IP67	5m
MN328V140Q90-D030M6A10106N-1312ZE	50mm	24V	10	3000k ⁺²⁰⁰ ₋₁₀₀	>90	808	246	81	IP67	5m
MN328W140Q90-D040M6A10106N-1312ZE	50mm	24V	10	4000k ⁺³⁰⁰ ₋₂₀₀	>90	850	259	85	IP67	5m
MN328W140Q90-D050M6A10106N-1312ZE	50mm	24V	10	5000k ⁺³⁰⁰ ₋₂₀₀	>90	850	259	85	IP67	5m
MN328W140Q90-D055M6A10106N-1312ZE	50mm	24V	10	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	850	259	85	IP67	5m
MN350A108Q00-D000O6A10106N-1312ZE	50mm	24V	10	RGB	N/A	N/A	N/A	N/A	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2400K~5500K/RGB
Irritation Angle:	160°
Light Efficiency:	71~85Lm/w
Lumen Output/meter:	714~850Lm/m (218~259Lm/ft)
Enery Grade:	N/A
Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm
LEDs of Section	7 LEDs

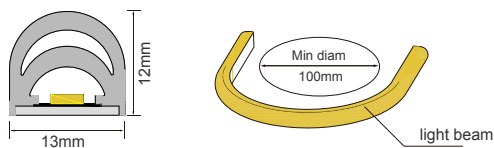

Accessories



Entry cap



End cap



PVC Mounting Clips





PVC profile

NEON FLEX


10*10mm

- High quality 1010 LED Neon Flex,With full range of colors 2100-5500K;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.

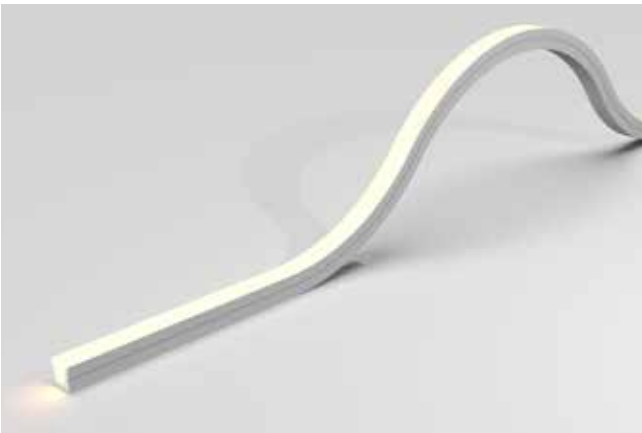


Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V168Q90-D021M6A07108N-1010ZE	50mm	24V	10	2100k ⁺²⁰⁰ ₋₁₀₀	>90	576	176	58	IP67	5m
MN328V168Q90-D024M6A07108N-1010ZE	50mm	24V	10	2400k ⁺³⁰⁰ ₋₂₀₀	>90	612	187	61	IP67	5m
MN328V168Q90-D027M6A07108N-1010ZE	50mm	24V	10	2700k ⁺²⁰⁰ ₋₁₀₀	>90	648	198	65	IP67	5m
MN328V168Q90-D030M6A07108N-1010ZE	50mm	24V	10	3000k ⁺³⁰⁰ ₋₂₀₀	>90	684	209	68	IP67	5m
MN328W168Q90-D040M6A07108N-1010ZE	50mm	24V	10	4000k ⁺³⁰⁰ ₋₂₀₀	>90	720	220	72	IP67	5m
MN328W168Q90-D050M6A07108N-1010ZE	50mm	24V	10	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	720	220	72	IP67	5m
MN328W168Q90-D055M6A07108N-1010ZE	50mm	24V	10	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	720	220	72	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2700K~5500K
Irritation Angle:	120°
Light Efficiency:	58~72Lm/w
Lumen Output/meter:	576~720Lm/m (176~220Lm/ft)
Enery Grade:	F
Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	160LEDs/m
Size of Section:	50mm
LEDs of Section	8 LEDs

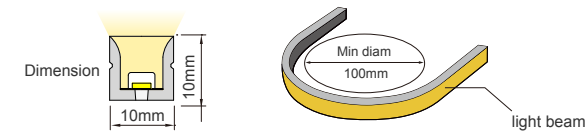

Accessories

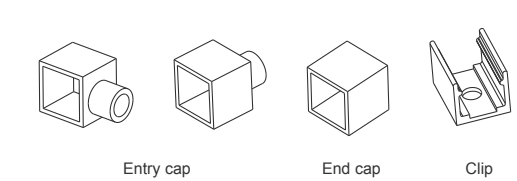

Aluminium Mounting Clips




Aluminium profile

10*10 strip

NEON FLEX


12*12mm

- High quality 1212 LED Neon Flex,With full range of colors 2400-5500K/RGB;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.



Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V140Q90-D024M6A08107N-1212ZE	50mm	24V	10	2400k ⁺²⁰⁰ ₋₁₀₀	>90	553	168	55	IP67	5m
MN328V140Q90-D027M6A08107N-1212ZE	50mm	24V	10	2700k ⁺²⁰⁰ ₋₁₀₀	>90	588	178	59	IP67	5m
MN328V140Q90-D030M6A08107N-1212ZE	50mm	24V	10	3000k ⁺³⁰⁰ ₋₂₀₀	>90	618	188	62	IP67	5m
MN328W140Q90-D040M6A08107N-1212ZE	50mm	24V	10	4000k ⁺³⁰⁰ ₋₂₀₀	>90	650	198	65	IP67	5m
MN328W140Q90-D050M6A08107N-1212ZE	50mm	24V	10	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	650	198	65	IP67	5m
MN328W140Q90-D065M6A08107N-1212ZE	50mm	24V	10	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	650	198	65	IP67	5m
MN350A120Q00-D000O6A09106N-1212ZE	50mm	24V	10	RGB	N/A	N/A	N/A	N/A	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2400K/5500K/RGB
Irritation Angle:	120°
Light Efficiency:	55~65Lm/w
Lumen Output/meter:	553~650Lm/m (168~198Lm/ft)
Enery Grade:	F
Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm
LEDs of Section	7 LEDs

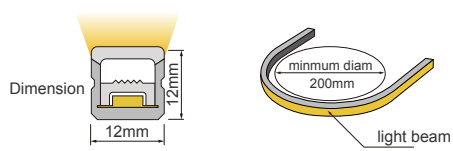

Accessories



Entry cap

Entry cap



Entry cap

End cap





Aluminium profile

12*12 strip

NEON FLEX

16*16mm

- High quality 1616 LED Neon Flex,With full range of colors 2700-5500K/RGB;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.

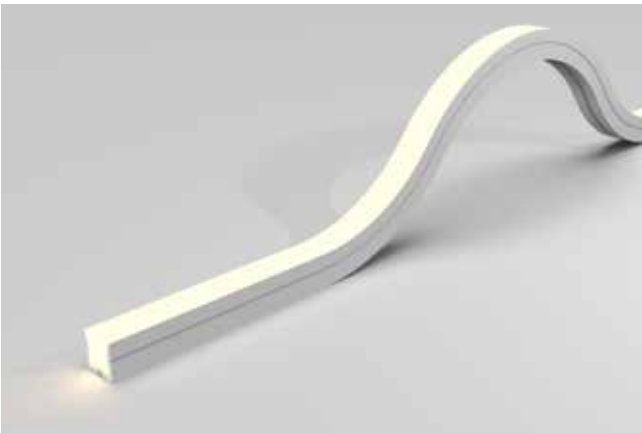


Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V140Q90-D027M6A12107N-1616ZE	50mm	24V	10	2700k ⁺²⁰⁰ ₋₁₀₀	>90	567	173	57	IP67	5m
MN328V140Q90-D030M6A12107N-1616ZE	50mm	24V	10	3000k ⁺³⁰⁰ ₋₂₀₀	>90	599	182	60	IP67	5m
MN328W140Q90-D040M6A12107N-1616ZE	50mm	24V	10	4000k ⁺³⁰⁰ ₋₂₀₀	>90	630	192	63	IP67	5m
MN328W140Q90-D050M6A12107N-1616ZE	50mm	24V	10	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	630	192	63	IP67	5m
MN328W140Q90-D065M6A12107N-1616ZE	50mm	24V	10	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	630	192	63	IP67	5m
MN350A096Q00-D000O6A12106N-1616ZE	62.5mm	24V	10	RGB	>90	N/A	N/A	N/A	IP67	5m
MN350Z196Q00-D000P6A12106N-1616ZE	71.4mm	24V	10	RGBW	>90	N/A	N/A	N/A	IP67	5m

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2700K~5500K/RGB/RGBW
Irritation Angle:	120°
Light Efficiency:	57~63Lm/w
Lumen Output/meter:	567~630Lm/m (173~192Lm/ft)
Enery Grade:	F

Electric parameter

Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	25mm
LEDs of Section	7 LEDs

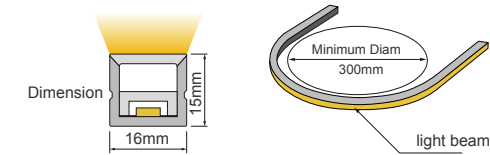

Accessories



Entry cap



Entry cap



Entry cap



End cap



Aluminium profile



16*16 strip

NEON FLEX

3D 16*16mm

- High quality 1616 LED Neon Flex,With full range of colors 2700-5500K/RGB;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.



Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V120Q90-D027M6A10106N-1616ZE	6.25mm	24V	8	2700k ⁺²⁰⁰ ₋₁₀₀	>90	444	135	56	IP67	5m
MN328V120Q90-D030M6A10106N-1616ZE	6.25mm	24V	8	3000k ⁺³⁰⁰ ₋₂₀₀	>90	469	143	59	IP67	5m
MN328W120Q90-D040M6A10106N-1616ZE	6.25mm	24V	8	4000k ⁺³⁰⁰ ₋₂₀₀	>90	493	150	62	IP67	5m
MN328W120Q90-D050M6A10106N-1616ZE	6.25mm	24V	8	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	498	152	63	IP67	5m
MN328W120Q90-D065M6A10106N-1616ZE	6.25mm	24V	8	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	503	153	63	IP67	5m
MN350A192Q00-D000N6A10106N-1616ZE	6.25mm	24V	8	RGB	N/A	N/A	N/A	N/A	IP67	5m

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2700K~5500K/RGB
Irritation Angle:	120°
Light Efficiency:	56~63Lm/w
Lumen Output/meter:	444~503Lm/m (135~153Lm/ft)
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.33(max)A/m
Input Voltage:	DC24V
Power/M:	8W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	160LEDs/m
Size of Section:	6.25mm
LEDs of Section	1 LEDs



Accessories



Entry cap



Entry cap



Entry cap



End cap



Aluminium profile



3D 16*16 strip



3D 16*16mm

- Can be bent in any direction
- High luminous efficiency
- Resistance to saline solutions, acids&alkali,corrosive gases and UV

NEON FLEX

● 12*20mm

- High quality 1220 LED Neon Flex,With full range of colors 2700-5500K/RGB/RGBW;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.





Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V140Q90-D027M6A12107N-1220CE	50mm	24V	15	2700k ⁺²⁰⁰ ₋₁₀₀	>90	376	115	25	IP67	5m
MN328V140Q90-D030M6A12107N-1220CE	50mm	24V	15	3000k ⁺³⁰⁰ ₋₂₀₀	>90	361	110	24	IP67	5m
MN328W140Q90-D040M6A12107N-1220CE	50mm	24V	15	4000k ⁺³⁰⁰ ₋₂₀₀	>90	445	136	30	IP67	5m
MN328W140Q90-D050M6A12107N-1220CE	50mm	24V	15	5000k ⁺⁴⁰⁰ ₋₃₀₀	>90	445	136	30	IP67	5m
MN328W140Q90-D065M6A12107N-1220CE	50mm	24V	15	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	441	134	29	IP67	5m
MN350A096Q00-D000O6A12106N-1220CE	50mm	24V	15	RGB	N/A	N/A	N/A	N/A	N/A	5m
MN350Z196Q00-D000P6A12106N-1220CE	50mm	24V	15	RGBW	N/A	N/A	N/A	N/A	N/A	5m

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2700K~5500K/RGB/RGBW
Irritation Angle:	120°
Light Efficiency:	25~30Lm/w
Lumen Output/meter:	361~445Lm/m (110~136Lm/ft)
Enery Grade:	N/A

Electric parameter

Input Current/m:	0.625(max)A/m
Input Voltage:	DC24V
Power/M:	15W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm
LEDs of Section	7 LEDs



Accessories



Entry cap



Entry cap



Entry cap



End cap



Aluminium profile




12*20 strip

NEON FLEX

● 12*25mm

- High quality 1225 LED Neon Flex,With full range of colors 2400-5500K;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.



Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V140Q90-D024M6A12107N-1225CE	50mm	24V	10	2400k	>90	276	92	84	IP67	5m
MN328V140Q90-D027M6A12107N-1225CE	50mm	24V	10	2700k	>90	292	98	89	IP67	5m
MN328V140Q90-D030M6A12107N-1225CE	50mm	24V	10	3000k	>90	308	103	94	IP67	5m
MN328W140Q90-D040M6A12107N-1225CE	50mm	24V	10	4000k	>90	324	108	99	IP67	5m
MN328W140Q90-D050M6A12107N-1225CE	50mm	24V	10	5000k	>90	327	109	100	IP67	5m
MN328W140Q90-D055M6A12107N-1225CE	50mm	24V	10	5500k	>90	330	110	101	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2400K~5500K
Irritation Angle:	300°
Light Efficiency:	28~33Lm/w
Lumen Output/meter:	276~330Lm/m (84~101Lm/ft)
Enery Grade:	N/A

Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm
LEDs of Section	7 LEDs



Accessories



Entry cap



Entry cap



Entry cap



End cap



Aluminium profile





12*25 strip

NEON FLEX

● 15*14mm

- High quality 1514 LED Neon Flex,With full range of colors 2400-5500K;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.

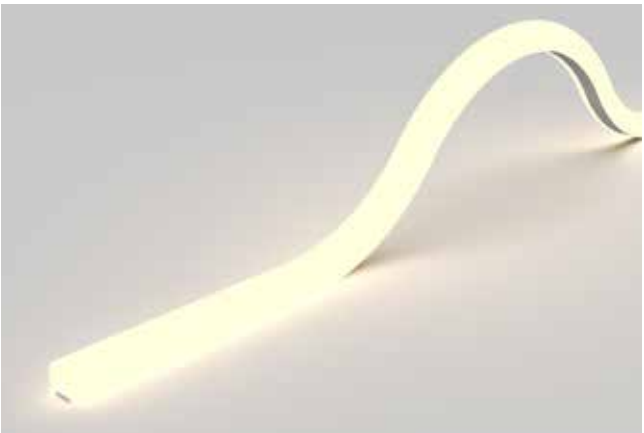

Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V120A90-D024M6A12106N-1514ZE	50mm	24V	10	2400k ^{+200 -100}	>90	680	227	207	IP67	5m
MN328V120A90-D027M6A12106N-1514ZE	50mm	24V	10	2700k ^{+200 -100}	>90	720	240	220	IP67	5m
MN328V120A90-D030M6A12106N-1514ZE	50mm	24V	10	3000k ^{+200 -100}	>90	760	254	232	IP67	5m
MN328W120A90-D040M6A12106N-1514ZE	50mm	24V	10	4000k ^{+300 -200}	>90	800	267	244	IP67	5m
MN328W120A90-D050M6A12106N-1514ZE	50mm	24V	10	5000k ^{+300 -200}	>90	808	270	246	IP67	5m
MN328W120A90-D055M6A12106N-1514ZE	50mm	24V	10	5500k ^{+400 -300}	>90	816	272	249	IP67	5m


Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2400K~5500K
Irritation Angle:	140°
Light Efficiency:	68~82Lm/w
Lumen Output/meter:	680~816Lm/m (207~249Lm/ft)
Enery Grade:	N/A

Electric parameter	
Input Current/m:	0.4(max)A/m
Input Voltage:	DC24V
Power/M:	10W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m
Size of Section:	50mm
LEDs of Section	6 LEDs

Accessories



Entry cap



End cap



Plastic clip




15*14 strip



NEON FLEX

D22mm 360°


- High quality D22mm LED Neon Flex,With full range of colors 2400-5500K/RGB;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.

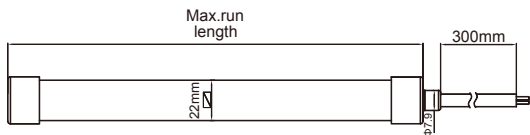


Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V240Q90-D024M6A10106N-RO22YE	50mm	24V	20	2400k ⁺²⁰⁰ ₋₁₀₀	>90	840	256	42	IP67	5m
MN328V240Q90-D027M6A10106N-RO22YE	50mm	24V	20	2700k ⁺²⁰⁰ ₋₁₀₀	>90	945	288	47	IP67	5m
MN328V240Q90-D030M6A10106N-RO22YE	50mm	24V	20	3000k ⁺²⁰⁰ ₋₁₀₀	>90	1050	320	52	IP67	5m
MN328W240Q90-D040M6A10106N-RO22YE	50mm	24V	20	4000k ⁺³⁰⁰ ₋₂₀₀	>90	1155	352	57	IP67	5m
MN328W240Q90-D050M6A10106N-RO22YE	50mm	24V	20	5000k ⁺³⁰⁰ ₋₂₀₀	>90	1218	384	63	IP67	5m
MN328W240Q90-D065M6A10106N-RO22YE	50mm	24V	20	5500k ⁺⁴⁰⁰ ₋₃₀₀	>90	1260	384	63	IP67	5m
MN344A120Q00-D000O6A10106N-RO22YE	50mm	24V	20	RGB	N/A	N/A	N/A	N/A	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>90
CCT Range:	2400K~5500K/RGB
Irritation Angle:	360°
Light Efficiency:	42~63Lm/w
Lumen Output/meter:	840~1260Lm/m (256~384Lm/ft)
Enery Grade:	N/A

Electric parameter	
Input Current/m:	0.83(max)A/m
Input Voltage:	DC24V
Power/M:	20W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	120LEDs/m*2/m
Size of Section:	50mm
LEDs of Section	6 LEDs*2

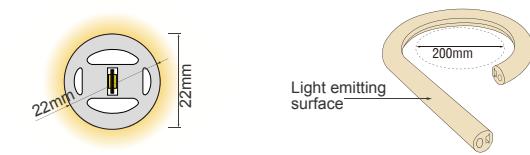

Accessories

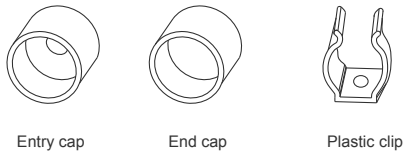

Transparent mounting clips




D22 strip

NEON FLEX

D25mm 360°

- High quality D25mm LED Neon Flex,With full range of colors 2700-6500K/RGB/SPI RGB;
- Light source 1Bin/2Bin ; CRI>90;
- Anti-yellowing,Anti-UV,saline-alkali-resistance;
- Uniform light,No light spot, Could be different shapes;
- 5 years warranty.

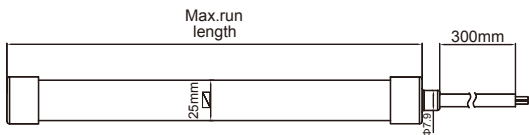


Item Code	CuttingLength (Min.)	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	Max.run length
MN328V320Q90-D027M6A10101N-RO25YE	6.25mm	24V	20	2700k ⁺²⁰⁰ ₋₁₀₀	>80	1,320	402	66	IP67	5m
MN328V320Q90-D030M6A10101N-RO25YE	6.25mm	24V	20	3000k ⁺²⁰⁰ ₋₁₀₀	>80	1,390	424	70	IP67	5m
MN328W320Q90-D040M6A10101N-RO25YE	6.25mm	24V	20	4000k ⁺³⁰⁰ ₋₂₀₀	>80	1,495	447	73	IP67	5m
MN328W320Q90-D050M6A10101N-RO25YE	6.25mm	24V	20	5000k ⁺³⁰⁰ ₋₂₀₀	>80	1,495	456	75	IP67	5m
MN328W320Q90-D065M6A10101N-RO25YE	6.25mm	24V	20	6500k ⁺⁴⁰⁰ ₋₃₀₀	>80	1,530	466	77	IP67	5m
MN344A240Q00-D000O6A12106N-RO25YE	50mm	24V	20	RGB	N/A	N/A	N/A	N/A	IP67	5m
MN250A192Q00-D000N6A10101S-RO25YE	31.25mm	24V	20	RGB SPI	N/A	N/A	N/A	N/A	IP67	5m

Optical parameter	
LED Type:	SMD2835
Color Rendering Index:	>80
CCT Range:	2700K~6500K/RGB/SPIRGB
Irritation Angle:	360°
Light Efficiency:	66~77Lm/w
Lumen Output/meter:	1320~1530Lm/m (402~466Lm/ft)
Enery Grade:	N/A

Electric parameter	
Input Current/m:	0.83(max)A/m
Input Voltage:	DC24V
Power/M:	20W/m
Static Electricity:	1000V (ESD)
LEDs/Meter:	160LEDs/m*2/m
Size of Section:	6.25mm
LEDs of Section	1 LEDs*2



Accessories

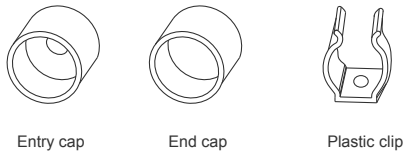

Transparent mounting clips
20x16.6x15.3mm(L x W x H)




D25 strip

TYPES OF CONNECTOR



Injection-moulded Connector

Note: Unless otherwise stated, the tolerance of the connector is ±0.5mm.

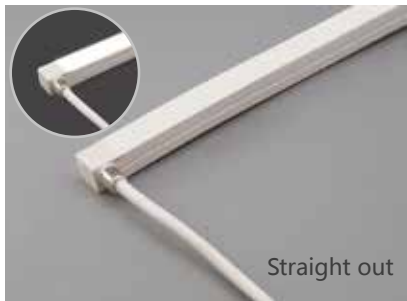



Injection-moulded Front Connector (side)

Connects light to power supply with pre-installed side feed cable, IP67. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m.

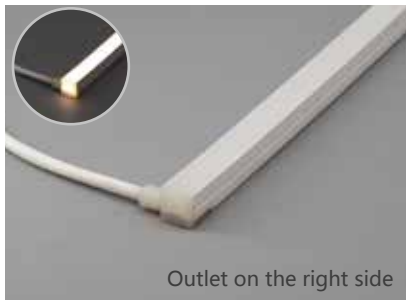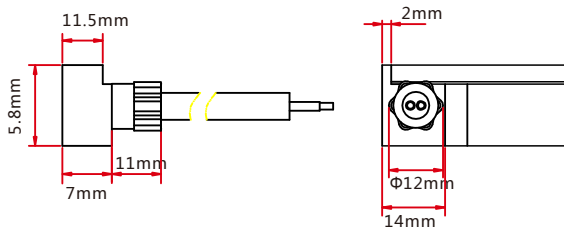



Injection-moulded Front Connector (side)

Connects light to power supply with pre-installed side feed cable, IP67. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m.

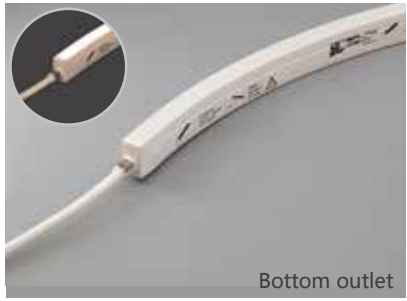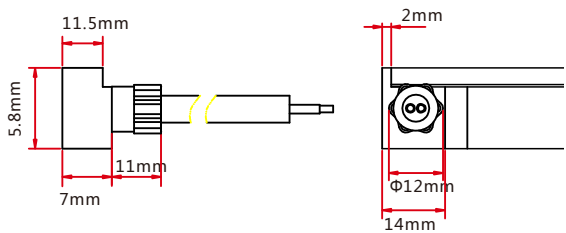


Injection-moulded Front Connector (top end)

Connects light to power supply with pre-installed end feed cable, IP67. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m.

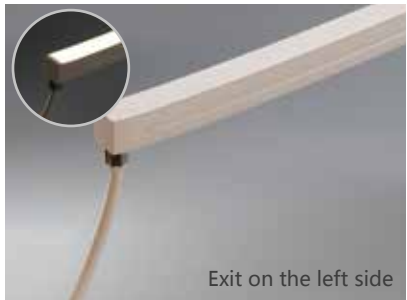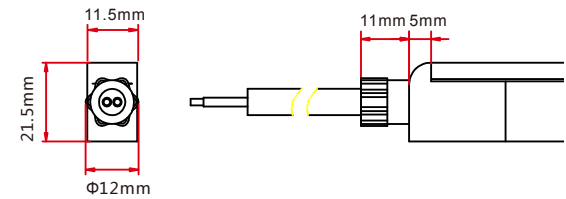

Injection-moulded Front Connector (bottom)

Connects light to power supply with pre-installed bottom feed cable, IP67. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m.

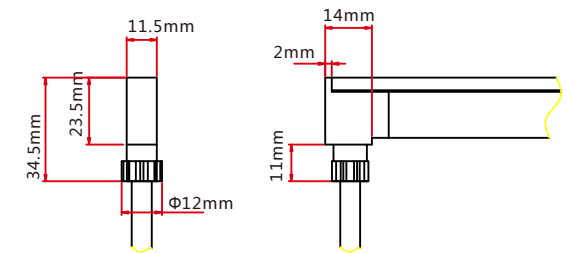

Note:For injection connectors, it is available for neonflex MX1212; MX1615; MX1220. We can customize both the length of the cable and neonflex according to the customer's needs.


Difference Neon dimensions are available With fast connect and install accessories.

IP67 LED STRIP

SLICON EXTRUSION

● 2835SMD 70LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

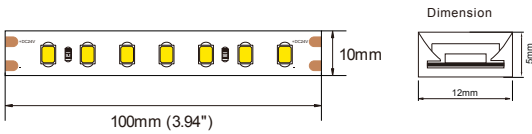

Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF328V070Q80-D0270M6A10107N	70	24V	6	2700k	80 90	648 576	202 180	108 96	IP67	10mm
MF328V070Q80-D030M6A10107N	70	24V	6	3000k	80 90	690 594	215 185	115 99	IP67	10mm
MF328W070Q80-D040M6A10107N	70	24V	6	4000k	80 90	720 612	225 191	120 102	IP67	10mm
MF328W070Q80-D050M6A10107N	70	24V	6	5000k	80 90	726 624	226 195	121 104	IP67	10mm
MF328W070Q80-D060M6A10107N	70	24V	6	6000k	80 90	726 624	226 195	121 104	IP67	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	96~121Lm/w
Lumen Output/meter:	576~726Lm/m (180~226Lm/ft)
Energy Grade:	E

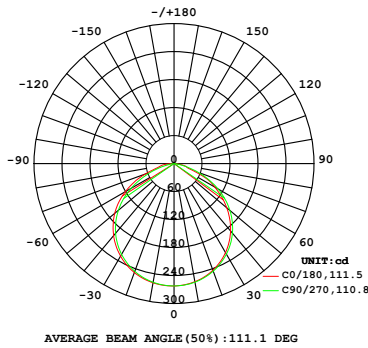

Electric parameter

Input Current/m:	0.25A/m(0.08A/ft)
Input Voltage:	DC24V
Power/M:	6W/m(1.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	70LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	7 LEDs

Waterproof Rate




IP67 LED STRIP

SLICON EXTRUSION

● 2835SMD 80LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

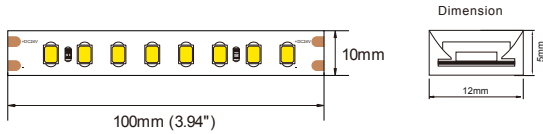

Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF328V080Q80-D0280M6A10108N	80	24V	7.2	2700k	80 90	891 774	271 236	124 107	IP67	10mm
MF328V080Q80-D030M6A10108N	80	24V	7.2	3000k	80 90	931 805	283 245	129 119	IP67	10mm
MF328W080Q80-D040M6A10108N	80	24V	7.2	4000k	80 90	990 855	301 260	137 119	IP67	10mm
MF328W080Q80-D050M6A10108N	80	24V	7.2	5000k	80 90	1,003 873	305 266	139 121	IP67	10mm
MF328W080Q80-D060M6A10108N	80	24V	7.2	6000k	80 90	1,017 882	310 269	141 122	IP67	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	107~141Lm/w
Lumen Output/meter:	774~1017Lm/m (236~310Lm/ft)
Energy Grade:	E/F

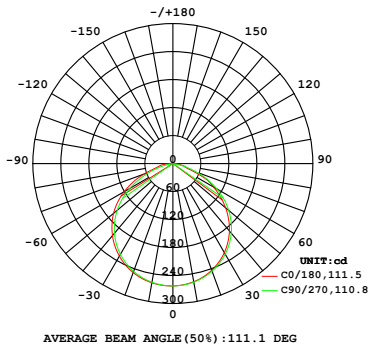

Electric parameter

Input Current/m:	0.3A/m (0.09A/ft)
Input Voltage:	DC24V
Power/M:	7.2W/m (2.25W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	80LEDs/m
Size of Section:	100mm(3.94")
LEDs of Section	8 LEDs

Waterproof Rate



Recommended Profiles			
MX-RS-A001	MX-RS-A002	MX-RS-A003	MX-RS-A004
MX-RS-A005	MX-RS-A013	MX-RS-A017	MX-RS-A006
MX-RS-A007	MX-RS-A009	MX-RS-A010	MX-RS-A012
MX-RS-A008	MX-RS-A012		




IP67 LED STRIP

SLICON EXTRUSION

● 2835SMD 126LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

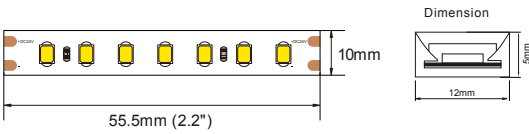

Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF328V126Q80-D0270M6A10107N	126	24V	10	2700k	80 90	1,180 1,010	360 307	118 101	IP67	10mm
MF328V126Q80-D030M6A10107N	126	24V	10	3000k	80 90	1,240 1,050	378 320	124 105	IP67	10mm
MF328W126Q80-D040M6A10107N	126	24V	10	4000k	80 90	1,314 1,131	400 345	131 113	IP67	10mm
MF328W126Q80-D050M6A10107N	126	24V	10	5000k	80 90	1,320 1,150	402 350	132 115	IP67	10mm
MF328W126Q80-D060M6A10107N	126	24V	10	6000k	80 90	1,325 1,155	404 352	132 115	IP67	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	101~132Lm/w
Lumen Output/meter:	1010~1325Lm/m (307~404Lm/ft)
Energy Grade:	E/F

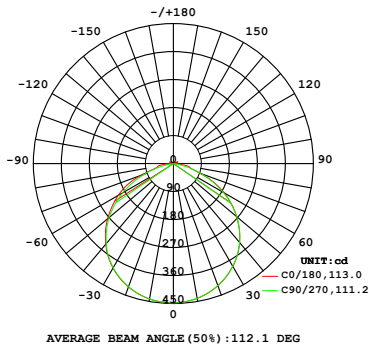

Electric parameter

Input Current/m:	0.42A/m(0.13A/ft)
Input Voltage:	DC24V
Power/M:	10W/m(1.8W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	126LEDs/m
Size of Section:	55.5mm(2.2")
LEDs of Section	7 LEDs

Waterproof Rate




IP67 LED STRIP

SLICON EXTRUSION

● 2835SMD 140LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

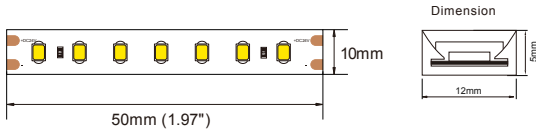

Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF328V140Q80-D0270M6A10107N	140	24V	12	2700k	80 90	1,269 1,200	87 323	112 88	IP67	10mm
MF328V140Q80-D030M6A10107N	140	24V	12	3000k	80 90	1,340 1,120	408 341	118 93	IP67	10mm
MF328W140Q80-D040M6A10107N	140	24V	12	4000k	80 90	1,410 1,179	430 389	118 98	IP67	10mm
MF328W140Q80-D050M6A10107N	140	24V	12	5000k	80 90	1,410 1,179	430 359	118 98	IP67	10mm
MF328W140Q80-D060M6A10107N	140	24V	12	6000k	80 90	1,410 1,179	430 359	118 98	IP67	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	88~118Lm/w
Lumen Output/meter:	1120~1410Lm/m (341~430Lm/ft)
Energy Grade:	E

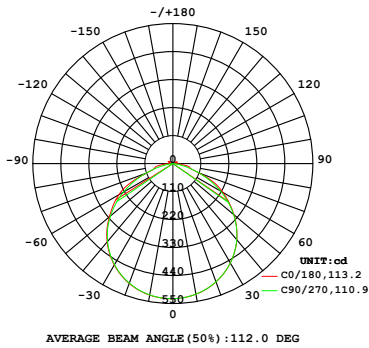

Electric parameter

Input Current/m:	0.5A/m (0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m (3.65W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	140LEDs/m
Size of Section:	50mm(1.97")
LEDs of Section	7 LEDs

Waterproof Rate



Recommended Profiles			
MX-RS-A001	MX-RS-A002	MX-RS-A003	MX-RS-A004
MX-RS-A005	MX-RS-A013	MX-RS-A017	MX-RS-A006
MX-RS-A007	MX-RS-A009	MX-RS-A010	MX-RS-A012
MX-RS-A008	MX-RS-A012		




IP67 LED STRIP

SLICON EXTRUSION

● 2835SMD 168LED


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

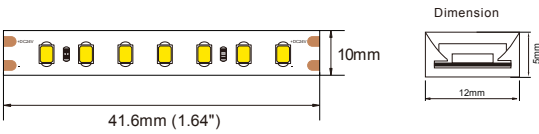

Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF328V168Q80-D0270M6A10107N	168	24V	14.4	2700k	80 90	1,715 1,475	522 449	123 105	IP67	10mm
MF328V168Q80-D030M6A10107N	168	24V	14.4	3000k	80 90	1,800 1,500	548 457	128 107	IP67	10mm
MF328W168Q80-D040M6A10107N	168	24V	14.4	4000k	80 90	1,906 1,641	581 500	136 117	IP67	10mm
MF328W168Q80-D050M6A10107N	168	24V	14.4	5000k	80 90	1,910 1,660	582 506	137 118	IP67	10mm
MF328W168Q80-D060M6A10107N	168	24V	14.4	6000k	80 90	1,915 1,700	583 518	137 121	IP67	10mm

Optical parameter

LED Type:	SMD2835
Color Rendering Index:	80/90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	105~137Lm/w
Lumen Output/meter:	1475~1915Lm/m (449~583Lm/ft)
Enery Grade:	E/F

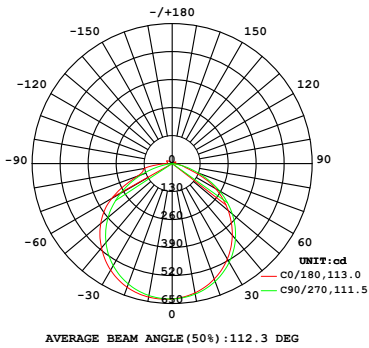

Electric parameter

Input Current/m:	0.6A/m(0.2A/ft)
Input Voltage:	DC24V
Power/M:	14.4W/m(4.5W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	168LEDs/m
Size of Section:	41.6mm(1.64 inch)
LEDs of Section	7 LEDs

Waterproof Rate





IP67 LED STRIP

SLICON EXTRUSION

● 0805 Silicon extrusion strip


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

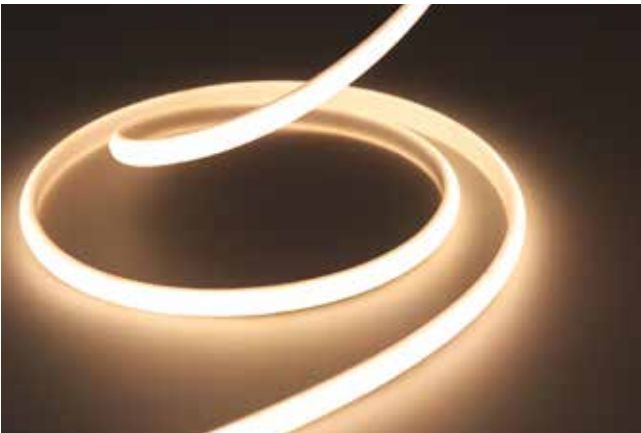

Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF304V480Q90-D027M6A06124N	480	24V	9.6	 2700k	88	778	243	81	IP67	6mm
MF304V480Q90-D030M6A06124N	480	24V	9.6	 3000k	88	797	249	83	IP67	6mm
MF304W480Q90-D040M6A06124N	480	24V	9.6	 4000k	88	826	255	85	IP67	6mm
MF304W480Q90-D050M6A06124N	480	24V	9.6	 5000k	88	826	258	86	IP67	6mm
MF304W480Q90-D060M6A06124N	480	24V	9.6	 6000k	88	826	258	86	IP67	6mm

Optical parameter

LED Type:	COB 9*22mil
Color Rendering Index:	Ra>85
CCT Range:	2700K/3000K/4000K/5000K/6000K
Irritation Angle:	120°
Light Efficiency:	81~86Lm/w
Lumen Output/meter:	778~826Lm/m (243~258Lm/ft)
Enery Grade:	G

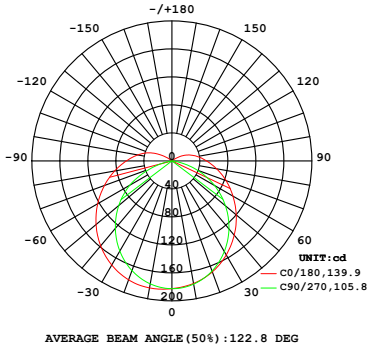

Electric parameter

Input Current/m:	0.4A/m (0.12A/ft)
Input Voltage:	DC24V
Power/M:	9.6W/m (3.2W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	480LEDs/m
Size of Section:	55.5mm(2.2 inch)
LEDs of Section	24 LEDs

Waterproof Rate



Recommended Profiles			
MX-RS-A001	MX-RS-A002	MX-RS-A003	MX-RS-A004
MX-RS-A005	MX-RS-A013	MX-RS-A017	MX-RS-A006
MX-RS-A007	MX-RS-A009	MX-RS-A010	MX-RS-A012
MX-RS-A008	MX-RS-A012		





IP67 LED STRIP

SLICON EXTRUSION

● COB 480LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.

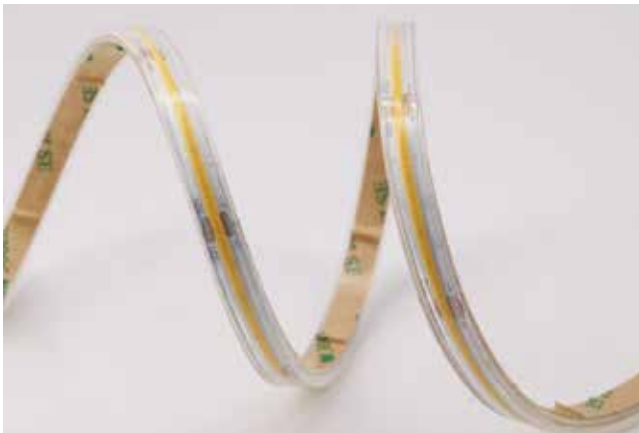

Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF309V480Q90-D027M6A06124N	480	24V	12	2700k	90	1,054	329	88	IP67	10mm
MF309V480Q90-D030M6A06124N	480	24V	12	3000k	90	1,113	347	93	IP67	10mm
MF309W480Q90-D040M6A06124N	480	24V	12	4000k	90	1,171	366	96	IP67	10mm
MF309W480Q90-D050M6A06124N	480	24V	12	5000k	90	1,182	369	98	IP67	10mm
MF309W480Q90-D060M6A06124N	480	24V	12	6000k	90	1,194	373	99	IP67	10mm

Optical parameter

LED Type:	COB
Color Rendering Index:	90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	88~99Lm/w
Lumen Output/meter:	1054~1194Lm/m (329~373Lm/ft)
Enery Grade:	E

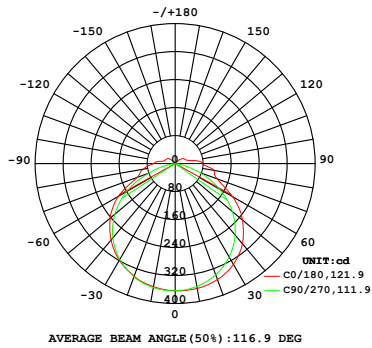

Electric parameter

Input Current/m:	0.50A/m(0.15A/ft)
Input Voltage:	DC24V
Power/M:	12W/m(3.75W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	480LEDs/m
Size of Section:	55.5mm(2.18")
LEDs of Section	24 LEDs

Waterproof Rate




IP67 LED STRIP

SLICON EXTRUSION

● COB 512LEDs


- High Quality products with full range of colors from 1800K-6500K;
- Provide 1BIN/2BIN,SDCM<3/SDCM<5;
- CRI80,CRI90,CRI95+Branded 3M tape for installation;
- 5 years warranty.



Item Code	LEDs meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB Width
MF309V512Q90-D027M6A10132N	512	24V	12	2700k	90	1,026	312	85	IP67	10mm
MF309V512Q90-D030M6A10132N	512	24V	12	3000k	90	1,026	312	85	IP67	10mm
MF309W512Q90-D040M6A10132N	512	24V	12	4000k	90	1,140	347	95	IP67	10mm
MF309W512Q90-D050M6A10132N	512	24V	12	5000k	90	1,140	347	95	IP67	10mm
MF309W512Q90-D060M6A10132N	512	24V	12	6000k	90	1,140	347	95	IP67	10mm

Optical parameter

LED Type:	COB
Color Rendering Index:	90
CCT Range:	2700K~6000K
Irritation Angle:	120°
Light Efficiency:	85~95Lm/w
Lumen Output/meter:	1026~1140Lm/m (312~347Lm/ft)
Enery Grade:	E

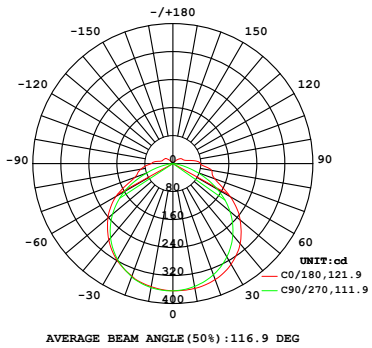

Electric parameter

Input Current/m:	0.50A/m
Input Voltage:	DC24V
Power/M:	12W/m(3.65W/ft)
Static Electricity:	1000V (ESD)
LEDs/Meter:	512LEDs/m
Size of Section:	62.5mm(2.46")
LEDs of Section	32 LEDs

Waterproof Rate



Recommended Profiles			
MX-RS-A001	MX-RS-A002	MX-RS-A003	MX-RS-A004
MX-RS-A005	MX-RS-A013	MX-RS-A017	MX-RS-A006
MX-RS-A007	MX-RS-A009	MX-RS-A010	MX-RS-A012
MX-RS-A008	MX-RS-A012		





DESK/WALL TYPE DRIVER SERIES

Product picture	Model	AC Input Voltage(V)	Rated Power(W)	Output Voltage(V)	Output Current(A)	PF	IPRating	(MM)Dimension (L*W*H)
	MX-12020A2	170-250V	20W	12V/24V	1.67A/0.83A	>0.5	IP67	153*30*20
	MX-12030A	170-250V	30W	12V/24V	2.5A/1.25A	>0.5	IP67	182*30*20
	MX-12045B	170-250V	45W	12V/24V	3.75A/1.87A	>0.5	IP67	222*29*20
	MX-12060C4	90-264V	60W	12V/24V	5A/2.5A	>0.5	IP67	192*47*35
	MX-12080C	90-264V	80W	12V/24V	6.6A/3.3A	>0.5	IP67	199*66*52
	MX-12100Z1	170-250V	100W	12V/24V	8.3A/4.2A	>0.5	IP67	213*68*39
	MX-12150S	170-250V	150W	12V/24V	12.5A/6.25A	>0.5	IP67	220*95*50
	MX-12200S1	170-250V	200W	12V/24V	16.7A/8.3A	>0.5	IP67	215*131*58

Product picture	Model	Brand	AC Input Voltage(V)	Rated Power(W)	Output Voltage(V)	Output Current(A)	PF	Working Temperature	(MM)Dimension (L*W*H)
	MX-35-LRS	Mean Well(MW)	110V/220V	35W	12V/24V	3A/1.5A	>0.5	(-)25 C (+)70 C	99*82*30mm
	MX-50-LRS	Mean Well(MW)	110V/220V	50W	12V/24V	4.2A/2.2A	>0.5	(-)25 C (+)70 C	99*82*30mm
	MX-75-LRS	Mean Well(MW)	110V/220V	75W	12V/24V	6A/3.2A	>0.5	(-)25 C (+)70 C	99*97*30mm
	MX-100-LRS	Mean Well(MW)	110V/220V	100W	12V/24V	8.5A/4.5A	>0.5	(-)25 C (+)70 C	129*97*30mm
	MX-150-LRS	Mean Well(MW)	110V/220V	150W	12V/24V	12.5A/6.5A	>0.5	(-)25 C (+)70 C	159*97*30mm
	MX-200-LRS	Mean Well(MW)	110V/220V	200W	12V/24V	17A/8.8A	>0.5	(-)25 C (+)70 C	215*115*30mm
	MX-350-LRS	Mean Well(MW)	110V/220V	350W	12V/24V	29A/14.6A	>0.5	(-)25 C (+)70 C	215*115*30mm

DESK-TYPE DRIVER SERIES

Product picture	Model	AC Input Voltage(V)	Rated Power(W)	Output Voltage(V)	Output Current(A)	PF	DC size(MM)
	MX1202000 (Wall-type)	100V-240V (50/60Hz)	24W	12V	2A	>0.5	5.5*2.1*11MM
	MX-1202000 (Desktop-type)	100V-240V (50/60Hz)	24W	12V	2A	>0.5	5.5*2.1*11MM
	MX0631203000E (Wall-type)	100V-240V (50/60Hz)	36W	12V	3A	>0.5	5.5*2.1*11MM
	MX0631203000 (Desktop-type)	100V-240V (50/60Hz)	36W	12V	3A	>0.5	5.5*2.1*11MM
	MX0631204000E (Wall-type)	100V-240V (50/60Hz)	48W	12V	4A	>0.5	5.5*2.1*11MM
	MX0631204000 (Desktop-type)	100V-240V (50/60Hz)	48W	12V	4A	>0.5	5.5*2.1*11MM
	MX1205000 (Desktop-type)	100V-240V (50/60Hz)	60W	12V	5A	>0.5	5.5*2.1*11MM
	MX1206000 (Desktop-type)	100V-240V (50/60Hz)	72W	12V	6A	>0.5	5.5*2.1*11MM
	MX2401000 (Desktop-type)	100V-240V (50/60Hz)	24W	24V	1A	>0.5	5.5*2.1*11MM
	MX0422401500 (Wall&Desktop-type)	100V-240V (50/60Hz)	36W	24V	1.5A	>0.5	5.5*2.1*11MM
	MX0422401500 (Desktop-type)	100V-240V (50/60Hz)	36W	24V	1.5A	>0.5	5.5*2.1*11MM
	MX0632402000 (Wall&Desktop-type)	100V-240V (50/60Hz)	48W	24V	2A	>0.5	5.5*2.1*11MM
	MX0632402000 (Desktop-type)	100V-240V (50/60Hz)	48W	24V	2A	>0.5	5.5*2.1*11MM
	MX0682402500 (Desktop-type)	100V-240V (50/60Hz)	60W	24V	2.5A	>0.5	5.5*2.1*11MM
	MX2403000 (Desktop-type)	100V-240V (50/60Hz)	72W	24V	3A	>0.5	5.5*2.1*11MM
	MX1002404000 (Desktop-type)	100V-240V (50/60Hz)	96W	24V	4A	>0.5	5.5*2.1*11MM

QUICK CONNECTOR

Ltem No.	Picture	Series	Strip's max LEDs/m	Max Working current	Ltem No.	Picture	Series	Strip's max LEDs/m	Max Working current
MX-04-000384		8mm IP20 Single Color	120LED/M	<3A	MX-04-000385		10mm IP20 Single Color	120LED/M	<3A
MX-04-000382		8mm IP20 Single Color	120LED/M	<3A	MX-04-000383		10mm IP20 Single Color	120LED/M	<3A
MX-04-000505		8mm IP20 Single Color	120LED/M	<3A	MX-04-000381		10mm IP20 Single Color	120LED/M	<3A
MX-04-000389		10mm IP20 Single Color	60LED/M	<3A	MX-A1-000134		10mm IP65 Single Color	60LED/M	<3A
MX-04-000386		10mm IP20 Single Color	60LED/M	<3A	MX-A1-000135		10mm IP65 Single Color	60LED/M	<3A
MX-04-000388		10mm IP20 Single Color	60LED/M	<3A	MX-A1-000136		10mm IP65 Single Color	60LED/M	<3A
MX-A1-000128		8mm IP65 Single Color	120LED/M	<3A	MX-A1-000131		10mm IP65 Single Color	120LED/M	3A
MX-A1-000129		8mm IP65 Single Color	120LED/M	<3A	MX-A1-000132		10mm IP65 Single Color	120LED/M	3A
MX-A1-000130		8mm IP65 Single Color	120LED/M	<3A	MX-A1-000133		10mm IP65 Single Color	120LED/M	3A
MX-A1-002322 strip-strip		10mm IP20 Single Color	120LED/M	3A	MX-04-002322 strip-strip		10mm IP20 Single Color	120LED/M	3A
MX-04-001328 wire-strip		10mm IP20 Single Color	120LED/M	3A	MX-04-001328 wire-strip		10mm IP20 Single Color	120LED/M	3A
MX-A1-000137 strip-strip		10mm IP20 Single Color	240LED/M	3A	MX-A1-000137 strip-strip		10mm IP20 Single Color	240LED/M	3A
MX-04-002324 wire-strip		10mm IP20 Single Color	240LED/M	3A	MX-04-002324 wire-strip		10mm IP20 Single Color	240LED/M	3A

QUICK CONNECTOR

Ltem No.	Picture	Series	Strip's max LEDs/m	Max Working current
MX-04-001404 strip-strip		10mm IP20 Single Color	120LED/M	3A
MX-04-001402 wire-strip		10mm IP20 Single Color	120LED/M	3A
MX-04-001407 strip-strip		10mm IP20 Single Color	240LED/M	3A
MX-04-001386 wire-strip		10mm IP20 Single Color	240LED/M	3A
MX-04-001389 strip-strip		10mm IP20 Single Color	120LED/M	3A
MX-04-001401 wire-strip		10mm IP20 Single Color	120LED/M	3A
MX-04-001404 strip-strip		10mm IP20 Single Color	240LED/M	3A
MX-04-001403 wire-strip		10mm IP20 Single Color	240LED/M	3A

Ltem No.	Picture	Series	Strip's max LEDs/m	Max Working current
MX-04-001327 strip-strip		12mm IP20 Single Color	60LED/M	3A
MX-04-001329 wire-strip		12mm IP20 Single Color	60LED/M	3A
MX-04-001400 strip-strip		8mm IP65 Single Color	120LED/M	3A
MX-04-001399 wire-strip		8mm IP65 Single Color	120LED/M	3A
MX-04-001408 strip-strip		10mm IP65 Single Color	60LED/M	3A
MX-04-001406 wire-strip		10mm IP65 Single Color	60LED/M	3A
MX-04-001410 strip-strip		12mm IP65 Single Color	60LED/M	3A
MX-04-001409 wire-strip		12mm IP65 Single Color	60LED/M	3A

Ltem No.	Picture	Spec.	Workable Wire	Max Working current
MX-A1-000138		Cable Joiner in 1Pin	AWG22-AWG18	9A
MX-A1-000139		Cable Joiner in 2Pin	AWG22-AWG18	9A
MX-A1-000140		T cable joiner in 1Pin	AWG22-AWG18	9A
MX-A1-000141		T cable joiner in 2Pin	AWG22-AWG18	9A

Ltem No.	Picture	Series
MX-A1-000142		8mm IP20 Strip Holder
MX-A1-000143		10mm IP20 Strip Holder
MX-A1-000144		8mm IP65 Strip Holder
MX-A1-00145		10mm IP65 Strip Holder